



Crompton


Futuristic **Lighting.**
Timeless **Trust.**

Effective 15th July, 2021

www.crompton.co.in

PRESENCE ACROSS THE NATION

Location of Crompton Facilities in India

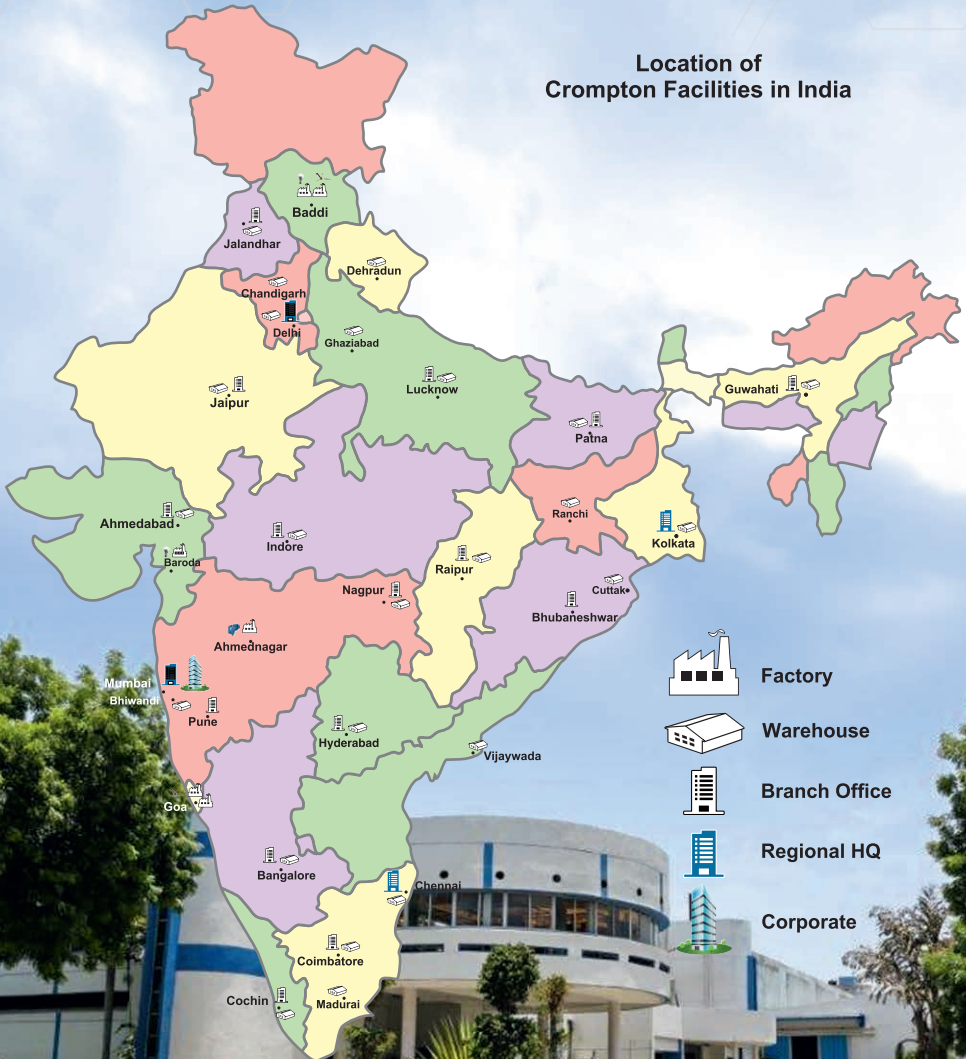

*Traditional craftsmanship.
Tomorrow's innovation*

Crompton lighting has been setting the standard for Product quality, reliability and performance. And today we're a lot more than tradition. It's why millions of people in India have come to rely on Crompton to provide comfort and convenience.

Every Crompton product has been meticulously designed and crafted to be more than robust and beautiful. It's why our customers have come to demand Crompton performance time and time again.

Crompton lighting products produce a wow response whenever you enter a household or commercial space. Products that express your personality, that reflects your lifestyle. Products that help you get the most out of all your investments. Precisely engineered, hand crafted and built to last. Our commitment is to provide the best styles and highest industry quality standards in Crompton lighting products and accessories.



05

Lighting Management System

09

Indoor Commercial Lighting

35

Industrial Lighting



45

Batten & Led Lamps

51

Cleanroom Lighting

55

Flameproof Lighting

59

Street Lighting

67

Flood Lighting

75

Landscape Lighting

81

Solar Street Lighting

85

High Mast & Poles



LIGHTING MANAGEMENT SYSTEM





LIGHTING MANAGEMENT SYSTEM

Lighting Control - Indoor

Types of Control System


- Occupancy-based control
- Daylight harvesting and dimming
- Intelligent lighting control System
 - Wireless Control
 - Power over Ethernet (PoE)



* Please contact nearest branch for assistance in designing the project.

Lighting Controls - Outdoor


- 1 Group Dimming Solutions
- 2 CCMS Solutions
- 3 Individual Light Control

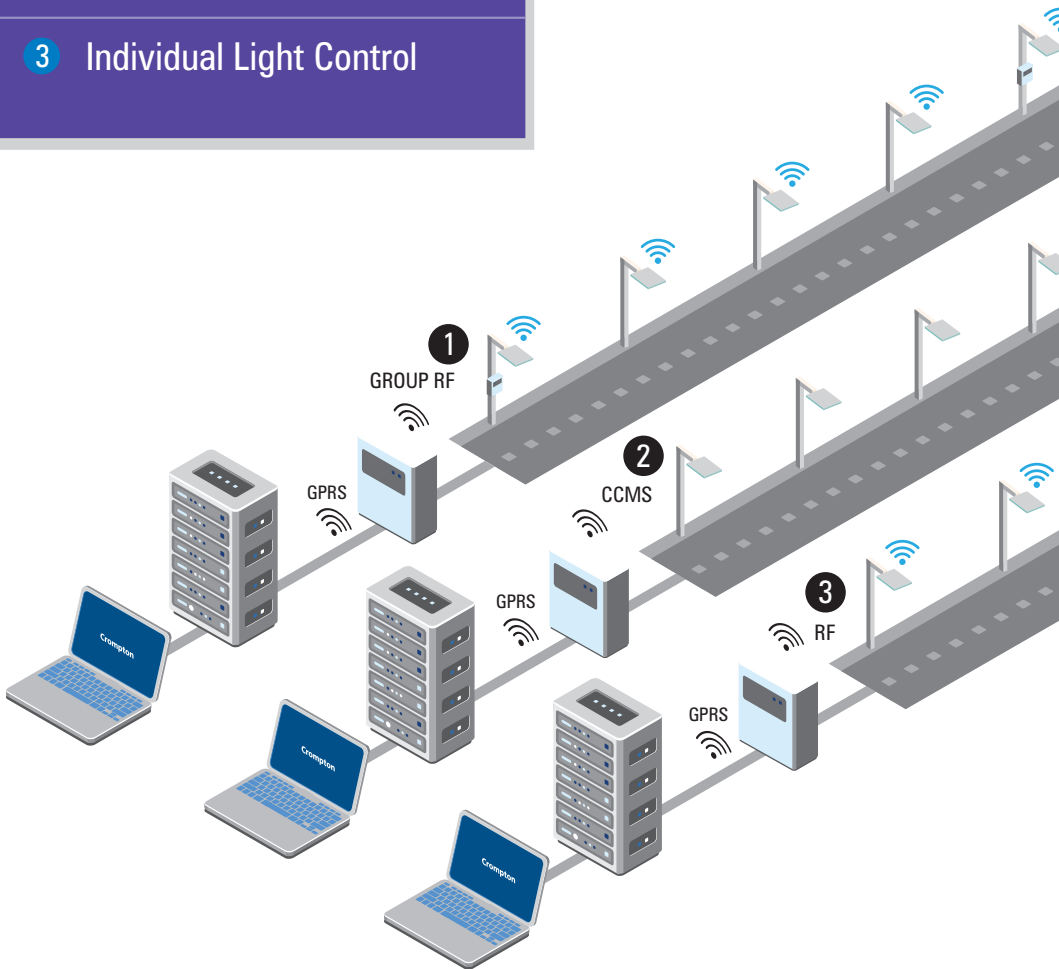

* Please contact nearest branch for assistance in designing the project.

INDOOR COMMERCIAL LIGHTING



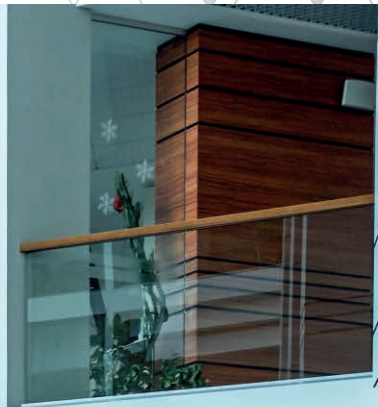

INDOOR COMMERCIAL LIGHTING




Human Centric Lighting INSPIRED BY THE SUN

CIRCADIAN RHYTHMS

A circadian rhythm is a natural, internal process that regulates the sleep-wake cycle and repeats roughly every 24 hours.

HUMAN CENTRIC LIGHT BENEFITS


- Follows Circadian rhythms
- Enhances Mood
- Improves Productivity
- Provides Visual Acuity
- Offers energy savings
- Offers sustainability
- CCT of lights follows circadian rhythm

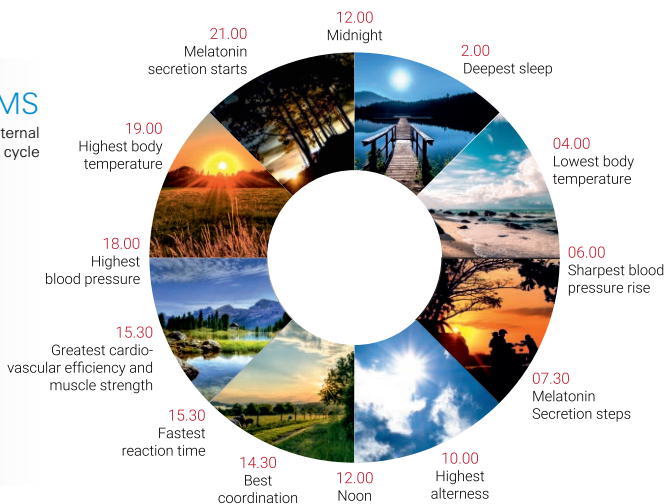

VOGUE HCL

VOGUE is an elegant suspended lighting solution with 52mm width and 75mm height. The clean design and high luminance level makes it ideal for corporate offices and institutions.

Available in Human Centric Lighting



Product Description

CCP-133-40-HCL-SL-BT-DWH

MRP (₹)

Price on Request

STELLUX - P HCL

LED STELLUX-P Recess mounted Signature series premium commercial luminaire Available in Human Centric Lighting



LG7
Compliant

IP₂₀
Ingress
Protection



<19
Unified Glare
Rating

Product Description

CCR-131-30-HCL-SL-BT-DWH

MRP (₹)

Price on Request

STELLUX - I HCL

LED STELLUX-I Recess mounted Signature series premium commercial luminaire Available in Human Centric Lighting



LG7
Compliant

IP₂₀
Ingress
Protection



<19
Unified Glare
Rating

Product Description

CCR-130-30-HCL-SL-BT-DWH

MRP (₹)

Price on Request

STYLO - O HCL

Stylo - O bring forth innovative design, circle in square shape offering emboss small panel appearance with sleek aluminum PDC body.

Available in Human Centric Lighting



Product Description

CDR-217-18-HCL-SL-BT-DWH

MRP (₹)

Price on Request

INDOOR COMMERCIAL LIGHTING

VOGUE LINE

Vogue Line is an elegant suspended lighting solution with 52mm width and 75mm height. The clean design and high luminance level makes it ideal for corporate offices and institutions. Create perfectly straight lines using the continuous mounting arrangement or go modular with geometrical shapes. Efficacy 100LM/W
CCT options 4000K, 5700K, 3000K. Available in DALI dimming option

Product Description	MRP (₹)
CCP-121-18-57-SL-NWH	7500
CCP-121-18-40-SL-NWH	7500
CCP-121-24-57-SL-NWH	8000
CCP-121-24-40-SL-NWH	8000
CCP-121-28-57-SL-NWH	8500
CCP-121-28-40-SL-NWH	8500

VOGUE CONNECTOR

VOGUE family can be joined in multiple way like L, Y, T, +.


TYPE	MRP (₹)
L - CONNECTOR	Price On Request
Y - CONNECTOR	Price On Request
T - CONNECTOR	Price On Request
+ - CONNECTOR	Price On Request



L - CONNECTOR



Y - CONNECTOR



T - CONNECTOR



+ - CONNECTOR



INDOOR COMMERCIAL LIGHTING

TREND I

Suspended linear in sleek design comes with multiple dimensions (54W x 74H & 75W x 85H) is suitable for all commercial spaces.

Available in : 36Watt & 40Watt - 4 ft, 72Watt & 80Watt - 8 ft.

*This luminaire is also available in up down light distribution.

CCT options 4000K, 5700K, 3000K. Available in DALI dimming option

Product Description	MRP (₹)
LCLP54-36-CDL	9000
LCLP54-36-TL	9000
LCLP54-36-WW	9000
LCLP54-72-CDL	16000
LCLP54-72-TL	16000
LCLP54-72-WW	16000

TREND II

Recessed mounted linear with its minimalistic shape offers complete versatility for all types of spaces such as offices, reception areas, meeting rooms and corridors.

Available in : 18W, 24W, 28W, 30W & 36W - 4 ft.

66mm, 90mm, 100mm width options

Product Description	MRP (₹)
LCLR66-30-CDL	7500
LCLR66-30-TL	7500
LCLR66-30-WW	7500
LCLR90-36-CDL	8500
LCLR90-36-TL	8500
LCLR90-36-WW	8500





INDOOR COMMERCIAL LIGHTING



ORBIT

Orbit LED cylinders employ the same quality lighting and design configuration to ensure consistent colour point between luminaires within a lighting application. Available in Black and white colour option in 5700K, 4000K, 3000K CCT. Beam angle 36°

Product Description	MRP (₹)
CDS-201-15-57-HL2-NWH	4500
CDS-201-15-40-HL2-NWH	4500
CDS-201-15-30-HL2-NWH	4500
CDS-201-20-57-HL2-NWH	4700
CDS-201-20-40-HL2-NWH	4700
CDS-201-20-30-HL2-NWH	4700
CDS-200-25-57-SL-NWH	6800
CDS-200-25-40-SL-NWH	6800
CDS-200-25-30-SL-NWH	6800
CDS-200-30-57-SL-NWH	7200
CDS-200-30-40-SL-NWH	7200
CDS-200-30-30-SL-NWH	7200
SO419005 (15W & 20W)	Price on Request*
SO419006 (25W & 30W)	Price on Request*

* Pendant accessory needs to be ordered separately.



ORBIT

Orbit LED cylinders employ the same quality lighting and design configuration to ensure consistent colour point between luminaires within a lighting application. Available in Black and white colour option in 5700K, 4000K, 3000K CCT. Beam angle 36°

Product Description	MRP (₹)
CDS-201-15-57-HL2-NBK	4500
CDS-201-15-40-HL2-NBK	4500
CDS-201-15-30-HL2-NBK	4500
CDS-201-20-57-HL2-NBK	4700
CDS-201-20-40-HL2-NBK	4700
CDS-201-20-30-HL2-NBK	4700
CDS-200-25-57-SL-NBK	6800
CDS-200-25-40-SL-NBK	6800
CDS-200-25-30-SL-NBK	6800
CDS-200-30-57-SL-NBK	7200
CDS-200-30-40-SL-NBK	7200
CDS-200-30-30-SL-NBK	7200
SO419005 (15W & 20W)	Price on Request*
SO419006 (25W & 30W)	Price on Request*

* Pendant accessory needs to be ordered separately.



FAME SPOT

New series of LED Spot Light specially designed for commercial usage Long life with 30000 burning hours with CRI > 80. Wide choice available in 3W, 6W, 9W, 12W, 15W, 18W, 24W, 30W, 40W, 50W, 3000K and 4000K CCT. Beam angle 36°, Vertical Tilt 300

Product Description	MRP (₹)
CDR-210-03-40-SL-NWH	1000
CDR-210-03-30-SL-NWH	1000
CDR-211-06-40-SL-NWH	1300
CDR-211-06-30-SL-NWH	1300
CDR-211-09-40-SL-NWH	1550
CDR-211-09-30-SL-NWH	1550
CDR-212-12-40-SL-NWH	1750
CDR-212-12-30-SL-NWH	1750
CDR-212-15-40-SL-NWH	2000
CDR-212-15-30-SL-NWH	2000
CDR-213-18-40-SL-NWH	2600
CDR-213-18-30-SL-NWH	2600
CDR-213-24-40-SL-NWH	3000
CDR-213-24-30-SL-NWH	3000
CDR-214-30-40-SL-NWH	4000
CDR-214-30-30-SL-NWH	4000
CDR-215-40-40-SL-NWH	5100
CDR-215-40-30-SL-NWH	5100
CDR-215-50-40-SL-NWH	5800
CDR-215-50-30-SL-NWH	5800



ZOOM LIGHT

Zoom light offers the most potent solution for indoor focused lighting requirements. This product suits the architectural lighting requirements for modern offices and commercial spaces. Beam angle 36°, Tilt 90°

Product Description	MRP (₹)
LCSRRA-24-CDL	5700
LCSRRA-24-TL	5700
LCSRRA-24-WW	5700

INDOOR COMMERCIAL LIGHTING



LUNAR

A timeless classic, the LUNAR is the top of its class when it comes to large disk feature lighting. With a range of 3 sizes, ideal for modern living spaces where design and interest are upper most.

Product Description	MRP (₹)
LCSUR3-25-CDL	7800
LCSUR3-25-TL	7800
LCSUR3-25-WW	7800
LCSUR4-36-CDL	8800
LCSUR4-36-TL	8800
LCSUR4-36-WW	8800
LCSUR6-40-CDL	12000
LCSUR6-40-TL	12000
LCSUR6-40-WW	12000



EPSILON

The hexagonal Epsilon is meticulously welded to resemble uniform light that softens up the overall light source and exemplifies illumination on a grand scale.

Product Description	MRP (₹)
CCP-128-36-57-SL-NWH	10000
CCP-128-36-40-SL-NWH	10000
CCP-128-36-30-SL-NWH	10000



CAPELLA

The triangular Capella is meticulously welded to resemble uniform light that softens up the overall light source and exemplifies illumination on a grand scale.

Product Description	MRP (₹)
CCP-129-36-57-SL-NBK	14000
CCP-129-36-40-SL-NBK	14000
CCP-129-36-30-SL-NBK	14000




STELLUX - I

LED STELLUX-I Recess mounted Signature series premium commercial luminaire Available in 3000K 4000K & 5700K



Product Description	MRP (₹)
LCTRI-36-CDL	6500
LCTRI-36-TL	6500
LCTRI-36-WW	6500



STELLUX - P

LED STELLUX-P Recess mounted Signature series premium commercial luminaire Available in 4000K & 5700K



Product Description	MRP (₹)
LCTRP-36-CDL	7400
LCTRP-36-TL	7400
LCTRP-36-WW	7400



STELLUX - S

LED STELLUX-S Recess mounted Signature series premium commercial luminaire Available in 3000K 4000K & 5700K



Product Description	MRP (₹)
LCTRS-36-CDL	8200
LCTRS-36-TL	8200
LCTRS-36-WW	8200




STELLUX - H

LED STELLUX-H Recess mounted Signature series premium commercial luminaire Available in 3000K 4000K & 5700K



Product Description	MRP (₹)
LCTRH-36-CDL	10600
LCTRH-36-TL	10600
LCTRH-36-WW	10600

INDOOR COMMERCIAL LIGHTING




POLLUX

Pollux is a exquisitely designed luminaire which is bound to deliver extra ordinary lumens through its pure form and glare-less light. Recessed full open 2X2 (>120 Lumen/Watt).

For Analog and DALI dimming options, please contact CGCEL sales team.

Product Description	MRP (₹)
LCTLRP-24-FO-CDL	6000
LCTLRP-30-FO-CDL	6500
LCTLRP-36-FO-CDL	7000




POLARIS NIO - I

LED Recessed full lit luminaire with glare free uniform illumination with longer life and less maintenance. 18W available in 1 ft x 1 ft, all other wattages in 2 ft x 2 ft (>100 Lumen/Watt)

For Analog and DALI dimming options, please contact CGCEL sales team.


Product Description	MRP (₹)
LCTLRNE-18-CDL(1X1)	2700
LCTLRNE-18-WW(1X1)	2700
LCTLRNE-18-TL(1X1)	2700
LCTLRNE-24-FO-CDL	4500
LCTLRNE-24-FO-WW	4500
LCTLRNE-24-FO-TL	4500
LCTLRNE-30-FO-CDL	4800
LCTLRNE-30-FO-WW	4800
LCTLRNE-30-FO-TL	4800
LCTLRNE-36-FO-CDL	5000
LCTLRNE-36-FO-WW	5000
LCTLRNE-36-FO-TL	5000



POLARIS NIO - II

LED Recessed full lit luminaire with glare free uniform illumination with longer life and less maintenance. Available in 2 ft x 2 ft (>100 Lumen/Watt)


Product Description	MRP (₹)
CCR-126-50-57-SL-NWH	6000
CCR-126-50-40-SL-NWH	6000
CCR-126-50-30-SL-NWH	6000



POLARIS NIO - III

LED Surface full lit luminaire with glare free uniform illumination with longer life and less maintenance. 18W available in 1 ft x 1 ft, all other wattages in 2 ft x 2 ft (>100 Lumen/Watt)

Product Description	MRP (₹)
LCTLSNE-18-F0-CDL	3000
LCTLSNE-18-F0-TL	3000
LCTLSNE-18-F0-WW	3000
LCTLSNE-24-F0-CDL	5000
LCTLSNE-24-F0-TL	5000
LCTLSNE-24-F0-WW	5000
LCTLSNE-30-F0-CDL	5500
LCTLSNE-30-F0-TL	5500
LCTLSNE-30-F0-WW	5500
LCTLSNE-36-F0-CDL	6000
LCTLSNE-36-F0-TL	6000
LCTLSNE-36-F0-WW	6000



SPAN

SPAN is recessed & surface LED 1 ft x 4 ft Panel ceiling light with high performance, commercial grade solution suitable for hospitals, schools, offices and so much more. (>100 Lumen/Watt)

Product Description	MRP (₹)
LCTLRNE-40-CDL(1X4)	6000
LCTLRNE-40-TL(1X4)	6000
LCTLRNE-40-WW(1X4)	6000
LCTLSNE-40-CDL(1X4)	6500
LCTLSNE-40-TL(1X4)	6500
LCTLSNE-40-WW(1X4)	6500




TECHZONE

Designed with simplicity and attention to detail in mind. This luminaire is perfect for 100 mm recess techzone ceiling.

Product Description	MRP (₹)
LCRTTZN-40-CDL	8200
LCRTTZN-40-WW	8200
LCRTTZN-40-TL	8200


INDOOR COMMERCIAL LIGHTING



VECTOR - I

Multi angular slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.


Product Description	MRP (₹)
LCTLRF1-36-CDL	6000
LCTLRF1-36-TL	6000
LCTLRF1-36-WW	6000



VECTOR - II

Merged octagon shaped slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.

Product Description	MRP (₹)
LCTLRF2-36-CDL	6000
LCTLRF2-36-TL	6000
LCTLRF2-36-WW	6000



VECTOR - III

Triangular shaped slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.

Product Description	MRP (₹)
LCTLRF3-36-CDL	6000
LCTLRF3-36-TL	6000
LCTLRF3-36-WW	6000




VECTOR - IV

Abstract shaped slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.

Product Description	MRP (₹)
LCTLRF4-36-CDL	6000
LCTLRF4-36-TL	6000
LCTLRF4-36-WW	6000


VECTOR - V



Abstract shaped slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.

Product Description	MRP (₹)
LCTRLF5-36-CDL	6000
LCTRLF5-36-TL	6000
LCTRLF5-36-WW	6000


VECTOR - VI



Rhombus shaped slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.

Product Description	MRP (₹)
LCTRLF6-36-CDL	6000
LCTRLF6-36-TL	6000
LCTRLF6-36-WW	6000

VECTOR - VII



Square shaped Slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.

Product Description	MRP (₹)
LCTRLF7-36-CDL	6000
LCTRLF7-36-TL	6000
LCTRLF7-36-WW	6000



INDOOR COMMERCIAL LIGHTING

NEW




STYLO - Q

It is made of PDC aluminum body with PC diffuser which provides square in circle theme. It creates illusion of ceiling merging with luminaire, as the contrast of two primary shapes create a strong form. Efficacy : 100 lm/w

Product Description	MRP (₹)
LCDRQ-09-CDL	1200
LCDRQ-09-TL	1200
LCDRQ-09-WW	1200
LCDRQ-12-CDL	1500
LCDRQ-12-TL	1500
LCDRQ-12-WW	1500
LCDRQ-15-CDL	1600
LCDRQ-15-TL	1600
LCDRQ-15-WW	1600
LCDRQ-18-CDL	2000
LCDRQ-18-TL	2000
LCDRQ-18-WW	2000

NEW



STYLO - S

Stylo - S comes with sleek injection module plastic body, integral bezelless design which provides the cleanest lines for the minimal effect, diffuser profile ends in ripples that allows light fade towards the edges. Efficacy 100LM/W

Product Description	MRP (₹)
LCDRS-09-CDL	1150
LCDRS-09-WW	1150
LCDRS-09-TL	1150
LCDRS-12-CDL	1400
LCDRS-12-WW	1400
LCDRS-12-TL	1400
LCDRS-15-CDL	1500
LCDRS-15-WW	1500
LCDRS-15-TL	1500
LCDRS-18-CDL	1950
LCDRS-18-WW	1950
LCDRS-18-TL	1950

NEW



STYLO - 0

Stylo - 0 bring forth innovative design, circle in square shape offering emboss small panel appearance with sleek aluminum PDC body.
Efficacy 100LM/W

Product Description	MRP (₹)
LCDRO-09-CDL	1150
LCDRO-09-WW	1150
LCDRO-09-TL	1150
LCDRO-12-CDL	1400
LCDRO-12-WW	1400
LCDRO-12-TL	1400
LCDRO-15-CDL	1500
LCDRO-15-WW	1500
LCDRO-15-TL	1500
LCDRO-18-CDL	1950
LCDRO-18-WW	1950
LCDRO-18-TL	1950



PROXIMA - R

Is a high performance low-height back lit downlighter suited for any modern professional workspace. Robust PDC aluminum housing ensures long life.

Available in 5700K, 4000K, 3000K CCT Efficacy 100LM/W
For Analog and DALI dimming options, please contact CGCEL sales team.

Product Description	MRP (₹)
CDR-204-06-57-SL-NWH	1200
CDR-204-06-40-SL-NWH	1200
CDR-204-06-30-SL-NWH	1200
CDR-205-12-57-SL-NWH	1600
CDR-205-12-40-SL-NWH	1600
CDR-205-12-30-SL-NWH	1600
CDR-205-15-57-SL-NWH	1800
CDR-205-15-40-SL-NWH	1800
CDR-205-15-30-SL-NWH	1800
CDR-206-18-57-SL-NWH	2600
CDR-206-18-40-SL-NWH	2600
CDR-206-18-30-SL-NWH	2600

INDOOR COMMERCIAL LIGHTING



PROXIMA - S

Proxima-S is a high performance low- height downlighter suited for any modern professional workspace. Robust PDC aluminum housing ensures long life.

Available in 5700K, 4000K, 3000K CCT Efficacy 100LM/W
For Analog and DALI dimming options, please contact CGCEL sales team.

Product Description	MRP (₹)
CDR-207-06-57-SL-NWH	1200
CDR-207-06-40-SL-NWH	1200
CDR-207-06-30-SL-NWH	1200
CDR-208-12-57-SL-NWH	1600
CDR-208-12-40-SL-NWH	1600
CDR-208-12-30-SL-NWH	1600
CDR-208-15-57-SL-NWH	1800
CDR-208-15-40-SL-NWH	1800
CDR-208-15-30-SL-NWH	1800
CDR-209-18-57-SL-NWH	2600
CDR-209-18-40-SL-NWH	2600
CDR-209-18-30-SL-NWH	2600



PROXIMA - II

Proxima-II is a high performance low-height back lit downlighter suited for any modern professional workspace. Robust PDC aluminum housing ensures long life. Available in 5700K, 4000K, 3000K CCT. Efficacy 100LM/W


Product Description	MRP (₹)
CDR-216-30-57-SL-NWH	3200
CDR-216-30-40-SL-NWH	3200
CDR-216-30-30-SL-NWH	3200
CDR-216-40-57-SL-NWH	4000
CDR-216-40-40-SL-NWH	4000
CDR-216-40-30-SL-NWH	4000



PEARL ULTIMA - R

Round recess mounted LED edge lit slim downlight with die-cast aluminum housing finished in premium white powder coating. Efficacy 100lm/w

Product Description	MRP (₹)
LSCRM-6W-CDL	850
LSCRM-6W-NW	850
LSCRM-6W-WW	850
LSCRM-12W-CDL	1100
LSCRM-12W-NW	1100
LSCRM-12W-WW	1100
LSCRM-15W-CDL	1400
LSCRM-15W-NW	1400
LSCRM-15W-WW	1400
LSCRM-18W-CDL	1600
LSCRM-18W-NW	1600
LSCRM-18W-WW	1600



PEARL ULTIMA - S

Square recess mounted LED edge lit slim downlight with die-cast aluminum housing finished in premium white powder coating. Efficacy 100lm/w

Product Description	MRP (₹)
LSCSM-6W-CDL	850
LSCSM-6W-NW	850
LSCSM-6W-WW	850
LSCSM-12W-CDL	1100
LSCSM-12W-NW	1100
LSCSM-12W-WW	1100
LSCSM-15W-CDL	1400
LSCSM-15W-NW	1400
LSCSM-15W-WW	1400
LSCSM-18W-CDL	1600
LSCSM-18W-NW	1600
LSCSM-18W-WW	1600
CCR-141-24-57-SL-NWH	2200
CCR-141-24-40-SL-NWH	2200
CCR-141-24-30-SL-NWH	2200


INDOOR COMMERCIAL LIGHTING



PEARL NIOS - R

Round surface mounted LED panel. PDC aluminum housing and high translucent frosted plastic diffuser makes it a robust Luminaire. Efficacy 100lm/w

Product Description	MRP (₹)
LCDSPLN-R-06-CDL	1000
LCDSPLN-R-06-NW	1000
LCDSPLN-R-06-WW	1000
LCDSPLN-R-12-CDL	1450
LCDSPLN-R-12-NW	1450
LCDSPLN-R-12-WW	1450
LCDSPLN-R-18-CDL	2000
LCDSPLN-R-18-NW	2000
LCDSPLN-R-18-WW	2000



PEARL NIOS - R

Square surface mounted LED panel. PDC aluminum housing and high translucent frosted plastic diffuser makes it a robust Luminaire. Efficacy 100lm/w

Product Description	MRP (₹)
LCDSPLN-S-06-CDL	1000
LCDSPLN-S-06-NW	1000
LCDSPLN-S-06-WW	1000
LCDSPLN-S-12-CDL	1450
LCDSPLN-S-12-NW	1450
LCDSPLN-S-12-WW	1450
LCDSPLN-S-18-CDL	2000
LCDSPLN-S-18-NW	2000
LCDSPLN-S-18-WW	2000



INDOOR COMMERCIAL LIGHTING



QUARTZ⁺ Round

Slim design LED recessed round polycarbonate housing down lighter with superior light output and integral driver. Efficacy 100lm/w

Product Description	MRP (₹)
LCDEP-06-CDL.	520
LCDEP-06-NW.	520
LCDEP-06-WW	520
LCDEP-09-CDL.	550
LCDEP-09-NW	550
LCDEP-09-WW	550
LCDEP-12-CDL.	850
LCDEP-12-NW	850
LCDEP-12-WW	850
LCDEP-15-CDL.	900
LCDEP-15-NW.	900
LCDEP-15-WW	900
LCDEP-18-CDL.	1280
LCDEP-18-NW.	1280
LCDEP-18-WW.	1280

QUARTZ⁺ Round Surface Ring

Surface ring for Quartz+ needs to be ordered separately

Product Description	MRP (₹)
SF-R-6	100
SF-R-12	170
SF-R-15	190
SF-R-18	220

QUARTZ⁺ Square Surface Ring

Surface ring for Quartz+ needs to be ordered separately

Product Description	MRP (₹)
SF-S-6	100
SF-S-12	170
SF-S-15	190
SF-S-18	220



QUARTZ + S

Slim design LED recessed round down lighter polycarbonate housing with superior light output and integral driver.
Efficacy 100lm/w

Product Description	MRP (₹)
LSDEP-06-CDL.	520
LSDEP-06-NW.	520
LSDEP-06-WW	520
LSDEP-09-CDL.	550
LSDEP-09-NW	550
LSDEP-09-WW	550
LSDEP-12-CDL.	850
LSDEP-12-NW	850
LSDEP-12-WW	850
LSDEP-15-CDL.	900
LSDEP-15-NW.	900
LSDEP-15-WW	900
LSDEP-18-CDL.	1280
LSDEP-18-NW.	1280
LSDEP-18-WW.	1280



INDOOR COMMERCIAL LIGHTING



ROYAL RIMLESS - R

Royal Rimless - R is a surface mounted LED panel injection molded in thermally conductive engineered plastic - FR V0 grade housing, diffuser with high optically efficient material.

Product Description	MRP (₹)
LCRP-06-CDL	550
LCRP-10-CDL	700
LCRP-15-CDL	950
LCRP-20-CDL	1400
LCRP-06-NW	550
LCRP-10-NW	700
LCRP-15-NW	950
LCRP-20-NW	1400
LCRP-06-WW	550
LCRP-10-WW	700
LCRP-15-WW	950
LCRP-20-WW	1400



ROYAL RIMLESS - S

Royal Rimless - S is a surface mounted LED panel injection molded in thermally conductive engineered plastic - FR V0 grade housing, diffuser with high optically efficient material.


Product Description	MRP (₹)
LSRP-06-CDL	550
LSRP-10-CDL	700
LSRP-15-CDL	950
LSRP-20-CDL	1400
LSRP-06-NW	550
LSRP-10-NW	700
LSRP-15-NW	950
LSRP-20-NW	1400
LSRP-06-WW	550
LSRP-10-WW	700
LSRP-15-WW	950
LSRP-20-WW	1400



BRIGHT LINEA

High-quality materials and design. Extruded aluminum housing enhances safety. High quality PC Diffuser. Reliable and robust housing structure, maximize the endurance over the life time Slim Integrated design, easy to install Efficacy : 125 lumen/watt

Product Description	MRP (₹)
CCS-100-20-65-HL2-DP-NWH	850



TRIMLINE NEU

Trimline Neu is a robust and high performance batten. This LED luminaire comprises of extruded channel in thermally conductive material. High translucent serrated milky white diffuser is used to get glare free and smooth light distribution. Efficacy : 100 lumen/watt

Product Description	MRP (₹)
CCS-103-05-65-SL-DP-NWH	410
CCS-103-05-40-SL-DP-NWH	410
CCS-103-05-30-SL-DP-NWH	410
CCS-103-10-65-SL-DP-NWH	550
CCS-103-10-40-SL-DP-NWH	550
CCS-103-10-30-SL-DP-NWH	550
CCS-103-20-65-SL-DP-NWH	800
CCS-103-20-40-SL-DP-NWH	800
CCS-103-20-30-SL-DP-NWH	800
CCS-100-40-65-SL-DP-NWH	1200
CCS-100-40-40-SL-DP-NWH	1200
CCS-100-40-30-SL-DP-NWH	1200




TRIM LINEA NEU

Trim Linea Neu is a PC batten. Compact appearance, simple and versatile in nature makes it as long lasting, efficient solution for offices and other commercial spaces. Efficacy : 100 lumen/watt

Product Description	MRP (₹)
CCS-102-10-65-SL-DP-NWH	510
CCS-102-10-40-SL-DP-NWH	510
CCS-102-10-30-SL-DP-NWH	510
CCS-102-20-65-SL-DP-NWH	620
CCS-102-20-40-SL-DP-NWH	620
CCS-102-20-30-SL-DP-NWH	620

INDOOR COMMERCIAL LIGHTING



UNILITE

Compact commercial batten suitable for single T8 LED tube.
LED tube to be ordered separately

Product Description	MRP (₹)
DMLN1LT8-8	300
DMLN1LT8-16	330

INDUSTRIAL LIGHTING





INDUSTRIAL LIGHTING



SURROUND HYPERION

Very high efficiency round highbay in PDC housing suitable for industrial application. The luminaire has efficacy upto 150Lm/W to reduce quantity/wattage thereby reducing operational cost. Ingress protection of IP66 with additional safety chain.

Product Description	MRP (₹)
CIP-320-80-57-60D-HL4-GL-NSR	20000
CIP-320-80-57-90D-HL4-GL-NSR	20000
CIP-320-100-57-60D-HL4-GL-NSR	22000
CIP-320-100-57-90D-HL4-GL-NSR	22000
CIP-320-120-57-60D-HL4-GL-NSR	24000
CIP-320-120-57-90D-HL4-GL-NSR	24000
CIP-320-140-57-60D-HL4-GL-NSR	26000
CIP-320-150-57-60D-HL4-GL-NSR	27000



SURROUND ULTRA

High efficiency round highbay in PDC housing suitable for industrial application. The luminaire has efficacy upto 130Lm/W to reduce quantity/wattage thereby reducing operational cost. Ingress protection of IP66 with additional safety chain.

Product Description	MRP (₹)
LHB11-80-CDL/60-HPM	16000
LHB11-100-CDL/60-HPM	18000
LHB11-120-CDL/60-HPM	20000
LHB11-140-CDL/60-HPM	22000
LHB11-150-CDL/60-HPM	23000




SURROUND NEO

High efficiency round highbay in PDC housing suitable for industrial application. The luminaire has efficacy of 110lm/w reduce quantity /wattage thereby reducing operational cost. Ingress protection of IP66 with additional safety chain.

Product Description	MRP (₹)
LHB11-80-CDL/60-M	12500
LHB11-100-CDL/60-M	13500
LHB11-120-CDL/60-M	14500
LHB11-140-CDL/60-M	17000
LHB11-150-CDL/60-M	18000

NEW




PARABOLA ULTRA

Uniquely designed circular highbay with IP lens for better lighting distribution. Available in lumens >120 Lumens/W, >130 Lumens/W and >140 Lumens/W making it a versatile solution for various industrial application. Ingress protection of IP66 with additional safety chain.

Product Description	MRP (₹)
CIP-326-180-57-60D-HL2-LM-NSG	27000
CIP-326-200-57-60D-HL2-LM-NSG	28000
CIP-326-180-57-60D-HL3-LM-NSG	29000
CIP-326-200-57-60D-HL3-LM-NSG	30000
CIP-326-180-57-60D-HL4-LM-NSG	31000
CIP-326-200-57-60D-HL4-LM-NSG	32000

NEW



PARABOLA NEO

Uniquely designed circular highbay with toughened glass. Available in lumens >110 Lumens/W with 10kv SPD as standard making it a robust solution for various industrial application. Ingress protection of IP66 with additional safety chain.

Product Description	MRP (₹)
CIP-325-180-57-60D-SL-GL-NSG	28000
CIP-325-200-57-60D-SL-GL-NSG	29000

NEW



SURROUND SENSORIUM

Surround sensorium highbay comes with a microwave sensor for effective energy savings in industries. The sensor gives signal to the luminaire to switch on/off/dim as soon as motion is detected with a sensor detection range of 10 meters.

Product Description	MRP (₹)
CIP-330-80-57-60D-SL-MWS-GL-A-SG	25000
CIP-320-100-57-60D-SL-MWS-GL-A-SG	27000
CIP-320-120-57-60D-SL-MWS-GL-A-SG	29000
CIP-320-140-57-60D-SL-MWS-GL-A-SG	31000
CIP-320-150-57-60D-SL-MWS-GL-A-SG	33000

INDUSTRIAL LIGHTING

NEW



SURROUND NEO (T)

Eco round highbay in PDC housing suitable for industrial application. The luminaire has efficacy of 110lm/w which reduces quantity/wattage thereby reducing operational cost. Ingress protection of IP66 with additional safety chain.

Product Description	MRP (₹)
TIP-320-80-57-SL-GL-NSG	12000
TIP-320-100-57-SL-GL-NSG	13500
TIP-320-120-57-SL-GL-NSG	14500
TIP-320-150-57-SL-GL-NSG	18000



JUPITER NEO

Highbay with innovative designed heat sink for superior thermal management making it a perfect solution for industrial application. The Luminaire has an efficacy of 110 Lumens/W. Ingress protection of IP66.

Product Description	MRP (₹)
LHB-80-CDL/60-M	13800
LHB-100-CDL/60-M	15500
LHB-120-CDL/60-M	17000
LHB-140-CDL/60-M	18500
LHBN-150-CDL/60-M	19000
LHB11-180-CDL/60-M	21000
LHB11-200-CDL/60-M	22500

NEW



PHOTON ULTRA PLUS - 140 Lumens/W

High efficacy wellglass which consumes lesser energy and maintains high lighting levels. Luminaire efficacy of 140Lm/Watt to reduce quantity/wattage thereby reducing operational cost. Ingress protection of IP66. Available in Clear PC.

Product Description	MRP (₹)
CIP-311-25-57-HL4-CP-NSG	5300
CIP-311-30-57-HL4-CP-NSG	5400
CIP-311-35-57-HL4-CP-NSG	5500
CIP-311-40-57-HL4-CP-NSG	5600

NEW



PHOTON

Wellglass with advanced designed vertical fins which aides in zero dust accumulation making it a suitable solution for multiple industries. The Luminaire has an efficacy of 110 Lumens/W Ingress protection of IP66.

Product Description	MRP (₹)
CIP-311-30-57-SL-CP-NSG	3800
CIP-311-30-30-SL-CP-NSG	3800
CIP-311-35-57-SL-CP-NSG	4000
CIP-311-35-30-SL-CP-NSG	4000
CIP-311-40-57-SL-CP-NSG	4200
CIP-311-40-30-SL-CP-NSG	4200

NEW



PHOTON ULTRA - 120 Lumens/W

Wellglass with IP lens ensuring superior lighting levels making it an ideal solution for low bay applications. Luminaire efficacy > 120 Lumens/W. Ingress protection of IP66.

Product Description	MRP (₹)
CIP-311-25-57-HL2-LM-NSG	5000
CIP-311-30-57-HL2-LM-NSG	5100
CIP-311-35-57-HL2-LM-NSG	5200
CIP-311-40-57-HL2-LM-NSG	5300



SUPRA NEO-II

Highly reliable wellglass with superior technology which consumes lesser energy with high lighting levels. Superior tapered fin design with exceptional thermal management. Ingress protection of IP66.

Product Description	MRP (₹)
LWV12-70-(CDL)	8200
LWV12-70-(WW)	8200

INDUSTRIAL LIGHTING

NEW



SUPRA NEO-II (T)

Eco Wellglass in PDC housing with a luminaire efficacy of 110 Lm/W. It consumes lesser energy and gives high lighting level. Superior tapered fin design with exceptional thermal management. Ingress protection of IP66.

Product Description	MRP (₹)
TIP-311-70-57-SL-CP-NSG	8000



NEPTUNE NEO-II

PDC Aluminium constructed recessed mounted under canopy luminaire with superior aesthetic finish and high reliability making it an ideal solution for petrol pumps. Ingress protection of IP66. Available in 600mmX 600mm frame

Product Description	MRP (₹)
LCNP-80-CDL/60-M	10500
LCNP-80-CDL/60-M(600)	12500
LCNP-100-CDL/60-M	12000
LCNP-100-CDL/60-M(2x2)	14500



NEPTUNE ULTRA-II

High efficacy under canopy which consumes lesser energy and maintains high lighting levels. Luminaire efficacy of 125Lm/Watt to reduce quantity/wattage thereby reducing operational cost. Ingress protection of IP66. Available in 600x 600 frame

Product Description	MRP (₹)
LCNP-80-CD60HPM	13000
LCNP-80-CD60HPM600	16000



SUNRISE

Pressure Die Cast Al housing bulkhead for multiple application. IP65 protected

Product Description	MRP (₹)
LBHE-10-CDL	2200



STUD

Compact modern Design utility bulkhead with high energy savings

Product Description

LBHP-10-CDL

MRP (₹)

1350



INDUSTRIAL BATTEN & LED TUBES





INDUSTRIAL BATTEN & LED TUBES



SHIELD NEO

Weatherproof integrated LED Batten suitable for various industrial application in 4 ft for wattages of 40W & 20W. Ingress protection of IP65.


Product Description	MRP (₹)
CIS-300-40-57-SL-DP-NGR	4800
CIS-300-20-57-SL-DP-NGR	4400



SHIELD

Surface/Suspended waterproof industrial luminaire with polycarbonate housing and diffuser suitable for single and twin 4 ft T8 tube. Ingress protection of IP66.


Product Description	MRP (₹)
IPFC121LT8	2000
IPFC122LT8	2300



SHELTER

High Performance integrated LED Batten to create a sustainable lighting environment with surface/suspended mounting

Product Description	MRP (₹)
CIS-305-40-57-SL-DP-NWH	2800



SHELTER ULTRA

High efficacy integrated LED Batten to create a sustainable lighting environment with surface/suspended mounting with efficacy of 120 Lm/Watt


Product Description	MRP (₹)
CIS-305-40-57-HL2-DP-NWH	3500



ECO

Compact industrial batten suitable for single T8 LED tube


Product Description	MRP (₹)
DIJB12LT8-20	400

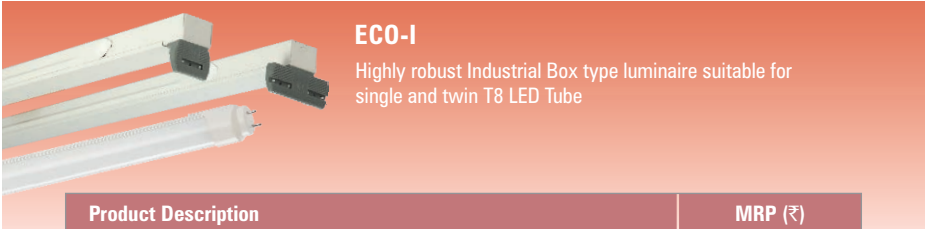

ECO-I

Highly robust Industrial Box type luminaire suitable for single and twin T8 LED Tube

Product Description	MRP (₹)
IGP161LT8-16	600
IGP162LT8-16	650

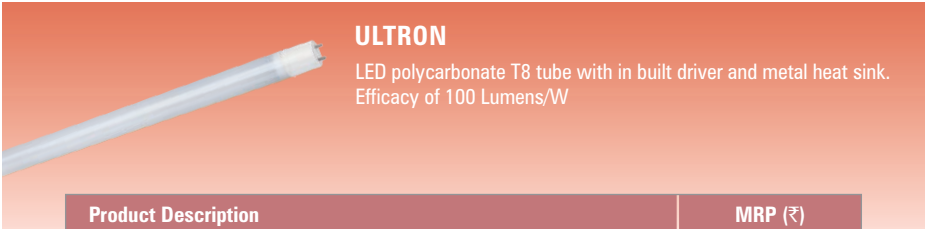

ULTRON

LED polycarbonate T8 tube with in built driver and metal heat sink. Efficacy of 100 Lumens/W

Product Description	MRP (₹)
LT8-20-865-(2)	700



ULTRON PLUS

High Efficacy LED tube with in built driver and superior lumens in lower wattages. 18W with 2100 Lumens & 13W 1600 Lumens

Product Description	MRP (₹)
LT8-13-865-(3)	850
LT8-18-865-(3)	950


INDUSTRIAL BATTEN & LED TUBES



CRYSTA

LED Glass T8 tube with in built driver and efficacy of 100 lumens/W

Product Description	MRP (₹)
LGT8-16-865-2	500
LGT8-20-865-2	550

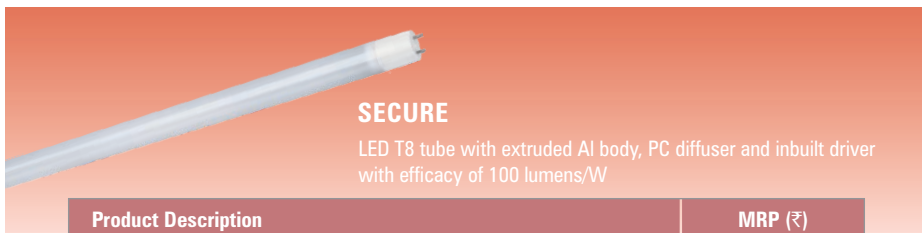

SECURE

LED T8 tube with extruded Al body, PC diffuser and inbuilt driver with efficacy of 100 lumens/W

Product Description	MRP (₹)
LTT8-8	750
LTT8-16	800
LTT8-20	850





CLEANROOM LIGHTING





CLEANROOM LIGHTING



CLEANLUX I

Recessed mounted bottom opening LED Cleanroom luminaire (2X2). CRCA powder coated housing. SS Frame available on request. LCBOR-24-CDL is (1x1)

Product Description	MRP (₹)
LCBOR-24-CDL	6800
LCBOR-40-CDL	10900
LCBOR-50-CDL	13000
LCBOR-60-CDL	13600



CLEANLUX II

Recessed mounted bottom opening LED Cleanroom luminaire (1X4). CRCA powder coated housing. SS Frame available on request.

Product Description	MRP (₹)
LCBOR-40-CDL(1X4)	12000
LCBOR-50-CDL(1X4)	14100
LCBOR-60-CDL(1X4)	19600



CLEANLUX III

Recessed mounted bottom opening LED Cleanroom luminaire (1X2). CRCA powder coated housing. SS Frame available on request.

Product Description	MRP (₹)
LCBOR-40-CDL(1X2)	8400



CLEANLUX IV

Recessed mounted top opening LED Cleanroom luminaire (2X2). CRCA powder coated housing. SS frame available on request. LCTOR-24-CDL is (1X1).

Product Description	MRP (₹)
LCTOR-24-CDL	9400
LCTOR-40-CDL	13500
LCTOR-50-CDL	15700
LCTOR-60-CDL	16800




FLAMEPROOF LIGHTING






FLAMERPROOF LIGHTING



FIAMMA I

CIMFR certified LED flameproof batten suitable for single and twin T8 tube of 8W. Recommended for Gas/Vapor group of IIA & IIB and Zone 1 & 2. IP65 Protected.
LED tubes to be ordered separately

Product Description	MRP (₹)
EXTN2LT8-8	12000



FIAMMA II

CIMFR certified LED flameproof batten suitable for single and twin T8 tube of 16W/20W. Recommended for Gas/Vapor group of IIA & IIB and Zone 1 & 2. IP65 Protected.
LED tubes to be ordered separately

Product Description	MRP (₹)
EXTN1LT8-16/20	12600
EXTN2LT8-16/20	13600



GLAZE PRO

CIMFR certified LED flameproof wellglass in die cast Al housing with heat resistant toughened glass. Recommended for Gas/Vapor group of IIA & IIB and Zone 1 & 2. IP65 protected.

Product Description	MRP (₹)
FWL1315-30-CDL	12600
FWL1315-40-CDL	14700
FWL1315-60-CDL	15800



STREET LIGHTING





STREET LIGHTING

NEW



TURBO

TURBO street lights are made up of pressure die cast housing with integrated lenses and high power LED's with IP66 protection. Efficacy \geq 100LPW

Product Description	MRP (₹)
TRP-400-15-57-SL-LM-NSR	2100
TRP-400-18-57-SL-LM-NSR	2100
TRP-400-20-57-SL-LM-NSR	2100
TRP-400-25-57-SL-LM-NSR	2200
TRP-400-30-57-SL-LM-NSR	2900
TRP-400-35-57-SL-LM-NSR	4000

NEW



RAPTOR NEO - I

RAPTOR NEO street lights are aerodynamically designed for all weather conditions with excellent thermal management, made with pressure die cast housing with toughened glass and high power LED's with secondary optics and IP66 protection. Efficacy \geq 110LPW 10KV SPD Included (60/70SL)

Product Description	MRP (₹)
TRP-409-45-57-SL-NS-GL-NSG	5800
TRP-409-60-57-SL-GL-NSG	6400
TRP-409-70-57-SL-GL-NSG	7000

NEW



RAPTOR NEO - II

RAPTOR NEO street lights are aerodynamically designed for all weather conditions with excellent thermal management, made with pressure die cast housing with toughened glass and high power LED's with secondary optics and IP66 protection. Efficacy \geq 110LPW 10KV SPD Included


Product Description	MRP (₹)
TRP-411-90-57-SL-GL-NSG	9200
TRP-411-100-57-SL-GL-NSG	10000
TRP-411-120-57-SL-GL-NSG	14000



ASTRA NEO

ASTRA NEO street lights are made up of pressure die cast housing with toughened glass and high power LED's with secondary optics and IP66 protection. Efficacy \geq 110LPW

Product Description	MRP (₹)
LSTS-20-CDL-M	2200
LSTS-20-CDL/NL-M	2100
LSTS-25-CDL-M	2300
LSTS-25-CDL/NL-M	2200
LSTS-30-CDL-M	3100
LSTS-30-CDL/NL-M	3000



FREEDOM NEO

FREEDOM NEO LED streetlight made up of pressure die cast housing with toughened glass and high power LEDs with secondary optics with IP65 protection. External SPD can be ordered separately. Efficacy \geq 110LPW

Product Description	MRP (₹)
LSTS-36-CDL-M	5250
LSTS-40-CDL-M	5450
LSTS-45-CDL-M	5800

NEW



RAPTOR PRO - I

RAPTOR PRO street lights are aerodynamically designed for all weather conditions with excellent thermal management, made up of pressure die cast housing with toughened glass and high power LED's with secondary optics and IP66 protection. Efficacy \geq 110/125/135LPW, 10KV SPD Included

Product Description	MRP (₹)
CRP-409-45-57-SL-GL-NSG	6000
CRP-409-45-57-SL-LM-NSR	6000
CRP-409-45-57-HL2-GL-NSR	On Request
CRP-409-45-57-HL3-GL-NSR	On Request
CRP-409-60-57-SL-GL-NSG	6800
CRP-409-70-57-SL-GL-NSG	7400
CRP-409-60-57-HL2-GL-NSR	On Request
CRP-409-70-57-HL2-GL-NSR	On Request

STREET LIGHTING



ORION NEO

Orion Neo LED streetlight made up of pressure die cast aluminium housing with polycarbonate cover and high power LEDs and secondary lenses with IP66 protection. 10KV SPD included. Efficacy \geq 110LPW

Product Description	MRP (₹)
LST-60-CDL-M	6500
LST-70-CDL-M	7500



NEXUS NEO

NEXUS NEO LED streetlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 Protection. 10KV SPD included. Efficacy \geq 110/125LPW

Product Description	MRP (₹)
CRP-404-90-57-SL-GL-NSG	10400
CRP-404-90-30-SL-GL-NSG	10600
LSTP-90-CDL-HPM	12000



NEXUS STAR NEO

NEXUST STAR NEO LED streetlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. 10KV SPD included. Efficacy \geq 110/125LPW

Product Description	MRP (₹)
LSTP-100-CDL-M	11450
LSTP-100-CDL-HPM	12500
LSTP-120-CDL-M	14600
LSTP-120-WW-M	14800
LSTP-120-CDL-HPM	15500
LSTP-150-CDL-M	16600
LSTP-150-WW-M	16900

NEW



RAPTOR PRO - II

Street lights are aerodynamically designed for all weather conditions with excellent thermal management, made up of pressure die cast housing with toughened glass and high power LED's with secondary optics and IP66 protection. Efficacy \geq 110/125/135LPW, 10KV SPD Included

Product Description	MRP (₹)
CRP-411-90-57-SL-GL-NSG	9500
CRP-411-90-57-SL-LM-NSR	9500
CRP-411-90-57-HL2-GL-NSR	On Request
CRP-411-90-57-HL3-GL-NSR	On Request
CRP-411-120-57-SL-GL-NSG	14500
CRP-411-120-57-HL2-GL-NSR	16500
CRP-411-120-57-HL3-GL-NSR	17500

NEW




FALCON PRO - I

FALCON PRO street lights are aerodynamically designed with built-in tilting arrangement and excellent thermal management, made from pressure die cast housing with toughened glass, high power LED's with secondary optics, IP66 protection. Efficacy \geq 110/125/135LPW, 10KV SPD Included

Product Description	MRP (₹)
CRP-413-150-57-SL-GL-NSG	16000
CRP-413-150-57-SL-GL-HR-NGG	18000
CRP-413-150-57-HL2-GL-HR-NGG	18500
CRP-413-150-57-HL3-GL-HR-NGG	23400
CRP-413-180-57-SL-GL-HR-NGG	20000
CRP-413-180-57-HL2-GL-HR-NGG	22000
CRP-413-180-57-HL3-GL-HR-NGG	On Request

NEW



FALCON PRO - II

FALCON PRO street lights are aerodynamically designed with built-in tilting arrangement and excellent thermal management, made from pressure die cast housing with toughened glass, high power LED's with secondary optics, IP66 protection. Efficacy \geq 110/125/135LPW, 10KV SPD Included

Product Description	MRP (₹)
CRP-410-200-57-SL-GL-HR-NGG	24500
CRP-410-200-57-HL2-GL-HR-NGG	26500
CRP-410-200-57-HL3-GL-HR-NGG	31500
CRP-410-220-57-SL-GL-HR-NGG	25500
CRP-410-220-57-HL2-GL-HR-NGG	27250
CRP-410-220-57-HL3-GL-HR-NGG	32500
CRP-410-250-57-SL-GL-HR-NGG	27000
CRP-410-250-57-HL3-GL-HR-NGG	38000
CRP-410-250-57-HL2-GL-HR-NGG	28800

STREET LIGHTING





FLOOD LIGHTING



Crompton



FLOOD LIGHTING

NEW



ROVER PRO

LED floodlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. System efficacy ≥ 110 LPW
10KV SPD to be ordered separately.

Product Description	MRP (₹)
CFS-504-50-57-60D-SL-GL-NSG	5000
CFS-504-50-57-60D-SL-GL-NSG	4900
CFS-504-50-57-NL-SL-GL-NSG	4800
CFS-504-50-30-60D-SL-GL-NSG	5100



PROFILE + NEO

LED floodlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. System efficacy $\geq 110/125$ LPW
10KV SPD included.

Product Description	MRP (₹)
LFL-70-CDL/60-M	9100
LFL-80-CDL/60-M	9300
LFL-80-CDL/60-HPM	10300

NEW



ROVER PRO

LED floodlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. System efficacy ≥ 110 LPW
10KV SPD to be ordered separately.

Product Description	MRP (₹)
CFS-504-100-57-60D-SL-GL-NSG	8800
CFS-504-100-57-60D-SL-GL-NSG	9200
CFS-504-100-57-NL-SL-GL-NSG	8650
CFS-504-100-30-60D-SL-GL-NSG	9100
TFS-504-120-57-60D-SL-GL-NSG	11500
TFS-504-120-57-NL-SL-GL-NSG	11000
CFS-504-120-57-60D-SL-GL-NSG	12500
CFS-504-120-57-60D-SL-GL-NBK	On request


NEW



PLUTO PRO

LED floodlight made up of pressure die cast aluminum housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. System efficacy \geq 110 LPW
10KV SPD included.

Product Description	MRP (₹)
CFS-501-150-57-60D-SL-GL-NGG	15500
CFS-501-150-30-60D-SL-GL-NGG	15800
CFS-501-200-57-60D-SL-GL-NGG	21000
CFS-501-200-30-60D-SL-GL-NGG	21500



PLUTO NEO

LED floodlight made up of pressure die cast aluminum housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. System efficacy \geq 110/125LPW
10KV SPD included.

Product Description	MRP (₹)
LFLN-120-CDL/60-M	13400
LFLN-120-WW/60-M	13600
LFLN-135-CDL/60-M	14000
LFLN-135-WW/60-M	14200
LFLN-150-CDL/60-M	15700
LFLN-150-WW/60-M	15900
LFLN-150-CDL/60-HPM	16200
LFLN-180-CDL/60-M	20200
LFLN-200-CDL/60-M	21200
LFLN-200-WW/60-M	22500
LFLN-200-CDL/60-HPM	23000

FLOOD LIGHTING


NEW



PLUTO PRO PLUS

LED floodlight made up of pressure die cast aluminum housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. Available in MB/WB angles. System efficacy \geq 110/125/135 LPW. 10KV SPD included.

Product Description	MRP (₹)
CFS-501-300-57-60D-SL-GL-NGG	32000
CFS-501-300-30-60D-SL-GL-NGG	34500
CFS-501-300-57-30D-SL-GL-NGG	32500
CFS-501-300-30-30D-SL-GL-NGG	34500
CFS-501-300-57-60D-SL-GL-NBK	37500
CFS-501-300-57-30D-SL-GL-NBK	37500
CFS-501-300-57-60D-HL2-GL-NBK	39000
CFS-501-300-57-30D-HL2-GL-NBK	40000
CFS-501-300-57-60D-HL3-GL-NBK	48000
CFS-501-300-57-30D-HL3-GL-NBK	48500
CFS-501-350-57-60D-SL-GL-NGG	38000
CFS-501-350-30-60D-SL-GL-NGG	39000
CFS-501-350-57-30D-SL-GL-NGG	39000
CFS-501-350-30-30D-SL-GL-NGG	40000
CFS-501-350-57-60D-SL-GL-NBK	42000
CFS-501-350-57-30D-SL-GL-NBK	42500
CFS-501-350-57-60D-HL2-GL-NBK	43500
CFS-501-350-57-30D-HL2-GL-NBK	44000
CFS-501-350-57-60D-HL3-GL-NBK	54500
CFS-501-350-57-30D-HL3-GL-NBK	55000

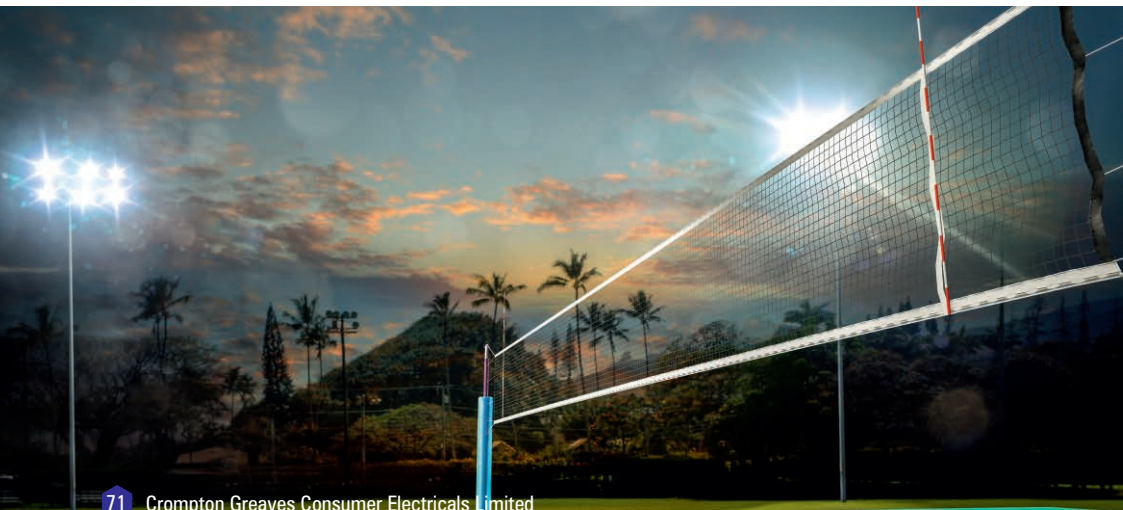

NEW




CHALLENGER PRO

LED floodlight made up of pressure die cast aluminum housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. Available in NB/MB/WB angles. System efficacy \geq 110/125/135 LPW. 10KV SPD included.

Product Description	MRP (₹)
CFS-506-250-57-60D-SL-GL-NSG	29000
CFS-506-250-57-30D-SL-GL-NSG	30000
CFS-506-250-57-60D-SL-GL-NBR	29500
CFS-506-250-57-60D-HL2-GL-NBR	32000
CFS-506-250-57-60D-HL3-GL-NBR	38000
CFS-506-250-57-30D-HL2-GL-NBR	33500
CFS-506-250-57-30D-HL3-GL-NBR	40000
CFS-506-250-57-10D-HL2-GL-NBR	39000
CFS-506-250-57-10D-HL3-GL-NBR	46000

NEW




CHALLENGER PRO PLUS

Unique modular LED floodlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. Available in NB/MB/WB angles. System efficacy \geq 110/125/135 LPW. 10KV SPD included.

Product Description	MRP (₹)
CFS-506-400-57-60D-SL-GL-NSG	48000
CFS-506-400-57-60D-SL-GL-NBR	53500
CFS-506-400-57-60D-HL2-GL-NBR	55000
CFS-506-400-57-60D-HL3-GL-NBR	70000
CFS-506-400-57-30D-SL-GL-NBR	63000
CFS-506-400-57-30D-HL2-GL-NBR	55000
CFS-506-400-57-30D-HL3-GL-NBR	71000
CFS-506-500-57-60D-SL-GL-NSG	55000
CFS-506-500-57-60D-SL-GL-NBR	59000
CFS-506-500-57-60D-HL2-GL-NBR	61000
CFS-506-500-57-60D-HL3-GL-NBR	76000
CFS-506-500-57-30D-SL-GL-NBR	59000
CFS-506-500-57-30D-HL2-GL-NBR	61000
CFS-506-500-57-30D-HL3-GL-NBR	76000
CFS-506-500-57-10D-HL2-GL-NBR	77500
CFS-506-500-57-10D-HL3-GL-NBR	92000

FLOOD LIGHTING




MAGPIE NEO

Unique modular LED floodlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. System efficacy ≥ 110 LPW. 10KV SPD included.

Product Description	MRP (₹)
LFLPI-250-CDL/60-M	33200
LFLPI-250-WW/60-M	33400
LFLPI-250-CDL/30-M	33450
LFLPI-250-WW/30-M	33500
LFLPI-400-CDL/60-M	49900
LFLPI-400-WW/60-M	52000
LFLPI-400-CDL/60-HPM	53500
LFLPI-400-WW/60-HPM	54500
LFLPI-400-CDL/30-M	49900
LFLPI-500-CDL/60-M	62000
LFLPI-500-WW/60-M	63000
LFLPI-500-CDL/30-M	62500
LFLPI-500-WW/30-M	63500

NEW



MAGPIE NEO

Unique modular LED floodlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. System efficacy $\geq 100/125/135$ LPW. 10KV SPD included.

Product Description	MRP (₹)
CFS-502-960-57-10D-SL-GL-NSR	149000
CFS-502-960-57-30D-SL-GL-NSR	125000
CFS-502-960-57-60D-SL-GL-NSR	120000
CFS-502-960-57-10D-HL2-GL-NSR	152500
CFS-502-960-57-30D-HL2-GL-NSR	130000
CFS-502-960-57-60D-HL2-GL-NSR	125000
CFS-502-960-57-10D-HL4-GL-NSR	180000
CFS-502-960-57-30D-HL4-GL-NSR	153500
CFS-502-960-57-60D-HL4-GL-NSR	152000



LANDSCAPE LIGHTING





LANDSCAPE LIGHTING



MAPLE

Decorative Post top for 360° indirect light with IP 65 protection. Resistant to impact and corrosion. Glare-free and better uniformity.

Product Description	MRP (₹)
LPTO-40-CDL	13000
LPTO-40-WW	14000
LPTO-40-CDL-M	12000
LPTO-60-CDL	17500
LPTO-60-WW	18500
LPTO-60-CDL-M	16500



NEBULA

IP65 Rated LED Post Top with moonlight effect and efficient light distribution. Also available with integrated decorative pole on request.

Product Description	MRP (₹)
LPTM-40-CDL	10000



HERITAGE

IP65 Rated LED Post Top ideal to light up parks, gardens and heritage sites.

Product Description	MRP (₹)
LPTH-20-CDL	7500
LPTH-20-WW	7500



TERRAIN

TERRAIN Post Top Lantern is a weather proof indirect lighting solution which improves horizontal uniformity, with reduced glare and improved lighting control.

Product Description	MRP (₹)
LPTC-40-CDL	11000



EMPIRE

IP65 Rated Decorative Street Light for gardens, pathways, Heritage sites and other City Beautification Applications.

Product Description	MRP (₹)
LPTE-60-CDL	24500
LPTE-60-WW	26000
LPTE-120-CDL	28500
LPTE-120-WW	30000



TWISTER

IP65 Rated LED Bollard with robust design and efficient light distribution.


Product Description	MRP (₹)
LBLTW-10-CDL	5200
LBLTW-10-WW	5400



SYRUS

IP65 Rated LED Bollard with robust design and efficient light distribution.

Product Description	MRP (₹)
LBLSR-10-CDL	4600
LBLSR-10-WW	4800



LIARA

IP65 rated Inverted Pyramid Tripod type LED Bollard with soft 360° light distribution.

Product Description	MRP (₹)
LBLSN-10-CDL	8000

LANDSCAPE LIGHTING



MAYA I

Pressure die cast powder coated housing with PC diffuser. Efficient high output LED with IP65 protection.

Product Description	MRP (₹)
LBLA1-10-CDL	4000



MAYA II

Pressure die cast powder coated housing with PC diffuser. Efficient high output LED with IP65 protection.


Product Description	MRP (₹)
LBLA2-10-CDL	4200



MAYA III

Pressure die cast powder coated housing with PC diffuser. Efficient high output LED with IP65 protection.

Product Description	MRP (₹)
LBLA3-10-CDL	4500



BEACON

IP65 Rated LED Step Light for Outdoor Applications.

Product Description	MRP (₹)
LSL-6-CDL	2400
LSL-6-WW	2600



TWILIGHT

LED outdoor UP-DOWN light with IP65 protection
Available with 3000K & 5700K

Product Description	MRP (₹)
LUPDN-10-CDL	3600
LUPDN-10-WW	3800



SOLAR LIGHTING





SOLAR LIGHTING



SOLAR ALL IN ONE

Crompton Solar All in One : comprising of high efficacy LEDs (120 lm/w), efficient Monocrystalline Solar panel, new age Lithium Ferro phosphate battery, silicon encapsulated high efficiency MPPT Charge controller, uniquely designed Aluminum housing for better heat dissipation & strategically placed perforations allowing natural air passive circulation within & into the housing for improved thermal management of internal components, including mounting bracket, in-built PIR Motion sensor*

Product Description	Wattage	LFP** Battery	Solar Panel	MRP (₹)***
CSADSMP09CDL-NC	9W	12.8V/12Ah	30 Wp Monocrystalline	46,000
CSADSMP12CDL-NC	12W	12.8V/12Ah	30 Wp Monocrystalline	51,700
CSADSMP15CDL-NC	15W	12.8V/18Ah	30 Wp Monocrystalline	57,500
CSADSMP20CDL-NC	20W	12.8V/24Ah	40 Wp Monocrystalline	64,400
CSADSMP25CDL-NC	25W	12.8V/30Ah	45 Wp Monocrystalline	71,300
CSADSMP30CDL-NC	30W	12.8V/36Ah	60 Wp Monocrystalline	80,500
CSADSMP40CDL-NC	40W	12.8V/42Ah	80 Wp Monocrystalline	100,000

* PIR Motion sensor : system starts at 30% brightness, glows to 100% for 30 seconds upon motion detection

** LFP : Lithium Ferro phosphate,

*** Excludes Poles cost, installation cost, installation accessories (if any)

Variants available in AIO (upon request)

Efficacy range 140 lm/W, >170 lm/W (select wattage only)

Non-PIR based configuration

CCT : Warmwhite (select wattage only)

Hybrid : AC-DC (select wattage only)

Higher wattage : 50W/60W

Other Products (upon request)

Standalone Street light with Lead Acid battery

Standalone Street light with LFP battery

Solar Home light system : 50Wp



12W White LED based Solar Street light
(as per MNRE specifications)

Price available upon request



All-In-One SOLAR STREET LIGHTS



EASY INSTALLATION



EASY MAINTENANCE



LONG LIFE

Please note :

Solar solutions require bright & adequate sunlight for charging
Please check installation site for any shade/building/tree that block
sunlight insolation on solar panel

Do not install Solar lights under/adjacent to any other bright light source
Solar Panel should face south for capturing adequate sunlight & should be
cleaned periodically to remove accumulated dust
Follow CGCEL product manual & guidelines of proper installation

Contact Crompton Sales team
for more details regarding Solar lights

HIGH MAST & POLES






HIGH MAST & POLES

BASIC WIND SPEED IN m/s


(Based on past 50 years record available)

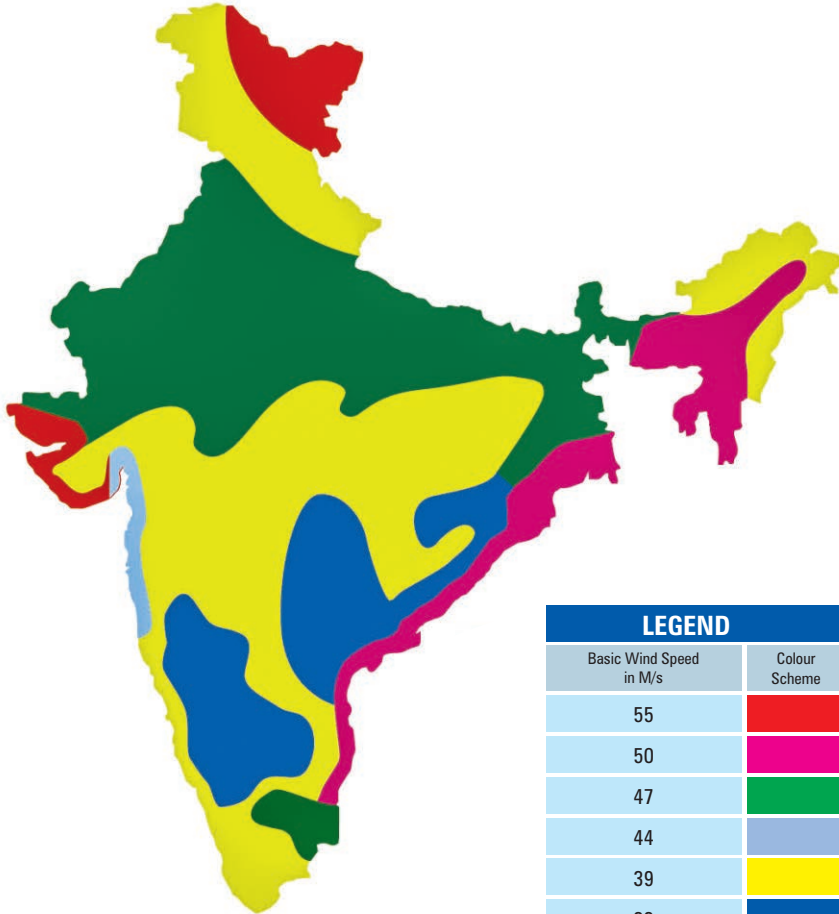

BASIC WIND SPEED

India is a vast country with diverse climatic conditions. Wind speed at various locations change as per conditions. Based on past 50 years record of basic wind speed. We provide high mast structure that sustains the basic wind speed of the location and head loads.

TYPICAL BASE COMPARTMENT OF A HIGH MAST

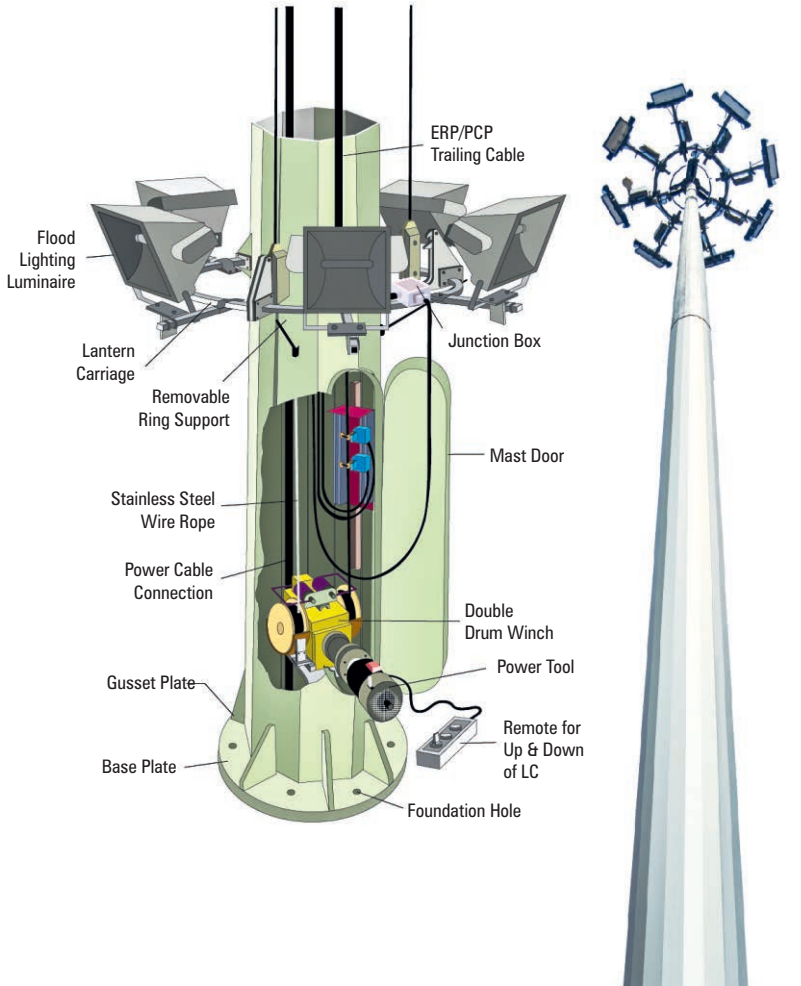

HIGH MAST & POLES

HIGH MAST

High Mast lighting as a concept in area lighting is being preferred over conventional lighting especially where large areas are to be illuminated without the need for numerous lighting columns. High Mast lighting is ideal for industrial and commercial areas, docks, airports, stations, car parks and hazardous areas.

Height of Mast	12.5 Mtr	16 Mtr	20 Mtr	25 Mtr	30 Mtr
Cat ref	HM-12.5B-LM-ACC	HM-16A-LM-ACC	HM-20A-LM-ACC	HM-25A-LM-ACC	HM-30B-LM-ACC
Material of Construction	BSEN 10025	BSEN 10025	BSEN 10025	BSEN 10025	BSEN 10025
Sectional Thickness	Top : 3 mm Bottom : 3 mm	Top : 3 mm Bottom : 4 mm	Top : 3 mm Bottom : 4 mm	Top : 3 mm Middle: 4 mm Bottom: 5 mm	Top : 4 mm Middle: 4 mm Bottom: 5 mm
Bottom (A/F)	360 mm	360 mm	410 mm	460 mm	600 mm
Top (A/F)	150 mm	150 mm	150 mm	150 mm	150 mm
Lantern Carriage					
Luminaries	6 Nos	9 Nos	12 Nos	12 Nos	12 Nos
Orientation	Symmetrical	Symmetrical	Symmetrical	Symmetrical	Symmetrical
Number of arms	6 Arms	9 Arms	6 Arms	6 Arms	6 Arms
Dynamic Loading					
Wind speed	180 kmph	180 kmph	180 kmph	180 kmph	180 kmph
Type	Double Drum	Double Drum	Double Drum	Double Drum	Double Drum
Stainless Steel Wire Rope					
Grade	AISI 316	AISI 316	AISI 316	AISI 316	AISI 316
Construction	7 /19	7 /19	7 /19	7 /19	7 /19
Number of ropes	2 Wire Rope System	2 For Winch 3 for Lantern Carriage	2 For Winch 3 for Lantern Carriage	2 For Winch 3 for Lantern Carriage	2 For Winch 3 for Lantern Carriage
Diameter	6 mm	6 mm	6 mm	6 mm	6 mm
Breaking Load capacity	2350 kg	2350 kg	2350 kg	2350 kg	2350 kg
Trailing Cable					
Conductor	5 Core 2.5 Sq mm	5 Core 2.5 Sq mm	5 Core 2.5 Sq mm	5 Core 2.5 Sq mm	5 Core 2.5 Sq mm
Insulation	Flexible	Flexible	Flexible	Flexible	Flexible
No. of circuits per mast	One	One	One	One	One
Power Tool					
Input Supply	415 V	415 V	415 V	415 V	415 V
Method of operation	Integral Motor	Integral Motor	Integral Motor	Integral Motor	Integral Motor

- Note:** 1. For wind speed other than 180 kmph; the High mast can be designed on request
2. The above mast are considered for Symmetrical orientation however Asymmetrical can also be provided on request.

OCTAGONAL POLES

Octagonal Poles are available from 3 mtrs to 12 mtrs height. Street light poles can have single arm as well as double arm brackets. Poles are hot dip galvanized.

Height Of Poles	5 Mtr	7 Mtr	9 Mtr	10 Mtr	11 Mtr	12 Mtr
Cat ref	HM-1105P	HM-1107P	HM-1109P	HM-1110P	HM-1111P	HM-1112P
Material of	BSEN 10025	BSEN 10025	BSEN 10025	BSEN 10025	BSEN 10025	BSEN 10025
Metal Protection Treatment	Hot Dip Galvanized	Hot Dip Galvanized	Hot Dip Galvanized	Hot Dip Galvanized	Hot Dip Galvanized	Hot Dip Galvanized
Thickness of Galvanization	65 microns	65 microns	65 microns	65 microns	65 microns	65 microns
Thickness of Sheet	3 mm	3 mm	3 mm	3 mm	3 mm	3 mm
Thickness of Base Plate	12 mm	16 mm	16 mm	16 mm	20 mm	20 mm
Bottom Dia	130 mm	135 mm	155 mm	175 mm	210 mm	230 mm
Top Dia	70 mm	70 mm	70 mm	70 mm	90 mm	90 mm
No of FDB Bolts	4	4	4	4	4	4

Note: 3mtr, 4mtr and 6 mtr Octagonal poles are also available on request

GRP POLES

Advantages of GRP poles: These are high corrosion resistance poles and are safe in accidents. These poles are light in weight and fast and easy for installation. GRP poles are electrically non conductive.

Manufacture / Construction: The GRP Pole will be made from a minimum of 62 to 70% electrical glass roving Encapsulated in a maximum of 30% high temperature cured specially formulated corrosion resistant unfilled epoxy resin matrix. The dielectric rating of the material will be at least 5k V / mm. The GRP Pole will be constructed from continuous electrical glass rovings. The GRP Pole shall be made via the filament winding process on a 4-axis CNC winding machine using PLC to control machine movements. Winding shall be done in such a way that GRP Pole has desired stiffness and strength. Substitution by alternate manufacturing process will not be permitted.

Thickness: GRP Pole shall have a minimum thickness of 6 mm up to 7mtr. besides what may be required to achieve the loading and safety specified in Clause 3.0

Flame Resistance: GRP Pole will not contain chlorine (or any halogen) or other toxic materials in excess of trace Levels and always less than safe OSHA (or equivalent) limits. When subjected to 2 consecutive 60 seconds flame Application, it must self extinguish after the last flame application

Surface Finish: GRP Pole will be provided with architecturally pleasing finish. It shall be provided with at least 1 layer of 2-part primer and at least 1 layer of premium grade 2-part polyurethane finish. GRP Pole will be free from defects, commercially practicable in color, shall be completely opaque, shall have a minimum density of 1.8 and other physical characteristics / properties mentioned below. In general, the GRP Pole shall be free from nicks and burrs

Color: GRP Pole will be supplied according to above color specification with 50-micron thickness done by the application of air-spray only

Applicable Standards: FES: 057L-1999, ANSI C136



DECORATIVE POLES

Landscape lighting forms an integral part of modern downtown and often provides “Signature” appearances. Designing an effective Landscape demands selecting right products that blend with the architecture and tune themselves with the surroundings. Modern urbanscape areas comprising of taller building, commercial spaces, recreational areas, areas of heritage importance and waterfronts use more and more landscape lighting to create an alluring environment. Crompton products combines with architecture to give any area a signature daytime appearance while providing effective night-time brilliance.

PHASED OUT PRODUCTS

INDOOR LIGHTING	LST-25-CDL-M/NL	CSADHMP30CDL
CCR-132-36-57-SL-NWH	LST-60-CDL	CSADHMP40CDL
LDL-05-CDL	LST-70-CDL	CSADHMP50CDL
LDL-05-NW	LST-90-CDL-M	CSADHMP60CDL
LDL-05-WW	LSTV-45-CDL	CSADEMPS09CDL
LDL-10-CDL	LSTN1-150-CDL-A-M	CSADEMPS12CDL
LDL-10-NW	LSTN1-170-CDL-A-M	CSADEMPS15CDL
LDL-10-WW	LSTN1-180-CDL-A-M	CSADEMPS18CDL
LDL-20-CDL	LSTN1-150-CDL-AHP-M	CSADEMPS20CDL
LDL-20-NW	LSTN1-180-CDL-AHP-M	CSADEMPS25CDL
LDL-20-WW	LSTN-200-CDL-A-M	CSADEMPS40CDL
LCTLN-10-CDL	LSTN-200-WW-A-M	CSADEMPS50CDL
LCTLN-10-NW	LSTN-220-CDL-A-M	CSADEMPS60CDL
LCTLN-10-WW	LSTN-250-CDL-A-M	CSADSMP09CDL
LCTLN-20-CDL	LSTN-270-CDL-A-M	CSADSMP12CDL
LCTLN-20-WW	LSTN-200-CDL-AHP-M	CSADSMP15CDL
LCTLN-20-NW	LSTN-220-CDL-AHP-M	CSADSMP20CDL
INDUSTRIAL LIGHTING	LSTN-250-CDL-AHP-M	CSADSMP25CDL
LWV12-30-(CDL)	LSTN-270-CDL-AHP-M	CSADSMP30CDL
LWV12-35-(CDL)	FLOOD LIGHTING	CSADSMP40CDL
LWV12-40-(CDL)	LFL-50-CDL/60-M	CSADSMP50CDL
LWV12-30-(CDL)-HP	LFL-60-CDL/60-M	CSADSPI09CDL
LWV12-35-(CDL)-HP	LSFO-250-CDL/60-M	CSADSPI12CDL
LWV12-40-(CDL)-HP	LSFO-300-CDL/60-M	CSADSPI15CDL
STREET LIGHTING	LSFO-350-CDL/60-M	CSADSPI18CDL
LSTP-60-CDL-M	LANDSCAPE LIGHTING	CSADSPI20CDL
LSTP-72-CDL-M	LPTOI-45-T	CSADSPI25CDL
LSTP-90-CDL-M	SOLAR LIGHTING	CSADSPI30CDL
LST-20-CDL-M	CSADHMP17CDL	CSADSPI40CDL
LST-20-CDL-M/NL	CSADHMP20CDL	CSADSPI50CDL
LST-25-CDL-M	CSADHMP25CDL	

Applicable for LED Luminaires / LED Lamps

- MRP indicates Maximum Retail Price. Product can't be sold above MRP. Taxes and local levies as applicable is inclusive.
- Prices are in Indian Rupees.
- Prices of all LED luminaires in this price list are for standard luminaire.
- Prices are inclusive of GST as per prevailing rate at the time of supply. Any statutory variation will be to purchaser's account.
- Goods are dispatched by us on Purchaser's risk. All claims for loss, damage or shortage will be filed by the Purchasers directly with the carriers.
- Orders should be placed in multiples of case lot.
- Items other than those included in this price list are withdrawn from the range.
- This pricelist supersedes our pricelist dated 15th Feb. 2021.
- All fixtures will be supplied as per our normal specifications. For additional features, please contact the nearest local office for details.
- Continuous design improvement is a routine practice at Crompton. Data provided may change without any prior information. Customers are advised to reconfirm the data or product dimensions before purchase at our local offices.
- Prices are subject to change without prior notice.
- All orders shall be placed in writing.
- Company reserves right to issue amendments, which may arise due to any errors in the price list.


CARE HAS BEEN TAKEN TO ENSURE THAT THE INFORMATION CONTAINED WITHIN IS CORRECT. HOWEVER, OWING TO CONTINUOUS INNOVATIONS AND IMPROVEMENTS THE ACTUAL PRODUCT WHEN SUPPLIED, MAY DIFFER FROM THE DETAILS GIVEN HEREIN.

PHOTOGRAPHS SHOWN HEREIN ARE INDICATIVE. PLEASE CHECK WITH NEAREST SALES OFFICE FOR THE ACTUAL PRODUCT.

CROMPTON RESERVES THE RIGHTS TO MAKE CHANGES IN THE DATA / DETAILS WITHOUT PRIOR NOTICE.

INSTALLATIONS



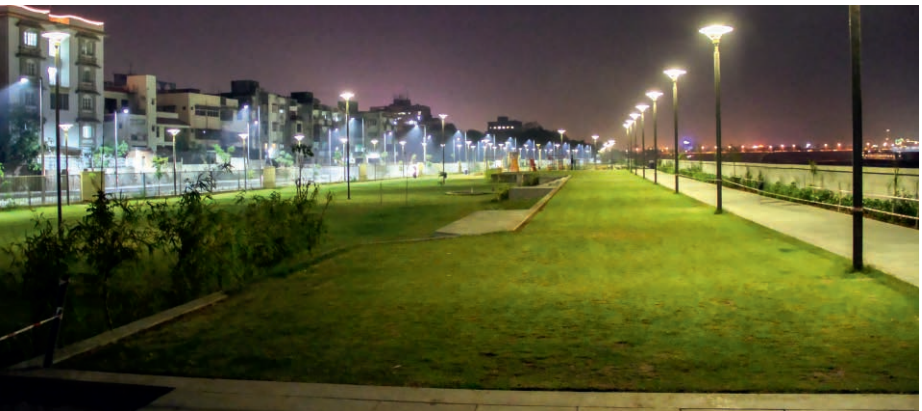

SALES OFFICES

Branches -

EAST REGION : (LightingB2B-Kolkata-RO@crompton.co.in)**Kolkata** : 52, Chowringhee Road, 5th Floor, Kolkata - 700071, India**Phone No.**

033-4051900

Guwahati : 3rd Floor, Shubham Velocity, Hanuram Boro Path Walford, GS Road, Guwahati, Assam- 781005

9678085875

Bhubaneswar : Janpath Tower, 3rd Floor, Ashok Nagar Unit II, Bhubaneswar - 751009, Odisha

0674-2531429

Ranchi : ESS Agencies 3 West End Park, Kaju Bagan, Near Dav Junior School. Hehal Ratu Road, Ranchi - 834005, Jharkhand

9771411293

Patna : 3rd Floor, Shri Sadan, House No. 9, Opp. Ruban Hospital, Near Patliputra Golamber, Patliputra Colony, Patna - 800013, Bihar

8407074981

WEST REGION : (LightingB2B-Mumbai-RO@crompton.co.in)**Mumbai** : Business Square, A-Wing, 302, 3rd floor, Chakala, Opp Apple Heritage, Andheri-Kurla Road, Andheri East, Mumbai- 400093

022 61132700

Ahmedabad : 4th Floor , 405 Gala Argos, BH Gujarat College, Ahmedabad 380007. Gujarat

9099924867

Pune : Durwankur Apartment, Wrangler Paranjape Road, Behind Vaishali Hotel, FC Road, Pune - 411004. Maharashtra

9167540712

Indore : 409, 4th Floor, Satguru Parinay, Infront of C21 Mall A .B. Road , Indore 452010 M.P.

9713244447

Nagpur : 2nd Floor, Manik Bhawan, Plot No.7&8,Tatya Tope Nagar, West High Court Road, Nagpur-440015. Maharashtra

7389604075

Raipur : A-311, Crystal Arcade, Lodhi Para Square, Shankar Nagar, Raipur - 492007.

7222933334

NORTH REGION : (LightingB2B-NewDelhi-RO@crompton.co.in)**New Delhi** : 9-10 Bahadur Shah Zafar Marg, 3rd Floor, Express Building, Near ITO Crossing. New Delhi-110002

011-23460700

Jaipur : Centre Point, 3rd Floor, Bhragu Nagar, Above Indusland Bank, DCM, Ajmer Road, Jaipur- 302006

0141-4712700

Jalandhar : Bxii-407, 2nd Floor, Near B.S.F. Chowk, Ladowali Road, Jalandhar - 144001

0181-5044240

Lucknow : Cyber Height, 2nd Floor, Office Space No.210, Vibhuti Khand, Gombi Nagar, Lucknow - 226010

0522-4001511

SOUTH REGION : (LightingB2B-Chennai-RO@crompton.co.in)**Chennai** : Crompton Greaves Consumer Electricals Limited, No. 4 (New), Old No. 5, Kanniah Street, T.Nagar, Chennai 600028044 - 40989533,
40989553, 4098514**Coimbatore** : SF219, Annamalai Industrial Park, Kalapatti, Coimbatore - 641 048

7094473102, 7094473103

Visakhapatnam : Flat No. 101, Gokul Complex, Nowroji Road, Maharaniapeta, Visakhapatnam - 530002

9642000224

Bengaluru : J.P. Square, 3rd Floor, No.17, 3rd Cross, 5th Main, Chamrajpet, Bengaluru - 560 018080 - 41391908, 41391914,
41391912**Hyderabad** : No. 101 & 102,Babukhan Millennium Centre, Somajiguda, Hyderabad - 500 082

040 - 40709975, 40709999

Cochin : Door No. 3/5788, Zera Tower Cheranalore, Cochin - 682034

0484- 2433860

Crompton

Dealer Stamp

Crompton Greaves Consumer Electricals Limited

Equinox Business Park, 1st Floor, Tower 3, LBS Marg,
Kurla (W), Mumbai 400070. T: +91 22 6167 8499
W: www.crompton.co.in