

**Panasonic**

**LED**

Illumination  
that inspires  
LED Lighting



April 2021

*Japanese quality promise. Made In India.*

# fixtures



Fixtures

Panel Light

Downlight

Outdoor

Decorative

Batten

Bulb



panel light

## Step Panel

3W, 5W, 10W, 15W, 20W

Brighten up the place with aesthetic sleek design

KEY FEATURES	CUSTOMER BENEFITS
<b>PERFORMANCE</b>	
Sleek Aluminum Housing with Step Design	Fit for low depth ceiling with good aesthetic
CRI>80	Provides actual sunlight feeling
Wide Voltage Range: 100-275V	Wide application, covering all the T2, T3 cites
Surge Protection: 2.5kV	No impact on performance even with bad power conditions / surges
Isolated Driver	Prevent component failure with additional safety during high voltages
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo Biologically Safe Light	Eye comfort
Edge Lit Type Led Arrangement	Uniform and glare free light out put
<b>SAFETY AND COMPLIANCES</b>	
Class II Electrical Protection	Shock proof even at high voltage, tested till 3.71kV
Driver Housing and Diffuser Material – Fire Retardant	In case of fire, it gets self-extinguished within 30 sec
Input Wire 0.75 sq.mm	High temperature withstanding to avoid melting of wire during usage
<b>OTHERS</b>	
BIS Approved	All the safety parameters are approved
Separate Driver Compartment	Hassle free service
Available in Round and Square Shape	Round & square shapes available



Circular



Square



EFFICACY

**>70**  
lm/W



CCT

**3000K, 4000K**  
**6500K**



CRI

**>80**

Applications: Residential, Small Offices,  
Service Areas, Retail Shops

## Eco Base Light

36W



Backlit design coupled with superior LED technology



EFFICACY

**>90**  
lm/W



CCT

**3000K**  
**4000K, 6500K**



CRI

**>80**

Applications: Office, Schools, Hospitals, Conference Hall, Banks, BPO. Suitable for frame ceilings (Armstrong/Gypsum)

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Low Depth Base Light

CRI>80

Wide Voltage Range: 100-275V

Surge Protection: 2.5kV

Life up to >25,000 Burning Hrs.

Better Lumen Maintenance

Photo Biologically Safe Light

Isolated Driver

Easy to fit on low depth ceiling

Provides actual sunlight feeling

Wide application, covering all the T2, T3 cities

No impact on performance even with bad power conditions / surges

Long life

Better consistency in lux / lighting levels through out life

Eye comfort

No impact on component during power fluctuation

#### SAFETY AND COMPLIANCES

Class II Electrical Protection

Diffuser Material – Fire Retardant

Input Wire 0.75 sq.mm

Shock proof even at high voltage, tested till 1.5kV

In case of fire, it gets self-extinguished within 30 sec

**High temperature withstanding to avoid melting of wire during usage**

#### OTHERS

BIS Approved

Elegant Aluminium Housing

Separate Driver Compartment

**All the safety parameters are approved**

Better aesthetic and performance

Hassle free service


## Adjustable Panel Light

12W, 18W



EFFICACY

**>100**  
lm/W



CCT

**3000K, 4000K**  
**6500K**



CRI

**>80**

Applications: Residential, Small Offices,  
Service Areas, Retail Shops

Super easy installation and zero hassles -  
Adjustable clips for multiple cut size

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Adjustable Clips on Panel

CRI>80

Wide Voltage Range: 100-275V

Surge Protection: 2.5kV

Life up to >25,000 Burning Hrs.

Better Lumen Maintenance

Photo Biologically Safe Light

Full Glow Diffuser

Can be fitted to multiple cut out sizes

Provides actual sunlight feeling

Wide application, covering all the T2, T3 cites

No impact on performance even with  
bad power conditions / surges

Long life

Better consistency in lux / lighting levels  
through out Life

Eye comfort

More light spread with better aesthetic

#### SAFETY AND COMPLIANCES

Class II Electrical Protection

Housing & Diffuser Material – Fire Retardant

Input Wire 0.75 sq.mm

Shock proof even at high voltage, tested till 3.71kV

In case of fire, it gets self-extinguished within 30 sec

**High temperature withstanding to avoid  
melting of wire during usage**

#### OTHERS

BIS Approved


Separate Driver Compartment

Adjustable Clip

**All the safety parameters are approved**

Hassle free service

No need to change cutout hole as clip can be  
adjusted as per hole

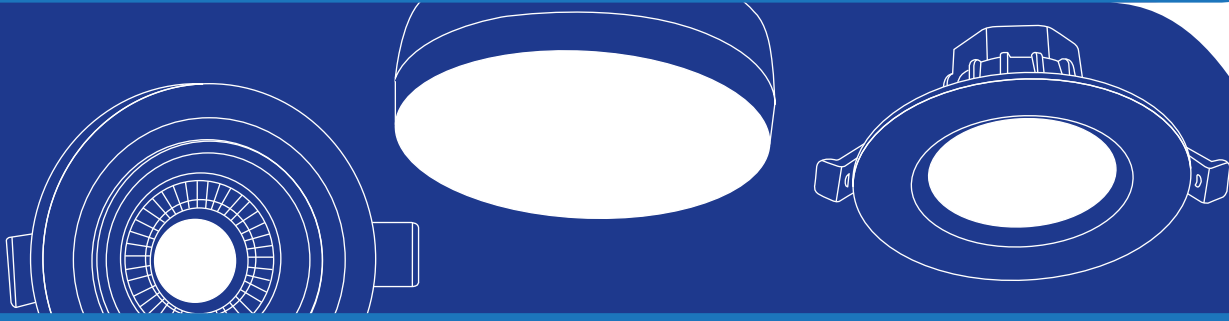

downlight

# Panasonic

## Concealed Downlight

5W, 7W, 9W



EFFICACY

**>80**  
lm/W



CCT

**6500K, 4000K, 3000K,  
RED, GREEN, BLUE**



CRI

**>80**

Applications: Cabinets, Bedroom, Halls, Shops

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Wide Voltage Range: 100-300V

CRI>80

Surge Protection: 2.5kV

Life up to >25,000 Burning Hrs.

Better Lumen Maintenance

Photo Biologically Safe Light

Available in 3 Light Colours

Wide application, covering all the T2, T3 cities

Provides actual sunlight feeling

Better performance even with bad power conditions / surges

Long life

Better consistency in lux / lighting levels through out life

Eye comfort

Used for decorative lights

#### SAFETY AND COMPLIANCES

Class II Electrical Protection

Housing & Diffuser Material – Fire Retardant

Input Wire 0.75 sq.mm

Shock proof even at high voltage, tested till 3.71kV

In case of fire, it gets self-extinguished within 30 sec

High temperature withstanding to avoid melting of wire during usage

#### OTHERS

BIS Approved Product

Available in Multiple Wattage

Fit for Conceal Boxes

All the safety parameters are approved

Variants based on customer usage: 5,7,9W

Multipurpose – ceiling +junction box




## Deep Junction

3W



Sleek design suitable for low depth ceiling

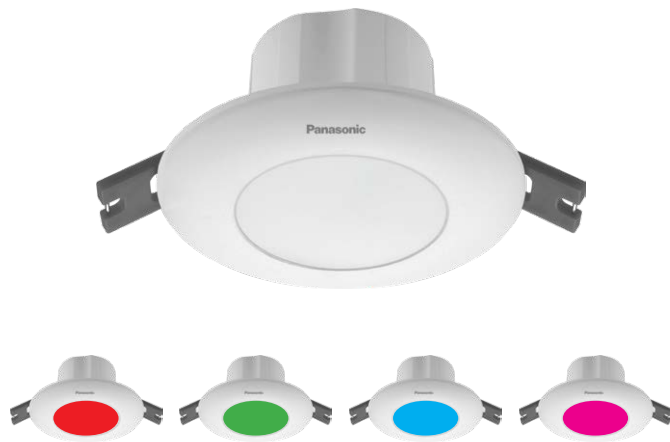

EFFICACY

**>80**  
lm/W



CCT

**6500K, 4000K, 3000K,  
RED, GREEN, BLUE, PINK**



CRI

**>80**

Applications: Cabinets, Bedroom, Halls, Shops

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Wide Voltage Range: 100-275V

CRI>80

Surge Protection: 2.5kV

Low Depth Deep Junction (80x32mm)

Life up to >25,000 Burning Hrs.

Better Lumen Maintenance

Photo Biologically Safe Light

Fit for Junction Box

Wide application, covering all the T2, T3 cities

Provides actual sunlight feeling

Better performance even with bad power conditions / surges

Compact design to install in small spaces

Long life

Better consistency in lux / lighting levels through out life

Eye comfort

Multipurpose – Ceiling + Junction Box

#### SAFETY AND COMPLIANCES

Class II Electrical Protection

Housing & Diffuser Material – Fire Retardant

Input Wire 0.75 sq.mm

Shock proof even at high voltage, tested till 3.71kV

In case of fire, it gets self-extinguished within 30 sec

**High temperature withstanding to avoid melting of wire during usage**

#### OTHERS

BIS Approved Product

Available in 4 Light Colours

Easy Installation

All the safety parameters are approved

Used for decorative lights

Easy to connect

# Panasonic

## Spot Light

2W



EFFICACY

**>80**  
lm/W



CCT

**6500K, 3000K,  
RED, GREEN, BLUE**



CRI

**>80**

Applications: Cabinets, Bedroom, Halls, Shops

Adds a spark of style and focus to any space

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Wide Voltage Range: 100-300V

CRI>80

Surge Protection: 2.5kV

Life up to >15,000 Burning Hrs.

Better Lumen Maintenance

Photo Biologically Safe Light

Compact Design (16mm Height)

Wide application, covering all the T2, T3 cities

Provides actual sunlight feeling

Better performance even with bad power conditions / surges

Long life product

Better consistency in lux / lighting levels through out Life

Eye comfort

Compact design to install in small spaces

#### SAFETY AND COMPLIANCES

Class II Electrical Protection

Housing & Diffuser Material – Fire Retardant

Input Wire 0.75 sq.mm

Shock proof even at high voltage, tested till 3.71kV

In case of fire, it gets self-extinguished within 30 sec

High temperature withstanding to avoid melting of wire during usage

#### OTHERS

BIS Approved

Available in 3 Light Colours

Separate Driver Compartment

All the safety parameters are approved

Used for decorative lights

Hassle free servicing

Downlight

Outdoor

Decorative

Batten

Bulb

## Swivel Downlight


3W, 6W

Adjustable swivel, perfect for highlighting areas of interest



EFFICACY

**>70**  
lm/W



CCT

**3000K**  
**6500K**



CRI

**>80**

Applications: Ceiling, Living Room, Shops

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Wide Voltage Range: 140-275V

CRI>80

Surge Protection: 2.5kV

Prismatic Diffuser

Life up to >25,000 Burning Hrs.

Swivel Type Design

Photo Biologically Safe Light

Wide application, covering all the T2, T3 cities

Provides actual sunlight feeling

No impact on performance even with bad power conditions / surges

Prevent glare/direct light on eyes

Long life product

Tiltable angle for light output (45°)

Eye comfort

#### SAFETY AND COMPLIANCES

Class II Electrical Protection

Housing & Diffuser Material – Fire Retardant

Input Wire 0.75 sq.mm

Shock proof even at high voltage, tested till 3.71kV

In case of fire, it gets self-extinguished within 30 sec

High temperature withstanding to avoid melting of wire during usage

#### OTHERS

BIS Approved Product



Fit for Ceiling

All the safety parameters are approved

Can be used as spot light, focus light

## Mini Surface Downlight

3W

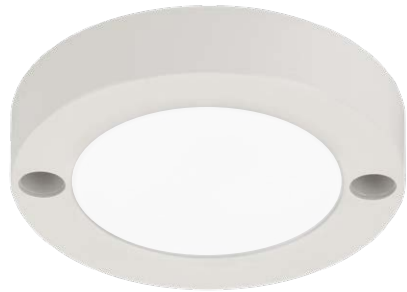

EFFICACY

**>55**  
lm/W



CCT

**6500K, 3000K,  
RED, GREEN, BLUE**



CRI

**>80**

Applications: Cabinets, Bedroom, Halls, Shops

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Wide Voltage Range: 100-300V

CRI>80

Surge Protection: 2.5kV

Life up to >15,000 Burning Hrs.

Low Depth Surface: DL-13mm Depth

Better Lumen Maintenance

Photo Biologically Safe Light

Wide application, covering all the T2, T3 cities

Provides actual sunlight feeling

No impact on performance even with bad power conditions / surges

Long life product

Slim design for better aesthetic

Better consistency in lux / lighting levels through out life

Eye comfort

#### SAFETY AND COMPLIANCES

Class II Electrical Protection

Housing & Diffuser Material – Fire Retardant

Input Wire 0.75 sq.mm

Shock proof even at high voltage, tested till 3.71kV

In case of fire, it gets self-extinguished within 30 sec

High temperature withstanding to avoid melting of wire during usage

#### OTHERS

BIS Approved Product

Available in 5 Light Colours

All the safety parameters are approved

Used for decorative lights

## Modular Surface

7W, 9W, 15W

Twist and Fit - Easy installation for the pleasing and perfect light balance



EFFICACY

**>100**  
lm/W



CCT

**6500K, 3000K,  
RED, GREEN, BLUE**



CRI

**>80**

Applications: Bedroom, Halls, Shops

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Wide Voltage Range: 100-300V

CRI>80

Surge protection: 2.5kV

Lumen Efficacy: >100lm/W

Life up to >25,000 Burning Hrs.

Twist and Fit Type Assembly

Photo Biologically Safe Light

Rimless Diffuser

Wide application, covering all the T2, T3 cites

Provides actual sunlight feeling

No impact on performance even with bad power conditions / surges

Better light output with less power consumption

Long life product

Easy Fitment to Holder

Eye comfort

Full glow diffuser for better light spread

#### SAFETY AND COMPLIANCES

Class II Electrical Protection

Housing & Diffuser Material – Fire Retardant

Input Wire 0.75 sq.mm

Shock proof even at high voltage, tested till 3.71kV

In case of fire, it gets self-extinguished within 30 sec

**High temperature withstanding to avoid melting of wire during usage**

#### OTHERS

BIS Approved Product

Available in 3 Light Colours

Fit for Junction Box Also


All the safety parameters are approved

Used for decorative lights

Compatible for junction box also

## PC Downlight

5W, 10W, 15W, 20W

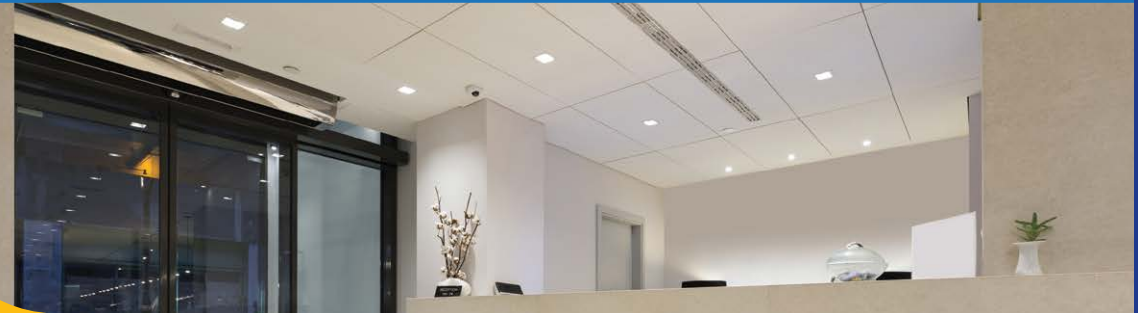

EFFICACY

**>80**  
lm/W



CCT

**3000K, 4000K,  
6500K**



CRI

**>80**

Applications: Residential, Small Offices,  
Service Areas, Retail Shops

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Lumen Efficacy: >80lm/W

CRI>80

Surge Protection: 2.5kV

Wide Voltage Range: 140-275V

Life up to >25,000 Burning Hrs.

Better Lumen maintenance

Photo Biologically Safe Light

PC Diffuser

More light with less power consumption

Provides actual sunlight feeling

No impact on performance even with bad power conditions / surges

Wide application, covering all the T2, T3 cities

Long life product

Better consistency in lux / lighting levels through out life

Eye comfort

Prevent glare/direct light on eyes

#### SAFETY AND COMPLIANCES

Class II Electrical Protection

Housing & Diffuser Material – Fire Retardant

Input Wire 0.75 sq.mm

Shock proof even at high voltage, tested till 3.71kV

In case of fire, it gets self-extinguished within 30 sec

**High temperature withstanding to avoid melting of wire during usage**

#### OTHERS

BIS Approved Product

Easy Installation


Available in Round and Square Shape

All the safety parameters are approved

Easy to install on ceiling

Better aesthetic shape with large diffuser area

outdoor

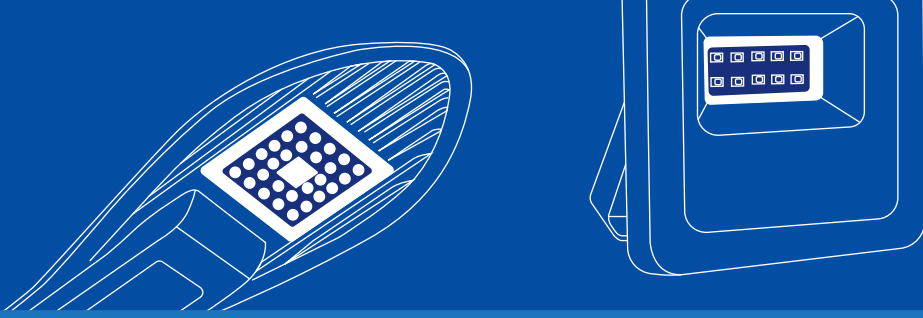

# Panasonic

## Street Light Dolphin Shape

15W, 25W, 45W, 60W, 75W



EFFICACY

**>100**  
lm/W



CCT

**3000K**  
**6500K**



CRI

**>80**

Applications: Street light, Pathway, Garden, Playground, Buildings & Compound lighting

Higher life and higher performance  
for extremely safe & reliable surroundings

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Lumen Efficacy: > 100 Lm/W

Wide Voltage Range: 140-270V

Surge Protection: 4kV for 15W, 25W & 45W,  
10kV for 60W and 75W

IP66 Protections

Life up to >25,000 Burning Hrs.

Better Lumen Maintenance

Photo Biologically Safe Light

Aerodynamic Al housing Design for Better  
Thermal Management

More light with less power consumption

Wide application, covering all the T2, T3 cites

Better performance even with bad power  
conditions / surges

Can withstand rain and dust protection

Long life

Better consistency in lux / lighting levels  
through out life

Eye comfort

Better consistency. Lux levels and reliability  
at extreme temp condition.

#### SAFETY AND COMPLIANCES

Electrical Strength

Lens Material – Fire Retardant

Isolated Driver

Shock proof even at high voltage, tested till 1.5kV

In case of fire, it gets self-extinguished within 30 sec

No impact of power fluctuation

#### OTHERS

BIS Approved

Contemporary Dolphin Shape

Separate Driver Compartment

All the safety parameters are approved

Better aesthetics

Hassle free servicing

Outdoor

Decorative

Batten

Bulb




## Bulk Head

12W



EFFICACY

**>90**  
lm/W



CCT

**3000K**  
**6500K**



CRI

**>80**

Applications: Lawns, Gardens, Pathways,  
Courtyard, Factories

Sleek and elegant oval shape design for that perfect indoor and outdoor application

KEY FEATURES	CUSTOMER BENEFITS
<b>PERFORMANCE</b>	
Lumen Efficacy: > 90 Lm/W	More light with less power consumption
Wide Voltage Range: 140-270V	Wide application, covering all the T2, T3 cities
Surge Protection: 2.5kV	No impact on performance even with bad power conditions / surges
IP65 Product	Can withstand rain and dust protection
Life up to >30,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo Biologically Safe Light	Eye comfort
Slim Design with Surface Fitting	Low depth bulk head for better aesthetic
<b>SAFETY AND COMPLIANCES</b>	
Class II Electrical Protection	Shock proof even at high voltage, tested till 1.5kV
Housing & Diffuser Material – Fire Retardant	In case of fire, it gets self-extinguished within 30 sec
Input Wire 0.75 sq.mm	<b>High temperature withstanding to avoid melting of wire during usage</b>
<b>OTHERS</b>	
BIS Approved	<b>All the safety parameters are approved</b>
Easy Installation	Easy to fit on wall
Full Glow Diffuser	More light spread and output

# Panasonic

## Flood Light

10W, 20W, 30W, 50W, 100W



Sturdy and robust design for quality performance



EFFICACY

**>100**  
lm/W



CCT

**3000K**  
**6500K**



CRI

**>80**

Applications: Outdoor, Shops, Party Hall

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Lumen Efficacy: >100 Lm/W

Wide Voltage Range: 100-275V

Surge Protection: 4kV

IP65 & IK07 Protection

Life up to >25,000 Burning Hrs.

Better Lumen Maintenance

Better Thermal Management

High Voltage Application up to 440V

More light with less power consumption

Wide application, covering all the T2, T3 cities

No impact on performance even with bad power conditions / surges

Robust design suitable for outdoor application (Rain and dust protection)

Long life

Better consistency in lux / lighting levels through out life

Long life

Can withstand 440V for 30 mins.

#### SAFETY AND COMPLIANCES

Class II Electrical Protection

Driver Housing Material – Fire Retardant

Input Wire 0.75 sq.mm

Shock proof even at high voltage, tested till 1.5kV

In case of fire, it gets self-extinguished within 30 sec

**High temperature withstanding to avoid melting of wire during usage**

#### OTHERS

BIS Approved

Elegant Aluminium Die Cast Housing

Easy Installation

All the safety parameters are approved

Better aesthetic and performance

Easy to fit on wall


Outdoor

Decorative

Batten

Bulb

decorative

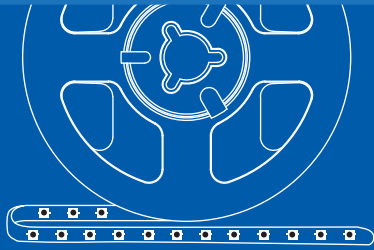

## Strip Light

25W - 60LED/meter IP20 & IP65  
90W - 180LED/meter IP20



EFFICACY

**>80**  
lm/W



CCT

**6500K, 4000K, 3000K,  
RED, GREEN, BLUE**



CRI

**>80**

Applications: Home Decoration, Cove Lighting, Display, Shops



Decorative effect to ceiling and room for perfect elegance

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Input Voltage: 12V DC & 24V DC

CRI>80

Ingress Protection: IP20 & IP65

Life up to >50,000 Burning Hrs.

Easy Installation

Photo Biologically Safe light

Can be cut at Different Length

Easy available driver

Provides actual sunlight feeling

Suitable for Indoor as well as outdoor application

Long life

Suitable for cove lighting

Eye comfort

Customised lighting as per requirement

#### SAFETY AND COMPLIANCES

Electrical Strength up to 500V

SELV Product – Hence, No Electrical Shock

Input Wire 0.75 sq.mm

Shock proof even at high voltage, tested till 500V.

No electrical shock even with physical contact as it operates on 12V DC.

high temperature withstanding to avoid melting of wire during usage.

#### OTHERS

BIS Approved

Available in 6 Light Colours

60 & 180 LED/Meter

All the safety parameters are approved.

Used for decorative lights

Uniform lighting

## Strip Light

50W



Colourful lights ambience for every occasion and mood



EFFICACY  
**NA**



CCT  
**RED, GREEN, BLUE**  
Changeable colour  
with Remote



CRI  
**NA**

Applications: Home Decoration, Cove Lighting, Display, Shops

KEY FEATURES	CUSTOMER BENEFITS
<b>PERFORMANCE</b>	
Changeable Colour with Remote	16 colour modes available
Dimmable	Dimming of light is possible
Can be cut at Different Length	Customised lighting as per requirement
With RGB Controller and Remote	Creates ambience
Life up to >50,000 Burning Hrs.	Long life
Easy Installation	Suitable for cove lighting
Photo Biologically Safe Light	Eye comfort
<b>SAFETY AND COMPLIANCES</b>	
Electrical Strength up to 500V	Shock proof even at high voltage, tested till 500V
Selv Product – Hence, No Electrical Shock	No electrical shock even with physical contact as it operates on 12V DC
Input Wire 0.75 sq.mm	High temperature withstanding to avoid melting of wire during usage.
<b>OTHERS</b>	
BIS Approved	All the safety parameters are approved.
Changeable Light Colours	Used for decorative lights
IR Remote	Easy control

# Panasonic

## Desk Lamp

5W




Perfect modern, portable and light weight lamp for that elegant look on your table



EFFICACY

**>130**  
lm/W



CCT

**4000K, 3000K/  
4000K/5000K**



CRI

**>80**

Applications: Study Room, Bedside Lamp, Office Workspace

KEY FEATURES	CUSTOMER BENEFITS
<b>PERFORMANCE</b>	
Dimming Option: High/Medium/Low	Adjustable brightness level, suitable for reading
CRI>80	Provides actual sunlight feeling
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cities
Surge Protection: 2.5kV	No Impact on performance even with bad power conditions / surges
Life up to >25,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels through out Life
Photo Biologically Safe Light	Eye comfort
PC Diffuser	Prevent glare/direct light on eyes
<b>SAFETY AND COMPLIANCES</b>	
Electrical Strength up to 3.71kV with Earthing	Shock proof even at high voltage, tested till 3.71kV
Housing & Diffuser Material - Fire Retardant	In case of fire, it gets self-extinguished within 30 sec
Input Wire 0.75 sq.mm	High temperature withstanding to avoid melting of wire during usage
<b>OTHERS</b>	
BIS Approved	All the safety parameters are approved
Mobile Holder	Comfortable hands-free viewing experience
Feather Touch Mode Changing	Less effort for changing modes

Decorative


Batten

Bulb

# Panasonic

## Deco Ceiling

22W

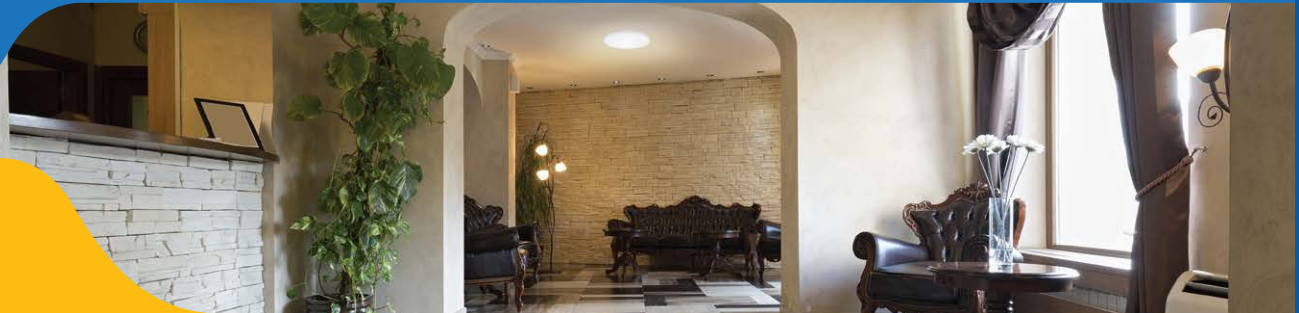

Elegance and illumination for every application decor



EFFICACY

**>85**  
lm/W



CCT

**6500K**



CRI

**>80**

Applications: Residential, Small Offices,  
Service Areas, Retail Shop

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Ceiling Light with Full Glow Diffuser	More light output with large diffuser area
CRI>80	Provides actual sunlight feeling
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cities
Surge Protection: 2.5kV	No Impact on performance even with bad power conditions / surges
Life up to >25,000 Burning Hrs.	Long life
Better Lumen Maintenance	Better consistency in lux / lighting levels through out life
Photo Biologically Safe Light	Eye comfort
Al housing design for better thermal management	Better consistency. Lux levels and reliability at extreme temp condition.

#### SAFETY AND COMPLIANCES

Class I Electrical Protection	Shock proof even at high voltage, tested till 1.5kV
Diffuser Material – Fire Retardant	In case of fire, it gets self-extinguished within 30 sec
Input Wire 0.75 sq.mm	<b>High temperature withstanding to avoid melting of wire during usage</b>

#### OTHERS

BIS Approved	All the safety parameters are approved
Elegant Aluminium Housing	Better aesthetic and performance
Screw Less Design	Easy to install

batten





## Aluminium Batten

36W




Zyada jale, Zyada chale.

KEY FEATURES	CUSTOMER BENEFITS
<b>PERFORMANCE</b>	
Lumen Efficacy: >100lm/W	More light with less power consumption
CRI >80	Provides actual sunlight feeling
Surge Protection: 2.5kV	No impact on performance even with bad power conditions / surges
Wide Voltage Range: 140-275V	Wide application, covering all the T2, T3 cites
Life up to >25,000 Burning Hrs.	Long life product
Better Lumen Maintenance	Better consistency in lux / lighting levels through out Life
Photo Biologically Safe Light	Eye Comfort
Aluminium Housing Design for Better Thermal Management	<b>Better consistency. Lux levels and reliability at extreme temp condition</b>
<b>SAFETY AND COMPLIANCES</b>	
Class I Electrical Protection	Shock proof even at high voltage, tested till 1.5kV
Diffuser Material – Fire Retardant	In case of fire, it gets self-extinguished within 30 sec
Input Wire 0.75 sq.mm	<b>High temperature withstanding to avoid melting of wire during usage</b>
<b>OTHERS</b>	
BIS Approved Product	<b>All the safety parameters are approved</b>
Elegant Aluminium Housing	Better aesthetic and performance
Length 1170 mm	Larger length with more light output



EFFICACY  
**>100**  
lm/W



CCT  
**6500K**




CRI  
**>80**


Applications: Garage, House, Shops

## PC Batten

5W, 10W, 15W, 20W, 22W, 24W, 26W

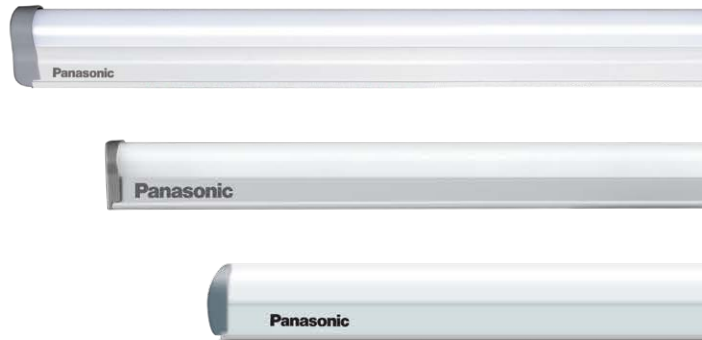

EFFICACY  
**>100**  
lm/W



CCT  
**3000K**  
**4000K, 6500K**



CRI  
**>80**

Applications: House, Shops



Bright friend of villagers to city dwellers

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Lumen Efficacy: >100lm/W

More light with less power consumption

CRI >80

Provides actual sunlight feeling

Surge Protection: 3.5kV

No impact on performance even with bad power conditions / surges

Wide Voltage Range: 140-275V

Wide application, covering all the T2, T3 cities

Life up to >25,000 Burning Hrs.

Long life product

Better Lumen Maintenance

Better consistency in lux / lighting levels through out Life

Photo Biologically Safe Light

Eye comfort

High Voltage Application upto 440V

Can withstand 440V for 30 mins.

#### SAFETY AND COMPLIANCES

Class II Electrical Protection

Shock proof even at high voltage, tested till 3.71kV

Housing & Diffuser Material - Fire Retardant

In case of fire, it gets self-extinguished within 30 sec

Input Wire 0.75 Sq.mm

High temperature withstanding to avoid melting of wire during usage

#### OTHERS

BIS Approved Product

All the safety parameters are approved

20W Batten Available In 3 Colour

Decorative purpose lighting

Available in Different Shapes And Length

Round, Square, Oval, Curvy shape batten available

## Night Glow Batten

22W+2W




As bright as sun, as cool as moon



EFFICACY

**>100**  
lm/W



CCT

**3000K, 6500K**  
**(Night Mode)**



CRI

**>80**

Applications: Houses, Bedroom, Lobby, Living Room

### KEY FEATURES

### CUSTOMER BENEFITS

#### PERFORMANCE

Lumen Efficacy: >100lm/W

CRI>80

Surge Protection >2.5kV

Wide Voltage Range: 140-275V

Life up to >25,000 Burning Hrs.

Better Lumen Maintenance

Photo Biologically Safe Light

Works As Night Lamp

More light with less power consumption

Provides actual sunlight feeling

No impact on performance even with bad power conditions / surges

Wide application, covering all the T2, T3 cities

Long life product

Better consistency in lux / lighting levels through out Life

Eye comfort

Double application (Batten + Night Lamp)

#### SAFETY AND COMPLIANCES

Class II Electrical Protection

Housing & Diffuser Material - Fire Retardant

Input Wire 0.75 sq.mm

Shock proof even at high voltage, tested till 3.71kV

In case of fire, it gets self-extinguished within 30 sec

**High temperature withstanding to avoid melting of wire during usage**

#### OTHERS

BIS Approved Product

4 Feet Length (1191mm)

Available in Mushroom Shape

**All the safety parameters are approved**

More light output with larger length

Light spread more than conventional

bulbs



## Candle Bulb

4W



EFFICACY

**>100**  
lm/W



CCT

**3000K**  
**6500K**



CRI

**>80**

Applications: Living Rooms, Chandeliers, Showrooms. etc.

Sparkly glow for elegant decor look

### KEY FEATURES

### CUSTOMER BENEFITS

#### PRODUCT DESIGN & PERFORMANCE

Lumen Efficacy	High light output with low power consumption gives brighter light in dark areas.
UV Resistant Diffuser	Protect diffuser from getting yellowing in long run.
Selection of Electronic Components Based of Temp. Rating	Robust component due to which less failure since product is tested at 45° ambient temperature.
PBT + AL Housing	Better heat dissipation in the product in order to achieve the desired lumen maintenance and life.
Beam Angle	Wide beam angle (120°) - light reaches to every corner of room.

#### SAFETY AND COMPLIANCES

FR Grade Housing Material	Plastic housing is fire proof, so there is low risk of fire hazard.
Photo Biological Safety	No harmful effect on eyes and skin since LED used in the product does not emit harmful blue light.
Electric Strength	No electric shock hazard - product is tested upto 3.71kV and tested for insulation resistance wherein electronic components will not come in contact with human body.

#### RELIABILITY


Wide Voltage Range: 100-300VAC	Operate without malfunctioning or decay/reduction in light output
Lumen Maintenance	Better electronic components and heat management gives consistency in light output for long period of time.
Surge Protection: 3.5kV	Save product from electric surge during fault in supply transformer.
High Voltage	High voltage withstanding up-to 440V, to save the product from high voltage spikes continuously for 30 minutes.
Product Life >25,000 Burning Hrs.	Calculated based on the standard temperature conditions.
LED	LM80 tested LED's are used which gives long life and better reliability, LED's color does not change overtime.

## Bulb

3W, 5W, 7W, 9W, 12W,  
15W, 18W, 23W, 26W



EFFICACY  
**>90-100**  
lm/W



CCT  
**3000K**  
**6500K**



CRI  
**>80**

Applications: Living Rooms, Stores, Shops, etc.

Always shines brightly intercepting any input power condition

### KEY FEATURES

### CUSTOMER BENEFITS

#### PRODUCT DESIGN & PERFORMANCE

Lumen Efficacy	High light output with low power consumption gives brighter light in dark areas.
UV Resistant Diffuser	Protect Diffuser from getting yellowing in long run.
Selection of Electronic Components Based of Temp. Rating	Robust component due to which less failure since product is tested at 45° ambient temperature.
PBT + AL Housing	Better heat dissipation in the product in order to achieve the desired lumen maintenance and life.
Beam Angle	Wide beam angle (120°) - light reaches to every corner of room.

#### SAFETY AND COMPLIANCES

FR Grade Housing Material	Plastic housing is fire proof, so there is low risk of fire hazard.
Photo Biological Safety	No harmful effect on eyes and skin since LED used in the product does not emit harmful blue light.
Electric Strength	No electric shock hazard - product is tested upto 3.71kV and tested for insulation resistance wherein electronic components will not come in contact with human body.

#### RELIABILITY

Wide Voltage Range: 100-300VAC	Operate without malfunctioning or decay/reduction in light output
Lumen Maintenance	Better electronic components and heat management gives consistency in light output for long period of time.
Surge Protection: 3.5kV	Save product from electric surge during fault in supply transformer.
High Voltage	High voltage withstanding up-to 440V, to save the product from high voltage spikes continuously for 30 minutes.
Product Life >25,000 burning hrs.	Calculated based on the standard temperature conditions.
LED	LM80 tested LED's are used which gives long life and better reliability, LED's color does not change overtime.

## Bulb High Lumen Capacity

7W, 9W



EFFICACY

**>105**  
lm/W



CCT

**6500K**



CRI

**>80**

Applications: Living Rooms, Stores, Shops, etc.

### Brighter light for every space

#### KEY FEATURES

#### CUSTOMER BENEFITS

#### PRODUCT DESIGN & PERFORMANCE

Lumen Efficacy	High light output with low power consumption gives brighter light in dark areas.
UV Resistant Diffuser	Protect Diffuser from getting yellowing in long run.
Selection of Electronic Components Based of Temp. Rating	Robust component due to which Less failure since product is tested at 45° ambient temperature.
PBT + AL Housing	Better heat dissipation in the product in order to achieve the desired lumen maintenance and life.
Beam Angle	Wide beam angle (120°) - light reaches to every corner of room.

#### SAFETY AND COMPLIANCES

FR Grade Housing Material	Plastic housing is fire proof, so there is low risk of fire hazard.
Photo Biological Safety	No harmful effect on eyes and skin since LED used in the product does not emit harmful blue light.
Electric Strength	No electric shock hazard - product is tested upto 3.71kV and tested for insulation resistance wherein electronic components will not come in contact with human body.

#### RELIABILITY

Wide Voltage Range: 100-300VAC	Operate without malfunctioning or decay/reduction in light output
Lumen Maintenance	Better electronic components and heat management gives consistency in light output for long period of time.
Surge Protection: 3.5kV	Save product from electric surge during fault in supply transformer.
High Voltage	High voltage withstanding up-to 440V, to save the product from high voltage spikes continuously for 30 minutes.
Product Life >25,000 Burning Hrs.	Calculated based on the standard temperature conditions.
LED	LM80 tested LED's are used which gives long life and better reliability, LED's color does not change overtime.

## HW Bulb

30W, 40W, 50W



EFFICACY

**>100**  
lm/W



CCT

**3000K**  
**6500K**



CRI

**>80**

Applications: Warehouse, Stores, Garage, etc.



Pocket herculis, small size, bright light

### KEY FEATURES

### CUSTOMER BENEFITS

#### PRODUCT DESIGN & PERFORMANCE

Lumen Efficacy	High light output with low power consumption gives brighter light in dark areas.
UV Resistant Diffuser	Protect diffuser from getting yellowing in long run.
Selection of Electronic Components Based of Temp. Rating	Robust component due to which Less failure since product is tested at 45° ambient temperature.
PBT + AL Housing	Better heat dissipation in the product in order to achieve the desired lumen maintenance and life.
Beam Angle	Wide beam angle (150°) - light reaches to behind the Lamp as well which is not possible in case of low beam angle product.

#### SAFETY AND COMPLIANCES

FR Grade Housing Material	Plastic housing is fire proof, so there is low risk of fire hazard.
Photo Biological Safety	No harmful effect on eyes and skin since LED used in the product does not emit harmful blue light.
Electric Strength	No electric shock hazard - product is tested upto 3.71kV and tested for insulation resistance wherein electronic components will not come in contact with human body.

#### RELIABILITY

Wide Voltage Range: 100-300VAC	Operate without malfunctioning or decay/reduction in light output
Lumen Maintenance	Better Electronic Components and heat management gives consistency in light output for long period of time.
Surge Protection: 3.5kV	Save product from electric surge during fault in supply transformer.
High Voltage	High voltage withstanding up-to 440V, to save the product from high voltage spikes continuously for 30 minutes.
Product Life >25,000 Burning Hrs.	Calculated based on the standard temperature conditions.
LED	LM80 tested LED's are used which gives long life and better reliability, LED's color does not change overtime.



# Panasonic


## Smart Bulb

9W



EFFICACY

**>80**  
lm/W



CCT

**16 MILLION**  
**COLORS**



CRI

**>80**

Applications: Living Rooms, Pubs, Restaurant, etc.



Smart life. Colourful moments.

### KEY FEATURES

### CUSTOMER BENEFITS

#### PRODUCT DESIGN & PERFORMANCE

16 Million Colors	16 million colors to choose from as per your mood including true white and warm white.
UV Resistant Diffuser	Protect diffuser from getting yellowing in long run.
Selection of Electronic Components Based of Temp. Rating	Robust component due to which less failure since product is tested at 45 <sup>0</sup> ambient temperature.
Scheduling	Schedule the ON-OFF timing of product along with dimming function, select CCT/shades depending upon the requirement.
Wi-Fi Enabled	Operated on 2.4Ghz frequency by Mobile Phones, also by Alexa and Google voice commands.

#### SAFETY AND COMPLIANCES

FR Grade Housing Material	Plastic housing is fire proof, so there is low risk of fire hazard.
Photo Biological Safety	No harmful effect on eyes and skin since LED used in the product does not emit harmful blue light.
Electric Strength	No electric shock hazard - product is tested upto 3.71kV and tested for insulation resistance wherein electronic components will not come in contact with human body.

#### RELIABILITY

Wide Voltage Range: 120-330VAC	Operate without malfunctioning or decay/reduction in light output
Lumen Maintenance	Better electronic components and heat management gives consistency in light output for long period of time.
Surge Protection: 3.5kV	Save product from electric surge during fault in supply transformer.
High Voltage	High voltage withstanding up-to 440V, to save the product from high voltage spikes continuously for 30 minutes.
Product Life >25,000 Burning Hrs.	Calculated based on the standard temperature conditions.
LED	LM80 tested LED's are used which gives long life and better reliability, LED's color does not change overtime.

## Radars Bulb

9W



EFFICACY

**>100**  
lm/W



CCT

**3000K**  
**6500K**



CRI

**>80**



SENSOR RANGE

**3 mtr.**  
**Radius**

Applications: General Shops, Small Offices, Homes, Reception Areas, Restaurants, Hospital Lobbies & Passages

### Light triggered by motion

#### KEY FEATURES

#### CUSTOMER BENEFITS

#### PRODUCT DESIGN & PERFORMANCE

Detection Range	3 Mtr detection range for detecting even small movement.
UV Resistant Diffuser	Protect diffuser from getting yellowing in long run.
Selection of Electronic Components Based of Temp. Rating	Robust component due to which less failure since product is tested at 45° ambient temperature.
Radar Sensor	Better detection area than conventional PIR lamp, since exposed part of PIR is lesser than radar sensor.
ON-OFF Timing	After sensing presence bulb switch ON and remains ON for 20 seconds and when no movement it remains OFF.

#### SAFETY AND COMPLIANCES

FR Grade Housing Material	Plastic housing is fire proof, so there is low risk of fire hazard.
Photo Biological Safety	No harmful effect on eyes and skin since LED used in the product does not emit harmful blue light.
Electric Strength	No electric shock hazard - product is tested upto 3.71kV and tested for insulation resistance wherein electronic components will not come in contact with human body.

#### RELIABILITY

Wide Voltage Range: 120-330VAC	Operate without malfunctioning or decay/reduction in light output.
Lumen Maintenance	Better electronic components and heat management gives consistency in light output for long period of time.
Surge Protection: 3.5kV	Save product from electric surge during fault in supply transformer.
High Voltage	High voltage withstanding up-to 440V, to save the product from high voltage spikes continuously for 30 minutes.
Product Life >25,000 Burning Hrs.	Calculated based on the standard temperature conditions.
LED	LM80 tested LED's are used which gives long life and better reliability, LED's color does not change overtime.


## Emergency Bulb

7W, 10W



EFFICACY

**>100**  
lm/W



CCT

**6500K**



CRI

**>80**

Applications: Study Table, Living Rooms, Shops, etc.

Bright light even during power cuts

### KEY FEATURES

### CUSTOMER BENEFITS

#### PRODUCT DESIGN & PERFORMANCE

Lumen Efficacy	High light output with low power consumption gives brighter light in dark areas.
UV Resistant Diffuser	Protect diffuser from getting yellowing in long run.
Selection of Electronic Components Based of Temp. Rating	Robust component due to which less failure since product is tested at 45 <sup>o</sup> ambient temperature.
Backup	2 Hrs (7W) & 5 Hrs (10W) with reduction in output lumens by 50% on battery backup.

#### SAFETY AND COMPLIANCES

FR Grade Housing Material	Plastic housing is fire proof, so there is low risk of fire hazard.
PTC (Positive Temperature Coefficient)	With PTC in place as the temperature increases the current for charging battery will reduce, which will keep the battery safe.
Double BMS Circuit	Protect the pbattery from getting over charge and over discharge, since lithium ion battery are very sensitive to voltage, & if not properly managed could cause serious safety issue.
CID (Current Interruption Device)	CID is activated when the pressure inside the battery exceeds the specified limit, CID, disconnects the battery from supply.

#### RELIABILITY

Wide Voltage Range: 120-330VAC	Operate without malfunctioning or decay/reduction in light output.
Lumen Maintenance	Better electronic components and heat management gives consistency in light output for long period of time.
Surge Protection: 3.5kV	Save product from electric surge during fault in supply transformer.
High Voltage	High voltage withstanding up-to 440V, to save the product from high voltage spikes continuously for 30 minutes.
Product Life >25,000 Burning Hrs.	Calculated based on the standard temperature conditions.
LED	LM80 tested LED's are used which gives long life and better reliability, LED's color does not change overtime.

Wattage	CCT	Cut Out Dimension (mm)	Product Dimension (mm)	Lumen Output	Product Code	MRP (₹)	PKG STD
<b>LED SPOT LIGHT</b>							
2W	2700K	Ø 33	41.6x16.5	108	PSPM01022	180	50
	6000K	Ø 33	41.6x16.5	120	PSPM01026	180	50
	Red	Ø 33	41.6x16.5	NA	PSPM0102R	300	50
	Green	Ø 33	41.6x16.5	NA	PSPM0102G	300	50
	Blue	Ø 33	41.6x16.5	NA	PSPM0102B	300	50
<b>LED EMERGENCY BULB</b>							
7W	6500K	NA	65x123	700	PBUM13077	600	10
10W	6500K	NA	75x139	950	PBUM13107	750	10
<b>LED MOTION SENSOR BULB</b>							
7W	6500K	NA	60x125	470	PBUM10077	560	30
<b>LED RADAR BULB</b>							
9W	6500K	NA	60x116	900	PBUM28097	700	10
<b>LED RGB BULB</b>							
7W	RGB	NA	60x114	NA	PBUM11070	750	30
<b>LED T - FLEXI BULB</b>							
10W	6500K	NA	201x30x100	1000	PBUM23107	280	30
<b>KIGLO HYPER : HW BULB</b>							
30W	6500K	NA	115x220	2400	PBUM04307	875	10
40W	6500K	NA	135x255	3400	PBUM04407	1075	10
50W	6500K	NA	135x255	4200	PBUM04507	1275	10
30W	6500K	NA	100x185	3000	PBUM04307R1	875	10
40W	6500K	NA	118x210	4000	PBUM04407R1	1075	10
50W	6500K	NA	138x243	5000	PBUM04507R1	1275	10
30W	3000K	NA	100x156	2700	PBUM04303R2	875	10
30W	6500K	NA	100x156	3000	PBUM04307R2	875	10
40W	3000K	NA	118x177	3600	PBUM04403R2	1075	10
40W	6500K	NA	118x177	4000	PBUM04407R2	1075	10
50W	3000K	NA	138x205	4500	PBUM04503R2	1275	10
50W	6500K	NA	138x205	5000	PBUM04507R2	1275	10
<b>KIGLO HYPER : HW BULB - ROCKET SHAPE</b>							
30W	6500K	NA	95x203	3000	PBUM26307	1250	10
40W	6500K	NA	105x233	4000	PBUM26407	1635	10
50W	6500K	NA	105x253	5000	PBUM26507	2025	10
<b>SMART WIFI</b>							
9W	NA	NA	Ø65x116	NA	PBUM27090	1650	20
<b>CANDLE LIGHT LAMP B22</b>							
4W	3000K	NA	38x107	360	PBUM39043	170	20
4W	6500K	NA	38x107	400	PBUM39047	170	20
<b>CANDLE LIGHT LAMP E27</b>							
4W	3000K	NA	38x107	360	PBUM38043	170	20
4W	6500K	NA	38x107	400	PBUM38047	170	20
<b>CANDLE LIGHT LAMP</b>							
4W	3000K	NA	38x107	360	PBUM15043	170	20
4W	6500K	NA	38x107	400	PBUM15047	170	20

Wattage	CCT	Cut Out Dimension (mm)	Product Dimension (mm)	Lumen Output	Product Code	MRP (₹)	PKG STD
<b>NIGHT LAMP</b>							
0.5W	Blue	NA	45x70	NA	92853BU	55	60
0.5W	Green	NA	45x70	NA	92853GN	55	60
0.5W	Red	NA	45x70	NA	92853RD	55	60
0.5W	White	NA	45x70	NA	92853WH	55	60
0.5W	Yellow	NA	45x70	NA	92853YW	55	60
0.5W	Orange	NA	45x70	NA	92853OR	55	60
0.5W	Pink	NA	45x70	NA	92853PN	55	60
<b>PENDANT LAMP</b>							
26W	6500K	NA	Ø310x84	2340	PBUM20267	2500	6
26W	6500K	NA	Ø310x84	2340	PBUM25267	1998	6
<b>BULK HEAD</b>							
12W	3000K	NA	233x107x50	972	PBHM02123	900	10
12W	6500K	NA	233x107x50	1080	PBHM02127	900	10
<b>DESK LAMP</b>							
5W	4000K	NA	90x108x400	150 (Dimmable)	PDEM01054R1	2400	5
5W	3000K/4000K/5000K	NA	72x57x265	150 (Dimmable)	PDEM03050WH	3000	5
<b>KIGLO OMNI BULB : E27 HOLDER</b>							
3W	3000K	NA	50x94	270	PBUM18033	130	50
3W	6500K	NA	50x94	276	PBUM18037	130	50
5W	3000K	NA	57x101	450	PBUM18053	140	50
5W	6500K	NA	57x101	500	PBUM18057	140	50
7W	3000K	NA	57x101	630	PBUM18073	150	50
7W	6500K	NA	57x101	700	PBUM18077	150	50
9W	3000K	NA	57x101	810	PBUM18093	170	50
9W	6500K	NA	57x101	900	PBUM18097	170	50
12W	3000K	NA	57x101	1080	PBUM18123	260	50
12W	6500K	NA	60x108	1200	PBUM18127	260	50t
<b>KIGLO OMNI BULB : B22 HOLDER</b>							
3W	3000K	NA	50x94	270	PBUM01033	130	50
3W	6500K	NA	50x94	276	PBUM01037	130	50
5W	3000K	NA	57x101	450	PBUM01053	140	50
5W	6500K	NA	57x101	500	PBUM01057	140	50
7W	3000K	NA	57x101	630	PBUM01073	150	50
7W	4000K	NA	57x101	665	PBUM01074	150	50
7W	6500K	NA	57x101	700	PBUM01077	150	50
9W	3000K	NA	57x101	810	PBUM01093	170	50
9W	4000K	NA	57x101	855	PBUM01094	170	50
9W	6500K	NA	57x101	900	PBUM01097	170	50
12W	3000K	NA	60x110	1080	PBUM01123	260	50
12W	4000K	NA	60x110	1049	PBUM01124	260	50
12W	6500K	NA	60x110	1104	PBUM01127	260	50
15W	3000K	NA	65x122	1350	PBUM01153	290	30
15W	6500K	NA	65x122	1380	PBUM01157	290	30
18W	3000K	NA	75x140	1656	PBUM01183	360	30

Wattage	CCT	Cut Out Dimension (mm)	Product Dimension (mm)	Lumen Output	Product Code	MRP (₹)	PKG STD
<b>KIGLO OMNI BULB : B22 HOLDER</b>							
18W	6500K	NA	75x140	1800	PBUM01187	360	30
23W	3000K	NA	80x154	2070	PBUM01233	550	20
23W	6500K	NA	80x154	2300	PBUM01237	550	20
26W	6500K	NA	95x184	2600	PBUM01267	575	20
3W	6500K	NA	50x94	315	PBUM01037R1	140	50
5W	6500K	NA	57x101	525	PBUM01057R1	150	50
7W	6500K	NA	57x101	735	PBUM01077R1	160	50
9W	6500K	NA	57x101	945	PBUM01097R1	180	50
12W	6500K	NA	60x110	1260	PBUM01127R1	280	50
15W	6500K	NA	65x122	1575	PBUM01157R1	310	30
18W	6500K	NA	75x140	1890	PBUM01187R1	370	30
23W	6500K	NA	80x154	2415	PBUM01237R1	560	20
<b>IGNITOS MODAN : PANEL LIGHT CIRCULAR</b>							
3W	3000K	Ø75	85x12	159	PPAM05033	375	10
3W	4000K	Ø75	85x12	170	PPAM05034	375	10
3W	6000K	Ø75	85x12	180	PPAM05036	375	10
6W	3000K	Ø109	120x12	317	PPAM05063	520	10
6W	4000K	Ø109	120x12	342	PPAM05064	520	10
6W	6000K	Ø109	120x12	360	PPAM05066	520	10
9W	3000K	Ø136	150x12	475	PPAM05093	595	10
9W	4000K	Ø136	150x12	515	PPAM05094	595	10
9W	6000K	Ø136	150x12	540	PPAM05096	595	10
12W	3000K	Ø136	150x12	686	PPAM05123	660	10
12W	4000K	Ø136	150x12	741	PPAM05124	660	10
12W	6000K	Ø136	150x12	780	PPAM05126	660	10
15W	3000K	Ø158	170x12	924	PPAM05153	745	10
15W	4000K	Ø158	170x12	998	PPAM05154	745	10
15W	6000K	Ø158	170x12	1050	PPAM05156	745	10
18W	3000K	Ø186	200x12	1109	PPAM05183	880	10
18W	4000K	Ø186	200x12	1198	PPAM05184	880	10
18W	6000K	Ø186	200x12	1260	PPAM05186	880	10
<b>IGNITOS MODAN : PANEL LIGHT SQUARE</b>							
3W	3000K	Ø75x75	85x85x12	159	PPAM06033	375	10
3W	4000K	Ø75x75	85x85x12	170	PPAM06034	375	10
3W	6000K	Ø75x75	85x85x12	180	PPAM06036	375	10
6W	3000K	Ø109x109	120x120x12	317	PPAM06063	520	10
6W	4000K	Ø109x109	120x120x12	342	PPAM06064	520	10
6W	6000K	Ø109x109	120x120x12	360	PPAM06066	520	10
9W	3000K	Ø136x136	150x150x12	475	PPAM06093	595	10
9W	4000K	Ø136x136	150x150x12	515	PPAM06094	595	10
9W	6000K	Ø136x136	150x150x12	540	PPAM06096	595	10
12W	3000K	Ø136x136	150x150x12	686	PPAM06123	660	10
12W	4000K	Ø136x136	150x150x12	741	PPAM06124	660	10
12W	6000K	Ø136x136	150x150x12	780	PPAM06126	660	10

Wattage	CCT	Cut Out Dimension (mm)	Product Dimension (mm)	Lumen Output	Product Code	MRP (₹)	PKG STD
<b>IGNITOS MODAN : PANEL LIGHT SQUARE</b>							
15W	3000K	Ø158x158	170x170x12	924	PPAM06153	745	10
15W	4000K	Ø158x158	170x170x12	998	PPAM06154	745	10
15W	6000K	Ø158x158	170x170x12	1050	PPAM06156	745	10
18W	3000K	Ø186x186	200x200x12	1109	PPAM06183	880	10
18W	4000K	Ø186x186	200x200x12	1198	PPAM06184	880	10
18W	6000K	Ø186x186	200x200x12	1260	PPAM06186	880	10
<b>IGNITOS MODAN : STEP PANEL LIGHT - CIRCULAR</b>							
3W	3000K	Ø75	85x25	135	PPAM11033	600	10
3W	4000K	Ø75	85x25	150	PPAM11034	600	10
3W	6500K	Ø75	Ø85x25	150	PPAM11037	600	10
5W	3000K	Ø108	120x25	260	PPAM11053	700	10
5W	4000K	Ø108	120x25	270	PPAM11054	700	10
5W	6500K	Ø108	Ø120x25	275	PPAM11057	700	10
10W	3000K	Ø132	145x25	670	PPAM11103	900	10
10W	4000K	Ø132	145x25	700	PPAM11104	900	10
10W	6500K	Ø132	Ø145x25	700	PPAM11107	900	10
15W	3000K	Ø156	170 x 25	1000	PPAM11153	1000	10
15W	4000K	Ø156	170x25	1050	PPAM11154	1000	10
15W	6500K	Ø156	Ø170x25	1050	PPAM11157	1000	10
20W	3000K	Ø177	190x25	1340	PPAM11203	1200	10
20W	4000K	Ø177	190x25	1400	PPAM11204	1200	10
20W	6500K	Ø177	Ø190x25	1400	PPAM11207	1200	10
24W	3000K	Ø204	220x25	1584	PPAM11243	1600	10
24W	4000K	Ø204	220x25	1632	PPAM11244	1600	10
24W	6000K	Ø204	220x25	1680	PPAM11246	1600	10
<b>IGNITOS MODAN : STEP PANEL LIGHT - SQUARE</b>							
3W	3000K	75x75	85x85x25	135	PPAM12033	600	10
3W	4000K	75x75	85x85x25	150	PPAM12034	600	10
3W	6500K	75x75	85x85x25	150	PPAM12037	600	10
5W	3000K	108x108	120x120x25	260	PPAM12053	700	10
5W	4000K	108x108	120x120x25	270	PPAM12054	700	10
5W	6500K	108x108	120x12x25	275	PPAM12057	700	10
10W	3000K	132x132	145x145x25	670	PPAM12103	900	10
10W	4000K	132x132	145x145x25	700	PPAM12104	900	10
10W	6500K	132x132	145x145x25	700	PPAM12107	900	10
15W	3000K	156x156	170x170x25	1000	PPAM12153	1000	10
15W	4000K	156x156	170x170x25	1050	PPAM12154	1000	10
15W	6500K	156x156	170x170x25	1050	PPAM12156	1000	10
20W	3000K	177x177	190x190x25	1340	PPAM12203	1200	10
20W	4000K	177x177	190x190x25	1400	PPAM12204	1200	10
20W	6500K	177x177	190x190x25	1400	PPAM12206	1200	10
24W	3000K	204x204	220x220x25	1584	PPAM12243	1600	10
24W	4000K	204x204	220x220x25	1632	PPAM12244	1600	10
24W	6500K	204x204	220x220x25	1680	PPAM12246	1600	10



Wattage	CCT	Cut Out Dimension (mm)	Product Dimension (mm)	Lumen Output	Product Code	MRP (₹)	PKG STD
<b>CAMBER MODAN : SURFACE DOWN LIGHT SQUARE</b>							
5W	3000K	NA	120x120x35	300	PDLM11053	750	10
5W	4000K	NA	120x120x35	320	PDLM11054	750	10
5W	6000K	NA	120x120x35	320	PDLM11056	750	10
10W	3000K	NA	120x120x35	660	PDLM11103	1050	10
10W	4000K	NA	120x120x35	700	PDLM11104	1050	10
10W	6000K	NA	120x120x35	700	PDLM11106	1050	10
15W	3000K	NA	170x170x35	1080	PDLM11153	1250	10
15W	4000K	NA	170x170x35	1140	PDLM11154	1250	10
15W	6000K	NA	170x170x35	1140	PDLM11156	1250	10
20W	3000K	NA	225x225x35	1480	PDLM11203	1750	10
20W	4000K	NA	225x225x35	1560	PDLM11204	1750	10
20W	6000K	NA	225x225x35	1560	PDLM11206	1750	10
<b>CONCEAL BOX DOWN LIGHT</b>							
5W	3000K	Ø75	110x55	360	PDLM15053	400	20
5W	4000K	Ø75	110x55	380	PDLM15054	400	20
5W	6500K	Ø75	110x55	400	PDLM15057	400	20
5W	Red	Ø75	110x55	NA	PDLM1505R	400	20
5W	Green	Ø75	110x55	NA	PDLM1505G	400	20
5W	Blue	Ø75	110x55	NA	PDLM1505B	400	20
7W	3000K	Ø85	105x60	505	PDLM15073	425	20
7W	6500K	Ø85	105x60	560	PDLM15077	425	20
7W	Red	Ø85	105x60	NA	PDLM1507R	425	20
7W	Green	Ø85	105x60	NA	PDLM1507G	425	20
7W	Blue	Ø85	105x60	NA	PDLM1507B	425	20
9W	3000K	Ø85	105x60	650	PDLM15093	450	20
9W	6500K	Ø85	105x60	720	PDLM15097	450	20
9W	Red	Ø85	105x60	NA	PDLM1509R	450	20
9W	Green	Ø85	105x60	NA	PDLM1509G	450	20
9W	Blue	Ø85	105x60	NA	PDLM1509B	450	20
<b>MINI SURFACE DOWN LIGHT (CABINET LIGHT)</b>							
	3000K	NA	68x13.5	150	PDLM28033	199	50
	6500K	NA	68x13.5	165	PDLM28037	199	50
3W	Red	NA	68x13.5	NA	PDLM2803R	199	50
	Green	NA	68x13.5	NA	PDLM2803G	199	50
	Blue	NA	68x13.5	NA	PDLM2803B	199	50
<b>SWIVEL DOWN LIGHT</b>							
3W	3000K	Ø70	95x42	195	PDLM29033	475	30
3W	6500K	Ø70	95x42	210	PDLM29037	475	30
6W	3000K	Ø90	116x51	390	PDLM29063	675	30
6W	6500K	Ø90	116x51	420	PDLM29067	675	30
<b>JUNCTION BOX DOWN LIGHT</b>							
3W	3000K	Ø46	80x33	210	PDLM16033R1	265	50
3W	6500K	Ø46	80x33	225	PDLM16037R1	265	50
3W	Red	Ø46	80x33	NA	PDLM1703RR1	265	50

Wattage	CCT	Cut Out Dimension (mm)	Product Dimension (mm)	Lumen Output	Product Code	MRP (₹)	PKG STD
<b>JUNCTION BOX DOWN LIGHT</b>							
3W	Green	Ø46	80x33	NA	PDLM1703GR1	265	50
3W	Blue	Ø46	80x33	NA	PDLM1703BR1	265	50
3W	Pink	Ø46	80x33	NA	PDLM1703PR1	265	50
7W	3000K	Ø80	100x60	640	PDLM14073	795	10
7W	4000K	Ø80	100x60	670	PDLM14074	795	10
7W	6000K	Ø80	100x60	700	PDLM14076	795	10
9W	3000K	Ø80	100x60	830	PDLM14093	1095	10
9W	4000K	Ø80	100x60	860	PDLM14094	1095	10
<b>COB DOWN LIGHT - 360</b>							
9W	6000K	Ø80	100x60	900	PDLM14096	1095	10
12W	3000K	Ø95	120x68	1100	PDLM14123	1295	10
12W	4000K	Ø95	120x68	1150	PDLM14124	1295	10
12W	6000K	Ø95	120x68	1200	PDLM14126	1295	10
15W	3000K	Ø95	120x68	1380	PDLM14153	1495	10
15W	4000K	Ø95	120x68	1440	PDLM14154	1495	10
15W	6000K	Ø95	120x68	1500	PDLM14156	1495	10
18W	3000K	Ø135	170x100	1768	PDLM14183	1995	10
18W	4000K	Ø135	170x100	1805	PDLM14184	1995	10
18W	6000K	Ø135	170x100	1905	PDLM14186	1995	10
24W	3000K	Ø135	170x100	2357	PDLM14243	2495	10
24W	4000K	Ø135	170x100	2395	PDLM14244	2495	10
24W	6000K	Ø135	170x100	2450	PDLM14246	2495	10
<b>RIMLESS SURFACE DOWN LIGHT - CIRCULAR</b>							
12W	3000K	NA	121x27	920	PPAM16123	1175	20
12W	4000K	NA	121x27	960	PPAM16124	1175	20
12W	6500K	NA	121x27	1000	PPAM16127	1175	20
18W	3000K	NA	156x27	1382	PPAM16183	1375	20
18W	4000K	NA	156x27	1440	PPAM16184	1375	20
18W	6500K	NA	156x27	1500	PPAM16187	1375	20
24W	3000K	NA	191x27	1843	PPAM16243	1775	20
24W	4000K	NA	191x27	1920	PPAM16244	1775	20
24W	6500K	NA	191x27	2000	PPAM16247	1775	20
<b>RIMLESS SURFACE DOWN LIGHT - SQUARE</b>							
12W	3000K	NA	121x121x27	920	PPAM17123	1175	20
12W	4000K	NA	121x121x27	960	PPAM17124	1175	20
12W	6500K	NA	121x121x27	1000	PPAM17127	1175	20
18W	3000K	NA	156x156x27	1382	PPAM17183	1375	20
18W	4000K	NA	156x156x27	1440	PPAM17184	1375	20
18W	6500K	NA	156x156x27	1500	PPAM17187	1375	20
24W	3000K	NA	191x191x27	1843	PPAM17243	1775	20
24W	4000K	NA	191x191x27	1920	PPAM17244	1775	20
24W	6500K	NA	191x191x27	2000	PPAM17247	1775	20

Wattage	CCT	Cut Out Dimension (mm)	Product Dimension (mm)	Lumen Output	Product Code	MRP (₹)	PKG STD
<b>RIMLESS RECESSED DOWN LIGHT - CIRCULAR</b>							
10W	3000K	Ø70	93x37	920	PPAM19103	1000	20
10W	4000K	Ø70	93x37	960	PPAM19104	1000	20
10W	6500K	Ø70	93x37	1000	PPAM19107	1000	20
15W	3000K	Ø95	120x37	1382	PPAM19153	1200	20
15W	4000K	Ø95	120x37	1440	PPAM19154	1200	20
15W	6500K	Ø95	120x37	1500	PPAM19157	1200	20
20W	3000K	Ø142	170x37	1843	PPAM19203	1550	20
20W	4000K	Ø142	170x37	1920	PPAM19204	1550	20
20W	6500K	Ø142	170x 37	2000	PPAM19207	1550	20
<b>RIMLESS RECESSED DOWN LIGHT - SQUARE</b>							
10W	3000K	70x70	93x93x37	920	PPAM18103	1000	20
10W	4000K	70x70	93x93x37	960	PPAM18104	1000	20
10W	6500K	70x70	93x93x37	1000	PPAM18107	1000	20
15W	3000K	95x95	120x120x37	1382	PPAM18153	1200	20
15W	4000K	95x95	120x120x37	1440	PPAM18154	1200	20
15W	6500K	95x95	120x120x37	1500	PPAM18157	1200	20
20W	3000K	142x142	170x170x37	1843	PPAM18203	1550	20
20W	4000K	142x142	170x170x37	1920	PPAM18204	1550	20
20W	6500K	142x142	170x170x37	2000	PPAM18207	1550	20
<b>DECO SURFACE CEILING LIGHT</b>							
22W	3000K	NA	300x78	1683	PCLM02223	1250	6
22W	6500K	NA	300x78	1870	PCLM02227	1250	6
<b>LED MODULAR SURFACE DOWNLIGHT</b>							
7W	3000K	NA	85x48	630	PDLM22073	650	10
7W	4000K	NA	85x48	665	PDLM22074	650	10
7W	6500K	NA	85x48	700	PDLM22077	650	10
9W	3000K	NA	110x48	810	PDLM22093	750	10
9W	4000K	NA	110x48	855	PDLM22094	750	10
9W	6500K	NA	110x48	900	PDLM22097	750	10
9W	Red	NA	Ø110x48	NA	PDLM2209R	750	10
9W	Green	NA	Ø110x48	NA	PDLM2209G	750	10
9W	Blue	NA	Ø110x48	NA	PDLM2209B	750	10
9W	Pink	NA	Ø110x48	NA	PDLM2209P	750	10
15W	3000K	NA	135x48	1350	PDLM22153	950	10
15W	4000K	NA	135x48	1425	PDLM22154	950	10
15W	6500K	NA	135x48	1500	PDLM22157	950	10
<b>ALTABRIGHT : BATTEN LIGHT</b>							
5W	3000K	NA	290x22x34	450	PBTM01053	280	10
5W	6500K	NA	290x22x34	500	PBTM01057	280	10
10W	3000K	NA	590x22x34	900	PBTM01103	375	10
10W	6500K	NA	590x22x34	1000	PBTM01107	375	10
20W	3000K	NA	1150x25x35	1800	PBTM01203	560	20
20W	6500K	NA	1150x25x35	2000	PBTM01207	560	20

Wattage	CCT	Cut Out Dimension (mm)	Product Dimension (mm)	Lumen Output	Product Code	MRP (₹)	PKG STD
<b>ALTABRIGHT : SQUARE BATTEN LIGHT</b>							
5W	3000K	NA	280x23x37	460	PBTM02053	280	10
5W	6500K	NA	280x23x37	500	PBTM02057	280	10
10W	3000K	NA	580x23x37	920	PBTM02103	375	10
10W	6500K	NA	580x23x37	1000	PBTM02107	375	10
20W	3000K	NA	1140x23x37	1800	PBTM02203	560	20
20W	6500K	NA	1140x23x37	2000	PBTM02207	560	20
<b>ALTABRIGHT : OVAL BATTEN LIGHT</b>							
24W	3000K	NA	1150x25x35	2160	PBTM06243	630	20
24W	4000K	NA	1150x25x35	2400	PBTM06244	630	20
24W	6500K	NA	1150x25x35	2640	PBTM06247	630	20
<b>ALTABRIGHT : RADAR BATTEN LIGHT</b>							
20W	6500K	NA	1210x36x25	2000	PBTM07207	1750	10
<b>ALTABRIGHT : CURVY BATTEN LIGHT</b>							
22W	3000K	NA	1139x32x36.5	1980	PBTM13223	550	10
22W	6500K	NA	1139x32x36.5	2200	PBTM13227	550	10
26W	3000K	NA	1179x32x36.5	2340	PBTM14263	750	10
26W	6500K	NA	1179x32x36.5	2600	PBTM14267	750	10
<b>ALTABRIGHT : HW ALUMINIUM BATTEN LIGHT</b>							
36W	6500K	NA	1175x30x36	3600	PBTM08367	1225	20
<b>ALTABRIGHT : NIGHT GLOW BATTEN LIGHT</b>							
22W+2W	6500K	NA	1191x32.1x36.6	2200	PBTM14227	875	10
<b>20W BATTEN RGB</b>							
20W	Red	NA	1140x23x37	NA	PBTM0220R	575	20
20W	Green	NA	1140x23x37	NA	PBTM0220G	575	20
20W	Blue	NA	1140x23x37	NA	PBTM0220B	575	20
<b>LED STREET LIGHT</b>							
15W	6500K	NA	270x80x66	1500	PSTM01157	2120	10
25W	6000K	NA	330x80x70	2500	PSTM01257	3045	10
45W	6000K	NA	330x80x70	4500	PSTM01457	4710	10
<b>LED STREET LIGHT HW</b>							
60W	6500K	NA	410x121x80	6000	PSTM01607	6800	4
75W	6500K	NA	410x121x80	7500	PSTM01757	8500	4
<b>LED STREET LIGHT NEW</b>							
15W	3000K	NA	284x115x55	1350	PSTM23153	1900	10
15W	6500K	NA	284x115x55	1500	PSTM23157	1900	10
25W	3000K	NA	284x115x55	2250	PSTM23253	2100	10
25W	6500K	NA	284x115x55	2500	PSTM23257	2100	10
45W	3000K	NA	353x137x55	4050	PSTM23453	2750	10
45W	6500K	NA	353x137x55	4500	PSTM23457	2750	10
60W	3000K	NA	478x178x64	5400	PSTM23603	5850	4
60W	6500K	NA	478x178x64	6000	PSTM23607	5850	4
75W	3000K	NA	478x178x64	6750	PSTM23753	6350	4
75W	6500K	NA	478x178x64	7500	PSTM23757	6350	4



Wattage	CCT	Cut Out Dimension (mm)	Product Dimension (mm)	Lumen Output	Product Code	MRP (₹)	PKG STD
<b>LED FLOOD LIGHT</b>							
10W	3000K	NA	125x110x36	900	PFLM17103	950	10
10W	6500K	NA	125x110x36	1000	PFLM17107	950	10
20W	3000K	NA	145x125x40	1800	PFLM17203	1400	10
20W	6500K	NA	145x125x40	2000	PFLM17207	1400	10
30W	3000K	NA	195x165x46	2700	PFLM17303	2000	10
30W	6500K	NA	195x165x46	3000	PFLM17307	2000	10
50W	3000K	NA	230x195x58	4500	PFLM17503	2500	5
50W	6500K	NA	230x195x58	5000	PFLM17507	2500	5
<b>LED FLOOD LIGHT</b>							
100W	3000K	NA	250x195x60	9000	PFLM17AB3	4400	1
100W	6500K	NA	250x195x60	10000	PFLM17AB7	4400	1
<b>LED FLOOD LIGHT NEW</b>							
10W	5700K	NA	150x125x30	900	PFLM07108	1200	20
20W	5700K	NA	172x140x31	1800	PFLM07208	2000	10
30W	5700K	NA	172x140x31	2700	PFLM07308	3000	10
50W	5700K	NA	222x185x37	4500	PFLM07508	4000	5
70W	5700K	NA	285x215x48	6300	PFLM07708	7500	5
<b>LED BASE LIGHT</b>							
36W	3000K	Ø565x565	565x565x30	2916	PBLM13363	3300	1
36W	4000K	Ø565x565	565x565x30	3078	PBLM13364	3300	1
36W	6500K	Ø565x565	565x565x30	3240	PBLM13367	3300	1
<b>LED STRIP LIGHT IP20 - 60 LED/M</b>							
25W	3000K	NA	5000x8x2	72 lm/W	PSLM06253	850	10
25W	4000K	NA	5000x8x2	76 lm/W	PSLM06254	850	10
25W	6500K	NA	5000x8x2	80 lm/W	PSLM06257	850	10
25W	Red	NA	5000x8x2	NA	PSLM0625R	950	10
25W	Green	NA	5000x8x2	NA	PSLM0625G	950	10
25W	Blue	NA	5000x8x2	NA	PSLM0625B	950	10
50W	RGB	NA	5000x10x2	NA	PSLM06500	2000	10

Wattage	CCT	Cut Out Dimension (mm)	Product Dimension (mm)	Lumen Output	Product Code	MRP (₹)	PKG STD
<b>LED STRIP LIGHT IP20 - NEW SERIES - 180 LED/M</b>							
90W	3000K	NA	5000x8x2	72 lm/W	PSLM14903	1500	10
90W	4000K	NA	5000x8x2	76 lm/W	PSLM14904	1500	10
90W	6500K	NA	5000x8x2	80 lm/W	PSLM14907	1500	10
90W	Red	NA	5000x8x2	NA	PSLM1490R	1500	10
90W	Green	NA	5000x8x2	NA	PSLM1490G	1500	10
90W	Blue	NA	5000x8x2	NA	PSLM1490B	1500	10
<b>LED STRIP LIGHT IP65 - 60 LED/M</b>							
25W	3000K	NA	5000x10x4	72 lm/W	PSLM07253	1250	10
25W	4000K	NA	5000x10x4	76 lm/W	PSLM07254	1250	10
25W	6500K	NA	5000x10x4	80 lm/W	PSLM07257	1250	10
25W	Red	NA	5000x10x4	NA	PSLM0725R	1350	10
25W	Green	NA	5000x10x4	NA	PSLM0725G	1350	10
25W	Blue	NA	5000x10x4	NA	PSLM0725B	1350	10
<b>STRIP LIGHT DRIVER</b>							
24W	NA	NA	104x35.5x31.5	NA	PSLOS2401	400	10
<b>PC FRAME - CIRCULAR</b>							
5W	NA	NA	120x35	NA	PFMM01050	100	10
10W	NA	NA	170x35	NA	PFMM01100	125	10
20W	NA	NA	220x35	NA	PFMM01200	200	10
<b>PC FRAME - SQUARE</b>							
5W	NA	NA	120x120x35	NA	PFMM02050	100	10
10W	NA	NA	170x170x35	NA	PFMM02100	125	10
20W	NA	NA	220x220x35	NA	PFMM02200	200	10

## **Panasonic Life Solutions India Pvt. Ltd.**

3rd Floor, B Wing, I-Think Techno Campus,  
Pokharan Road No. 2, Thane (W), Thane - 400 607, Maharashtra.  
Customer Care no. : 022-41304130  
Email: [wecare@in.panasonic.com](mailto:wecare@in.panasonic.com)  
[www.lsin.panasonic.com](http://www.lsin.panasonic.com)

# **Panasonic**

All Rights Reserved © 2015 COPYRIGHT Panasonic Life Solutions India Pvt. Ltd.  
Specifications are subject to change without notice  
Printed in India

The duplication and transfer of images from this catalogue without permission is strictly prohibited.