



PRICE LIST

Ref No. RRKL/LP/BCISI/10/21
w.e.f. 22nd October 2021

THE ONLY INDIAN
WIRE BRAND
TRUSTED BY

85+

COUNTRIES
GLOBALLY



RR KÄBEL
WIRES & CABLES

**AKALMAND BANO,
SAHI CHUNO.**

AKALMAND BANO, SAHI CHUNO.



BUILDING WIRES

RR KÄBEL
WIRES & CABLES

INDIA'S ONLY WIRE WITH
REACH • RoHS
CE • CPR Compliant



SUPEREX FR

FR PVC Insulated Single Core Cables



RR Kabel make single core unsheathed Multistrand High Conductivity plain annealed Copper, FR PVC Insulated Industrial Cables in voltage grade upto and including 1100 Volts, as per IS 694 (HSN Code: 8544)

| Size (Sq.mm) | Configuration | Rate/90 mtr | No. of Coils packed in an Outer Box |
|--------------|---------------|-------------|-------------------------------------|
| 0.75 | 24/0.2 | 1258 | 24 |
| 1.0 | 14/0.3 | 1709 | 20 |
| 1.5 | 22/0.3 | 2491 | 12 |
| 2.5 | 36/0.3 | 3978 | 12 |
| 4.0 | 56/0.3 | 5800 | 8 |
| 6.0 | 84/0.3 | 8639 | 4 |
| 10.0 | 140/0.3 | 15848 | 3 |
| 16.0 | 126/0.4 | 25451 | 2 |

UNILAY HR FR

HR FR PVC Insulated Single Core Cables



RR Kabel make single core unsheathed Multistrand Flexible High Conductivity plain annealed Copper, HR FR PVC Insulated Industrial Cables in voltage grade upto and including 1100 Volts, as per IS 694 (HSN Code: 8544)

| Size (Sq.mm) | Configuration | Rate/90 mtr | No. of Coils packed in an Outer Box |
|--------------|---------------|-------------|-------------------------------------|
| 1.0 | 37/0.19 | 1802 | 20 |
| 1.5 | 37/0.23 | 2615 | 12 |
| 2.5 | 61/0.23 | 4188 | 12 |
| 4.0 | 61/0.29 | 6390 | 8 |
| 6.0 | 91/0.29 | 9499 | 8 |

FLAMEX FR-LSH

FR-LSH PVC Insulated Single Core Cables



RR Kabel make single core unsheathed Multistrand High Conductivity plain annealed Copper, FR-LSH PVC Insulated Industrial Cables in voltage grade upto and including 1100 Volts, as per IS 694 (HSN Code: 8544)

| Size (Sq.mm) | Configuration | Rate/90 mtr | No. of Coils packed in an Outer Box |
|--------------|---------------|-------------|-------------------------------------|
| 1.0 | 14/0.3 | 1784 | 20 |
| 1.5 | 22/0.3 | 2616 | 12 |
| 2.5 | 36/0.3 | 4170 | 12 |
| 4.0 | 56/0.3 | 6089 | 8 |
| 6.0 | 84/0.3 | 9041 | 4 |

FIREX LSOH

HALOGEN FREE FLAME RETARDANT 90 °C, CROSSLINKED



RR KABEL make single core unsheathed Multistrand High Conductivity plain annealed Copper, Cross linked Halogen Free Flame Retardant(HFFR) 90 °C Insulated Industrial Cables in voltage grade upto and including 1100 Volts, as per IS 17048 (HSN Code: 8544)

| Size (Sq.mm) | Configuration | Rate/90 mtr | No. of Coils packed in an Outer Box |
|--------------|---------------|-------------|-------------------------------------|
| 1.00 | 14/0.3 | 2138 | 20 |
| 1.50 | 22/0.3 | 3041 | 12 |
| 2.50 | 36/0.3 | 4805 | 12 |
| 4.00 | 56/0.3 | 7191 | 8 |
| 6.00 | 84/0.3 | 10416 | 4 |

*FIREX LSOH – Insulation conforming to HFI XL 90 as per IS 17048


RR KABEL FR / FR-LSH / LSOH



RR KABEL make single core unsheathed Multistrand High Conductivity plain annealed Copper, FR PVC / FR-LSH PVC / Thermoplastic Halogen Free Flame Retardant (HFFR) 70 °C Insulated Industrial Cables in voltage grade upto and including 1100 Volts (HSN Code: 8544)

| Size (Sq.mm) | Configuration | AMPS | RATE / 200 MTR | | |
|--------------|---------------|------|---|---|--|
| | | | RR KABEL FR FR PVC INSULATION As Per IS 694 | RR KABEL FR-LSH FR-LSH PVC INSULATION As Per IS 694 | RR KABEL LSOH Thermoplastic Halogen Free Flame Retardant (HFFR) 70 °C Insulation As Per IS 17048 |
| 0.75 | 24/0.2 | 8 | 2812 | 2910 | 3290 |
| 1.0 | 32/0.2 | 13 | 3707 | 3837 | 4189 |
| 1.5 | 30/0.25 | 17 | 5411 | 5601 | 5952 |
| 2.5 | 50/0.25 | 24 | 8816 | 9124 | 9606 |
| 4.0 | 56/0.3 | 30 | 13352 | 13819 | 14581 |
| 6.0 | 84/0.3 | 38 | 19851 | 20498 | 21627 |

*RR KABEL LSOH – Insulation conforming to HFI TP 70 as per IS 17048

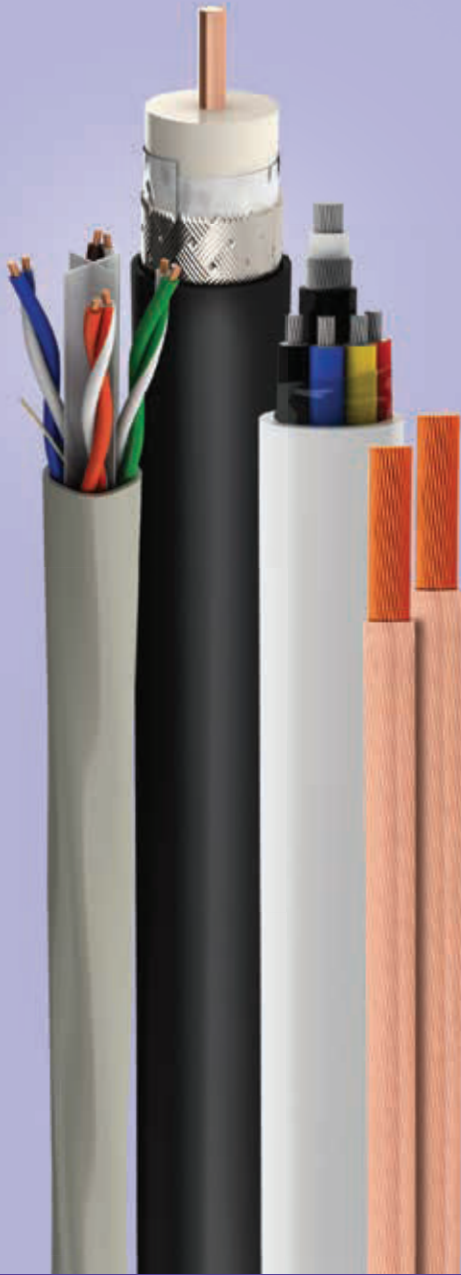

COMMUNICATION CABLES

RR KĀBEL
WIRES & CABLES

- RATNA CO-X
- RATNA LAN
- RATNA COM
- CCTV CAMERA CABLE
- SPEAKER CABLE

RATNA CO-X



RR Kabel make Electrolytic grade solid annealed bare copper conductor gas injected physical polyethylene foam insulated, wrapped with Aluminium Mylar tape and Al alloy wire braided, Jelly flooded and PVC Jacketing in Black Colour, Co-Axial Industrial Cables. (HSN Code : 8544)

| RG 59 F | | RG 6 F | | RG 11 F | |
|---------|----------|---------|----------|---------|----------|
| 90 Mtr. | 305 Mtr. | 90 Mtr. | 305 Mtr. | 90 Mtr. | 305 Mtr. |
| 1986 | 6730 | 2538 | 8601 | 5655 | 19164 |

RATNA LAN



RR Kabel make Solid bare copper conductor 4 Pair unshielded twisted pair (UTP) Industrial cables for Computer Lan Network with Grey colour & FR PVC Jacket. (HSN Code : 8544)

| CAT 5e | | CAT 6 | |
|----------|----------|----------|----------|
| 100 Mtr. | 305 Mtr. | 100 Mtr. | 305 Mtr. |
| 3198 | 9755 | 4278 | 13046 |

RATNA COM



RR Kabel make Solid Electrolytic annealed bare copper conductor Industrial Switchboard & Telephone Cables with high density polyethylene insulation, paired, polyester taped, Nylon Rip Cord and Grey colour sheathed with FR PVC, generally conform to "ITD specification S/WS 113 C" (HSN Code : 8544). (Rate/90 Mtr Coil)

| Dia | 1 Pair | 2 Pair | 3 Pair | 4 Pair | 5 Pair | 10 Pair | 20 Pair |
|--------|--------|--------|--------|--------|--------|---------|---------|
| 0.5 mm | 876 | 1541 | 2272 | 2977 | 3708 | 7081 | 13447 |

CCTV CAMERA CABLES



RR Kabel make Annealed Tinned copper conductor, PE Insulated, ATC Braided, Polyester tape screened, PVC outer sheathed Industrial CCTV Camera Cables.(HSN CODE : 8544)

| Size | Packing | Rate Per Coil | No. of Coils packed in an Outer Box |
|-------|---------|---------------|-------------------------------------|
| 3 + 1 | 90 Mtr. | 3741 | 3 |
| 4 + 1 | 90 Mtr. | 4193 | 3 |

SPEAKER CABLES



RR Kabel make Multistrand Annealed bare copper conductor, PVC Insulated Industrial Speaker wires. (HSN CODE : 8544)

| Size | Packing | Rate Per Coil | No. of Coils packed in an Outer Box |
|-----------|---------|---------------|-------------------------------------|
| 2C x 0.50 | 90 Mtr. | 1752 | 10 |
| 2C x 0.75 | 90 Mtr. | 2498 | 10 |
| 2C x 1.0 | 90 Mtr. | 3152 | 8 |
| 2C x 1.5 | 90 Mtr. | 4544 | 8 |
| 2C x 2.5 | 90 Mtr. | 7240 | 8 |

* 3% Extra for Transparent sheath



INDUSTRIAL CABLES

RR KÄBEL
WIRES & CABLES

- FLEXIBLE SINGLE CORE CABLE
- FLEXIBLE MULTICORE CABLES
- SHIELDED CABLE
- BRAIDED CABLE

RR KABEL FR / FR-LSH / LSOH



RR KABEL make single core unsheathed Multistrand High Conductivity plain annealed Copper, FR PVC / FR-LSH PVC / Thermoplastic Halogen Free Flame Retardant (HFFR) 70 °C Insulated Industrial Cables in voltage grade upto and including 1100 Volts (HSN Code: 8544)

| RATE / 100 MTR | | | | | |
|----------------|---------------|------|---|---|--|
| Size (Sq.mm) | Configuration | AMPS | RR KABEL FR FR PVC INSULATION As Per IS 694 | RR KABEL FR-LSH FR-LSH PVC INSULATION As Per IS 694 | RR KABEL LSOH Thermoplastic Halogen Free Flame Retardant (HFFR) 70 °C Insulation As Per IS 17048 |
| 10.0 | 140/0.3 | 52 | 17514 | 18128 | 19241 |
| 16.0 | 126/0.4 | 70 | 27726 | 28692 | 30307 |
| 25.0 | 196/0.4 | 88 | 44304 | 46077 | 49621 |
| 35.0 | 276/0.4 | 112 | 61973 | 64452 | 69410 |
| 50.0 | 396/0.4 | 146 | 87538 | 91039 | 98042 |
| 70.0 | 360/0.5 | 216 | 125249 | 130259 | 140279 |
| 95.0 | 480/0.5 | 262 | 168491 | 175230 | 188709 |
| 120.0 | 608/0.5 | 310 | 218013 | 226734 | 244175 |
| 150.0 | 750/0.5 | 355 | 270255 | 281065 | 302685 |
| 185.0 | 931/0.5 | 415 | 331871 | 345146 | 371696 |
| 240.0 | 1200/0.5 | 500 | 432407 | 449703 | 484296 |
| 300.0 | 1500/0.5 | 550 | 539819 | 561411 | 604597 |
| 400.0 * | 2013/0.5 | 590 | 747923 | 777840 | 837674 |
| 500.0 * | 2562/0.5 | 660 | 950840 | 988874 | 1064941 |
| 630.0 * | 3416/0.5 | 725 | 1263945 | 1314503 | 1415619 |

The item marked * are non stock items refer to marketing dept for delivery schedule MOQ packing etc.

*RR KABEL LSOH – Insulation conforming to HFI TP 70 as per IS 17048

RATNA FLEX SINGLE CORE



Multistrand bright electrolytic annealed bare copper conductor, PVC Insulated Unsheathed Single core round flexible Industrial Power Cables for working voltages upto and including 1100 Volts (HSN CODE : 8544)

| Size (Sq.mm) | Configuration | AMPS | Rate Per 100 Mtr |
|--------------|---------------|------|------------------|
| 0.5 | 16/0.2 | 5 | 992 |
| 0.75 | 24/0.2 | 8 | 1424 |
| 1.0 | 32/0.2 | 13 | 1846 |
| 1.5 | 30/0.25 | 17 | 2656 |
| 2.5 | 50/0.25 | 24 | 4293 |
| 4.0 | 56/0.3 | 30 | 6767 |
| 6.0 | 84/0.3 | 38 | 9979 |

RATNA FLEX MULTICORE CABLES



Multistrand bright electrolytic annealed bare copper conductor, PVC Insulated & PVC sheathed multicore round flexible Industrial Cables for working voltages upto and including 1100 Volts, as per IS 694 (HSN CODE : 8544)

| Rate per 100 meter | | | | | | | | | | | |
|--------------------|---------|------|--------|--------|--------|--------------|----------|------|--------|---------|---------|
| Size (Sq.mm) | CONFIG. | AMPS | 2 CORE | 3 CORE | 4 CORE | Size (Sq.mm) | CONFIG. | AMPS | 2 CORE | 3 CORE | 4 CORE |
| 0.5 | 16/0.2 | 5 | 2952 | 3846 | 4825 | 25.0 | 196/0.4 | 88 | 99619 | 141228 | 186071 |
| 0.75 | 24/0.2 | 8 | 3858 | 5148 | 6559 | 35.0 | 276/0.4 | 112 | - | 197221 | 261349 |
| 1.0 | 32/0.2 | 13 | 4696 | 6360 | 8142 | 50.0 | 396/0.4 | 146 | - | 281532 | 366633 |
| 1.5 | 30/0.25 | 17 | 6292 | 8694 | 11322 | 70.0 | 360/0.5 | 216 | - | 396094 | 522168 |
| 2.5 | 50/0.25 | 24 | 9960 | 13876 | 18226 | 95.0 | 480/0.5 | 262 | - | 529232 | 693936 |
| 4.0 | 56/0.3 | 30 | 15223 | 21456 | 28104 | 120.0 | 608/0.5 | 310 | - | 668129 | 884869 |
| 6.0 | 84/0.3 | 38 | 21842 | 31455 | 41388 | 150.0 | 750/0.5 | 355 | - | 848099 | 1112362 |
| 10.0 | 140/0.3 | 52 | 38963 | 55826 | 72746 | 185.0 | 931/0.5 | 415 | - | 1042132 | 1353281 |
| 16.0 | 126/0.4 | 70 | 60871 | 85967 | 113274 | 240.0 | 1200/0.5 | 500 | - | 1354398 | 1830207 |
| | | | | | | 300.0 | 1500/0.5 | 550 | - | 1689457 | 2286096 |

CONTROL CABLES



Multistrand bright electrolytic annealed bare copper conductor, PVC Insulated & PVC sheathed multicore round flexible Industrial Control Cables (JZ-500), Voltages Grade 300/500 V. (HSN CODE : 8544)

| Rate per 100 meter | | | | | | | | | | | | |
|--------------------|---------|------|----------|----------|----------|----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Size (Sq.mm) | CONFIG. | AMPS | 5 CORE * | 6 CORE * | 7 CORE * | 8 CORE * | 10 CORE * | 12 CORE * | 14 CORE * | 16 CORE * | 19 CORE * | 24 CORE * |
| 0.5 | 16/0.2 | 5 | 6435 | 7397 | 8244 | 9788 | 12145 | 14264 | 16523 | 18714 | 22083 | 28266 |
| 0.75 | 24/0.2 | 8 | 8777 | 10503 | 11659 | 13979 | 17095 | 20332 | 23612 | 27198 | 32792 | 41074 |
| 1.0 | 32/0.2 | 13 | 11153 | 12946 | 14601 | 17391 | 21882 | 25718 | 29837 | 33773 | 41640 | 51248 |
| 1.5 | 30/0.25 | 17 | 15446 | 18339 | 20977 | 24603 | 30512 | 36361 | 42332 | 47682 | 56417 | 72287 |
| 2.5 | 50/0.25 | 24 | 24619 | 29850 | 34201 | 39659 | 49969 | 58847 | 68373 | 78904 | 92949 | 117806 |
| 4.0 | 56/0.3 | 30 | 38235 | 46548 | 53779 | 63335 | 79924 | 94676 | 110264 | 125672 | 148462 | 189682 |
| 6.0 | 84/0.3 | 38 | 56437 | 69620 | 81139 | 92962 | 118784 | 140799 | 163213 | 185894 | 219359 | 279885 |
| 10.0 | 140/0.3 | 52 | 98292 | - | - | - | - | - | - | - | - | - |
| 16.0 | 126/0.4 | 70 | 153397 | - | - | - | - | - | - | - | - | - |

Loading factor for Different Insulation / Sheath * -

| FR Insulation | FR Sheath | FR-LSH / HR Insulation | FR-LSH / HR Sheath | LSOH Insulation | LSZH Sheath |
|---------------|-----------|------------------------|--------------------|-----------------|-------------|
| 5% | 5% | 10% | 10% | 35% | 25% |

The item marked * are non stock items, refer to marketing dept. for delivery schedule, MOQ, packing etc.

SUBMERSIBLE FLAT CABLES

RR Kabel makes 3 Core PVC Insulated and sheathed Industrial Flat cables for Submersible Motor, working voltages upto and including 1100 Volts, as per IS 694



| Size (Sq.mm) | Configuration | Rate 100 mtr |
|--------------|---------------|--------------|
| 1.5 | 22/0.3 | 9384 |
| 2.5 | 36/0.3 | 14630 |
| 4.0 | 56/0.3 | 21449 |
| 6.0 | 84/0.3 | 31406 |
| 10.0 | 140/0.3 | 54685 |
| 16.0 | 126/0.4 | 84811 |
| 25.0 | 196/0.4 | 133207 |

* For XLPE Insulated Submersible Flat Cables (Cu/XLPE/PVC), contact us for pricing and availability. MOQ will be applicable.

ONLY THE BEST SUBMERSIBLE CABLES CAN WITHSTAND THE HARSHTEST CONDITIONS.

- PVC & XLPE Insulation
- Electrolytic Grade
Annealed Copper
- Better Conductivity
- CE, REACH &
RoHS Compliant



AKALMAND BANO, SAHI CHUNO.

SHIELDED CABLES



Flexible / Stranded Bare Copper Conductor, PVC Insulated, Overall Aluminium Mylar Tape Shielded with ATC Drain Wire and Outer PVC Sheathed Industrial Instrumentation (Shielded) Cables, Voltage Grade 300/500V, as per BS EN 50288-7

| SIZE | Size in Sq.mm / Rate Per 100 Meter (in INR) | | | | | MOQ (KM) |
|---------|---|-------|-------|-------|--------|----------|
| | 0.50 | 0.75 | 1.00 | 1.50 | 2.50 | |
| 2 Core | 5259 | 6381 | 7359 | 9414 | 13844 | 3 |
| 3 Core | 6647 | 8254 | 9715 | 12534 | 19241 | 3 |
| 4 Core | 8232 | 10448 | 12546 | 16404 | 24814 | 3 |
| 5 Core | 9461 | 12271 | 14759 | 19774 | 30817 | 3 |
| 6 Core | 11058 | 14408 | 17565 | 23042 | - | 3 |
| 7 Core | 12264 | 16027 | 19620 | 26233 | 40379 | 3 |
| 8 Core | 13900 | 18246 | 22217 | 30055 | 47929 | 2 |
| 9 Core | 15367 | - | - | - | - | 2 |
| 10 Core | 17043 | 22446 | 27651 | 37934 | 59442 | 2 |
| 12 Core | 19745 | 26243 | 32784 | 44311 | 70470 | 2 |
| 14 Core | 22482 | 30063 | 37734 | 51221 | 82593 | 1 |
| 16 Core | 25498 | 34589 | 42644 | 58066 | 94268 | 1 |
| 18 Core | 28312 | 38523 | 47602 | 64896 | 106370 | 1 |
| 20 Core | 31310 | 42245 | 52801 | 74320 | 118007 | 1 |
| 22 Core | 34476 | 46629 | 57784 | - | - | 1 |
| 25 Core | 38669 | 52481 | 65777 | - | - | 1 |
| 27 Core | 41435 | 56335 | 70012 | - | - | 1 |

Note : Please contact to Technical Cell / HO for Technical Data Sheet.

SHIELDED ARMoured CABLES



Flexible / Stranded Bare Copper Conductor PVC / XLPE Insulated,
 Overall Aluminium Mylar Tape Shielded with ATC Drain Wire, PVC Inner Sheathed, GI Wire / Strip Armour And Outer PVC Sheathed
 Industrial Instrumentation (Shielded Armoured) Cables, Voltage Grade 300/500V, as per BS EN 50288-7.

| SIZE | Size in Sq.mm / Rate Per 100 Meter (in INR) | | | | | MOQ (KM) |
|---------|---|-------|-------|-------|--------|----------|
| | 0.50 | 0.75 | 1.00 | 1.50 | 2.50 | |
| 2 Core | 10439 | 12108 | 13425 | 16112 | 21600 | 5 |
| 3 Core | 12572 | 14611 | 17021 | 19616 | 27979 | 5 |
| 4 Core | 14240 | 17059 | 20099 | 23548 | 35358 | 3 |
| 5 Core | 16335 | 19729 | 23492 | 27906 | 41534 | 3 |
| 6 Core | 18060 | 22139 | 26662 | 32819 | - | 3 |
| 7 Core | 19116 | 23752 | 27998 | 35841 | 54771 | 3 |
| 8 Core | 21972 | 26514 | 31280 | 40513 | 61447 | 3 |
| 9 Core | 23269 | - | - | - | - | 3 |
| 10 Core | 24994 | 30835 | 38473 | 49914 | 75593 | 3 |
| 12 Core | 28257 | 34988 | 43480 | 56422 | 88759 | 3 |
| 14 Core | 31335 | 39290 | 50081 | 64988 | 98956 | 3 |
| 16 Core | 35025 | 46372 | 54104 | 73128 | 111825 | 3 |
| 18 Core | 40254 | 47485 | 60483 | 81230 | 123226 | 3 |
| 20 Core | 43832 | 52492 | 66268 | 92337 | 135186 | 2 |
| 22 Core | 45241 | 57424 | 71792 | - | - | 2 |
| 24 Core | - | - | 77856 | - | - | 2 |
| 25 Core | 49544 | 63337 | 80285 | - | - | 2 |
| 27 Core | 52065 | 66879 | 89092 | - | - | 2 |

Note : Please contact to Technical Cell / HO for Technical Data Sheet.

BRAIDED CABLES



Flexible / Stranded Bare Copper Conductor, PVC Insulated, Annealed Tinned Copper Braided with Optimum coverage and Outer PVC sheathed Industrial Braided cables, Voltage Grade 300/500V.

| Size in Sq.mm / Rate Per 100 Meter (in INR) | | | | | | |
|---|-------|-------|-------|-------|-------|-------|
| SIZE | 0.25 | 0.50 | 0.75 | 1.00 | 1.50 | 2.50 |
| 2 Core | 7012 | 8077 | 8683 | 9827 | 12533 | 18168 |
| 3 Core | 7545 | 8924 | 10787 | 12415 | 16200 | 24085 |
| 4 Core | 9072 | 11019 | 13363 | 15716 | 20266 | 30888 |
| 5 Core | 11361 | 12625 | 16000 | 18734 | 24768 | 38051 |
| 6 Core | 13385 | 14079 | 16928 | 21252 | 27811 | - |
| 7 Core | 14131 | 15138 | 19705 | 23456 | 31087 | 48361 |
| 8 Core | 15142 | 17074 | 22058 | 26714 | 35911 | - |
| 9 Core | - | - | - | - | 40176 | - |
| 10 Core | 18089 | 21692 | 27765 | 33082 | 44633 | - |
| 12 Core | 20041 | 23593 | 31845 | 38706 | 51988 | 80876 |
| 14 Core | - | 27026 | 36341 | 44775 | 60315 | - |
| 16 Core | - | 30423 | 40971 | 50400 | 67910 | - |
| 18 Core | 28208 | 33573 | 45483 | 55842 | 75861 | - |

| Size in Sq.mm / Rate Per 100 Meter (in INR) | | | | |
|---|-------|-------|--------|--------|
| SIZE | 4.0 | 6.0 | 10.0 | 16.0 |
| 2 Core | 26483 | 36496 | - | - |
| 3 Core | 36356 | 50570 | - | - |
| 4 Core | 45771 | 64491 | 108267 | 175147 |

Note : Minimum Order Quantity (MOQ)

Size - upto 0.25 x 8C - 5 KM, upto 0.25 x 8C to 18C and 0.50 to 1.50 x 7C - 3 KM,
 0.50 x 8C to 4.0 x 4C - 2 KM, 0.50 x 22C to 1.00 x 27C - 2 KM.

PAIR SHIELDED CABLES



Flexible / Stranded Bare Copper Conductor, PVC / XLPE Insulated, Twisted Pairs, Overall Aluminium Mylar Tape Shielded with ATC Drain Wire and Outer PVC Sheathed Industrial Instrumentation (Pair Shielded) Cables, Voltage Grade 300/500V, as per BS EN 50288-7.

| Size in Sq.mm / Rate Per 100 Meter (in INR) | | | | | | | |
|---|-------|--------|----------|--------|--------|--------|----------|
| Number of Pair | 0.50 | 0.75 | MOQ (KM) | 1.00 | 1.50 | 2.50 | MOQ (KM) |
| 1 | 6427 | 7951 | 10 | 9566 | 11127 | 16011 | 5 |
| 2 | 10429 | 12798 | 5 | 15864 | 20087 | 29819 | 3 |
| 3 | 13496 | 17039 | 3 | 21483 | 27799 | 42011 | 3 |
| 4 | 15699 | 21703 | 3 | 27579 | 36044 | 54883 | 3 |
| 5 | 19133 | 26716 | 3 | 34189 | 43682 | 66909 | 3 |
| 6 | 22328 | 31380 | 3 | 40322 | 51761 | 79542 | 2 |
| 8 | 28662 | 39587 | 3 | 51137 | 67809 | 104716 | 2 |
| 10 | 34942 | 48548 | 3 | 62943 | 83802 | 129816 | 2 |
| 12 | 41185 | 57472 | 3 | 74713 | 99740 | 154861 | 2 |
| 14 | - | - | - | - | 114411 | - | 1 |
| 16 | 54001 | 75870 | 2 | 98987 | 132680 | 206659 | 1 |
| 20 | 66432 | 93699 | 2 | 122545 | 164666 | 256951 | 1 |
| 24 | 78808 | 111473 | 2 | 146029 | 196560 | 307170 | 1 |

Flexible / Stranded Bare Copper Conductor, PVC / XLPE Insulated, Twisted Pairs, Individual pair and Overall Aluminium Mylar Tape Shielded with ATC Drain Wire and Outer PVC Sheathed Industrial Instrumentation (Pair Shielded) Cables as per BS EN 50288-7.

| Size in Sq.mm / Rate Per 100 Meter (in INR) | | | | | | | |
|---|--------|--------|----------|--------|--------|--------|----------|
| Number of Pair | 0.50 | 0.75 | MOQ (KM) | 1.00 | 1.50 | 2.50 | MOQ (KM) |
| 2 | 13532 | 15754 | 5 | 19298 | 23466 | 33473 | 2 |
| 3 | 17241 | 21446 | 5 | 26587 | 32794 | 47428 | 2 |
| 4 | 22015 | 26863 | 3 | 32610 | 42691 | 62080 | 2 |
| 5 | 27028 | 33216 | 3 | 40505 | 51816 | 75760 | 1 |
| 6 | 31802 | 39220 | 2 | 47942 | 61511 | 90155 | 1 |
| 8 | 41313 | 51174 | 2 | 62760 | 80846 | 118909 | 1 |
| 10 | 50770 | 63090 | 1 | 77522 | 100107 | 147590 | 1 |
| 12 | 60207 | 74970 | 1 | 92267 | 115953 | 176215 | 1 |
| 16 | 79487 | 96655 | 1 | 119221 | 154439 | 228601 | 1 |
| 20 | 98399 | 119846 | 1 | 148012 | 192006 | 284567 | 1 |
| 24 | 117293 | 143036 | 1 | 176785 | 229556 | 340514 | 1 |
| 25 | - | - | - | 183982 | - | - | 1 |

Note: The MOQ is given above, please send your requisition to Technical Cell / HO for Technical Data Sheet before finalizing the orders.

PAIR SHIELDED ARMoured CABLES



Flexible / Stranded Bare Copper Conductor, PVC / XLPE Insulated, Twisted Pairs, Overall Aluminium Mylar Tape Shielded with ATC Drain Wire, PVC Inner Sheathed, GI Wire/Strip Armour and Outer PVC Sheathed Industrial Instrumentation (Overall Pair Shielded Armoured) Cables, Voltage Grade 300/500V, as per BS EN 50288-7.

| Size in Sq.mm / Rate Per 100 Meter (in INR) | | | | | | | |
|---|-------|--------|----------|--------|--------|--------|----------|
| Number of Pair | 0.50 | 0.75 | MOQ (KM) | 1.00 | 1.50 | 2.50 | MOQ (KM) |
| 1 | 10439 | 12108 | 10 | 13424 | 16113 | 21601 | 5 |
| 2 | 15872 | 19061 | 5 | 21675 | 26978 | 37306 | 3 |
| 3 | 18616 | 22361 | 3 | 26755 | 34172 | 50971 | 3 |
| 4 | 22509 | 27441 | 3 | 33171 | 44963 | 61224 | 3 |
| 5 | 25736 | 32726 | 3 | 39920 | 51156 | 75371 | 3 |
| 6 | 29314 | 37639 | 3 | 48227 | 59704 | 88499 | 2 |
| 8 | 38325 | 46094 | 3 | 57219 | 76762 | 114457 | 2 |
| 10 | 41959 | 55365 | 3 | 69141 | 93412 | 140174 | 2 |
| 12 | 48560 | 64525 | 3 | 80915 | 109617 | 165687 | 2 |
| 14 | - | - | - | - | 125118 | - | 1 |
| 16 | 61873 | 83122 | 2 | 104964 | 143307 | 218048 | 1 |
| 20 | 74648 | 101014 | 2 | 128140 | 176330 | 268722 | 1 |
| 24 | 87256 | 118740 | 2 | 151113 | 208221 | 319137 | 1 |

Flexible / Stranded Bare Copper Conductor, PVC / XLPE Insulated, Twisted Pairs, Individual Pair and Overall Aluminium Mylar Tape Shielded with ATC Drain Wire, PVC Inner Sheathed, GI Wire / Strip Armour and Outer PVC Sheathed Industrial Instrumentation (Individual Pair and Overall Shielded Armoured) Cables, Voltage Grade 300/500V, as per BS EN 50288-7.

| Size in Sq.mm / Rate Per 100 Meter (in INR) | | | | | | | |
|---|--------|--------|----------|--------|--------|--------|----------|
| Number of Pair | 0.50 | 0.75 | MOQ (KM) | 1.00 | 1.50 | 2.50 | MOQ (KM) |
| 2 | 18692 | 21850 | 5 | 25100 | 29544 | 39367 | 2 |
| 3 | 22915 | 26496 | 5 | 30847 | 38688 | 50127 | 2 |
| 4 | 27432 | 32996 | 3 | 39312 | 48750 | 64229 | 2 |
| 5 | 34556 | 41626 | 3 | 47409 | 56058 | 79193 | 1 |
| 6 | 39753 | 44967 | 2 | 53359 | 65679 | 93203 | 1 |
| 8 | 46528 | 57306 | 2 | 68360 | 84702 | 120984 | 1 |
| 10 | 56149 | 69480 | 1 | 83178 | 103541 | 148545 | 1 |
| 12 | 65679 | 81562 | 1 | 97885 | 122251 | 175958 | 1 |
| 16 | 84922 | 106093 | 1 | 127833 | 160498 | 232163 | 1 |
| 20 | 103724 | 129999 | 1 | 157028 | 197735 | 286844 | 1 |
| 24 | 122416 | 153814 | 1 | 186094 | 234844 | 341359 | 1 |
| 25 | - | - | - | 193347 | - | - | 1 |

Note: The MOQ is given above, please send your requisition to Technical Cell / HO for Technical Data Sheet before finalizing the orders.

TERMS & CONDITIONS:

GST : The above prices are exclusive of GST.

Packing : Order should be in Standard packing.

Freight : Value upto Rs. 2,00,000/- on 'TO-PAY' basis & above on 'PAID' basis

Note: This is Revised Price List, hence all previous Price List & Discount will not be considered.

**As per the international practice which is also adopted by BIS, for all cables with ISI mark the size of the conductor is decided by its resistance only. The construction of the conductor mentioned in the price-list are only for guidelines and are as per market convention, it may vary within the prescribed limit of IS 8130, with related classes and tables

THE PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.



WORLD OF EXCELLENCE



As a USD 850 + million conglomerate, we are one of the largest, diversified & most prominent brands in the Indian electrical industry, with a noteworthy presence in over 85+ countries across the world. We offer a multi faceted range of quality products through our 10 successfully operating companies, 42 marketing offices and 12 manufacturing facilities.

At RR Global, we continue to innovate to ensure only the finest products reach our customers.



Ram Ratna House, Oasis Complex, P. B. Marg, Worli, Mumbai - 400 013.

T: +91 - 22 - 2494 9009 / 2492 4144 • **F:** +91 - 22 - 2491 2586 • **E:** mumbai.rrkabel@rrglobal.com

305/A, Windsor Plaza, R. C. Dutt Road, Alkapuri, Vadodara - 390 007.

T: +91 - 265 - 2321 891 / 2 / 3 • **F:** +91 - 265 - 2321 894 • **E:** vadodara.rrkabel@rrglobal.com

R R KABEL LIMITED

Regd. Office : Ram Ratna House, Oasis Complex, P. B. Marg, Worli, Mumbai - 400 013.

Ahmedabad: 079 - 4900 0100, **Bengaluru:** 080 - 4125 0079 / 4090 2221, **Bhubaneswar:** 0674 - 2971 231,
Chennai: 044 - 2829 2329 / 2429, **Coimbatore:** 0422 - 2910 560, **Guwahati:** 0361 - 2730772,
Haryana: 0130 - 2986 986, **Indore:** 0731 - 4009 863, **Jaipur:** 0141 - 2741417, **Jalandhar:** 0181 - 500 3394,
Ernakulam: 0484 - 2378 782, **Kolkata:** 033 - 6607 1233 / 2262 8660, **Lucknow:** 0522 - 4113 745 / 46,
Madurai: 0452 - 4370 340, **New Delhi:** 011 - 4303 8395 / 2735 5477 / 78, **Pune:** 8956 811 100,
Raipur: 0771 - 2971 518, **Rajkot:** 0932 7722 501, **Secunderabad:** 040 - 2780 4098,
Silvassa: 0260 - 2641 333, **Surat:** 9376 507 543, **Trichy:** 8939 830 338.

www.rrkabel.com • www.rrglobal.com

The technical data mentioned in the book has been derived to have the best production place. Having known that innovation has always been the base for R R Kabel products, the technical data would vary from time to time. Hence, current details should always be checked with R R Kabel for accuracy.

REACH = Registration, Evaluation, Authorisation and Restriction of Chemicals
RoHS = Restriction of Hazardous Substances | **CE** = Conformance Européenne
ISI = Indian Standard Institution